Qulite™


Since 2011, Qulite LED India has been at the forefront of lighting design, crafting sophisticated solutions that define and elevate exclusive spaces. Qulite creates exceptional LED lighting fixtures that are masterworks of precision, uniting sustainable efficiency with uncompromising performance and exquisite design. Our curated collection illuminates everything from high-end private residences to prestigious commercial landmarks.

Our reputation for unwavering quality and reliable craftsmanship is recognised by those who insist upon ultimate perfection and standards. We partner with visionary architects and influential developers who demand the best in illumination. Our expanding portfolio proves the confidence placed in our superior, and precisely engineered products.

With the assurance of in-house R&D and world-class precision manufacturing, we ensure that every fixture is a testament to excellence. We elevate light beyond a necessity, establishing it as a defining feature of luxury and a benchmark for reliable performance.

Qulite™

# PRODUCT CATALOGUE

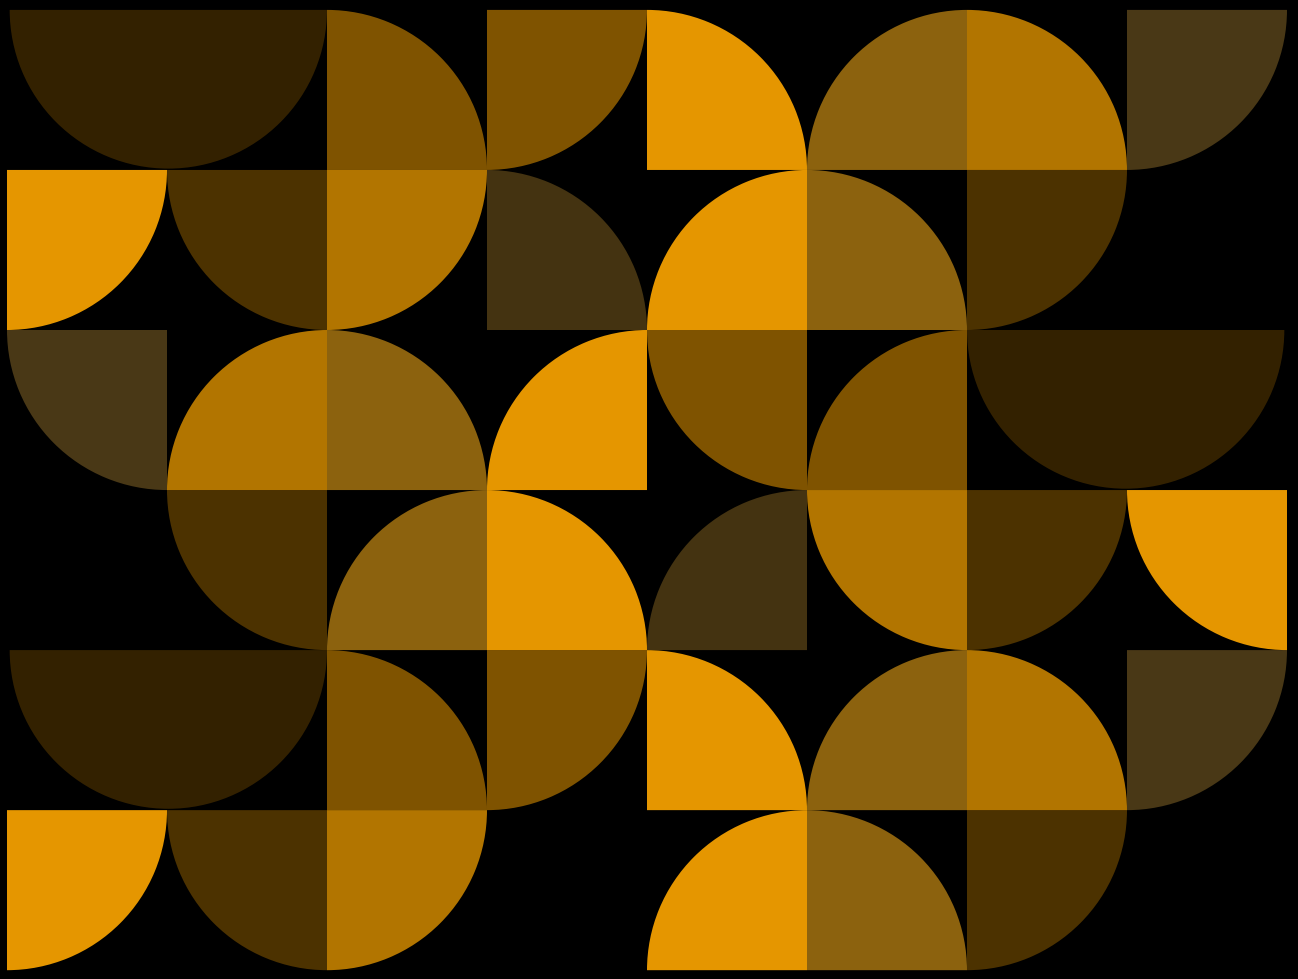

www.qulite.in





# Purpose.
# Passion.
# Performance.

**Holding ourselves to a higher standard**

Qulite has introduced innovations that have continually redefined the standards for living beautifully and responsibly, whether at home, at work, or across the globe.

# INDEX

## Linear Systems


| | |
|---|---|
| Mini Linea | 07 |
| Linea | 08 |
| Linea XL | 09 |
| Linea Wall Wash | 10 |


## COB Systems


| | |
|---|---|
| Crinkle | 11 |
| Groove | 12 |
| Groove Pro | 12 |
| Crease | 13 |
| Verge | 13 |
| Even | 14 |
| Apollo Module | 14 |
| Trio Tilt | 15 |
| Q Star | 15 |
| Rhythm | 16 |
| Zoom | 16 |
| Canny | 17 |


## Track Systems


| | |
|---|---|
| Tonic Track / Surface | 18 |
| Raise Track | 18 |
| Raise Surface | 19 |
| Track Base Surface / Hanging | 19 |
| Track Base Recess | 20 |


## Downlight Systems


| | |
|---|---|
| Dime Slim | 21 |
| Slick Panel | 22 |
| Asta Slim | 23 |
| Asta Surface | 23 |
| 2X2 Backlit | 24 |


## Strip System


| | |
|---|---|
| LED Strip Roll | 25 |
| Strip Drivers | 26 |


## Profile Systems


| | |
|---|---|
| 8X9 Trimless Profile | 27 |
| 8X9 Trim / Collar Profile | 27 |
| 16X6 Trimless Profile | 27 |
| 16X6 Trim / Collar Profile | 27 |


## Profile Systems


| | |
|---|---|
| 17x6 Trimless Profile | 28 |
| 17x6 Trim / Collar Profile | 28 |
| 17x14 Trimless Profile | 28 |
| 17x14 Trim / Collar Profile | 28 |
| 25x25 Trimless Profile | 29 |
| 25x25 Trim / Collar Profile | 29 |
| 35x35 Trimless Profile | 29 |
| 35x35 Trim / Collar Profile | 29 |
| 50x35 Trimless Profile | 30 |
| 50x35 Trim / Collar Profile | 30 |
| 10x10 Trimless Profile | 30 |
| 20x10 Trimless Profile | 30 |
| 30x10 Trimless Profile | 31 |
| 8x8 Round Diff Corner 45'L Profile | 31 |
| 16x16 Round Diff Corner 45'L Profile | 31 |
| 16x16 Square Diff Corner 45'L Profile | 31 |
| 50x70 Aluminium Length Hanging / Surface | 32 |
| 50x70 Black Length Hanging / Surface | 32 |
| PxG512 Wardrobe Profile | 32 |
| PxG30 Round Profile | 32 |
| PxG60 Round Profile | 33 |
| 35X68 Hanging / Surface | 33 |


## Outdoor Systems


| | |
|---|---|
| Blaze Flood Light | 34 |
| Flare Hibay | 35 |
| 8080 Footlight | 36 |
| 990 Footlight | 36 |
| 9306 5x3 Footlight | 37 |
| 8401 Round / Square Footlight | 37 |
| 33 Footlight | 38 |
| 9081 Footlight | 38 |
| 26 Footlight | 39 |
| 25 Footlight | 40 |
| 8090 Ring Footlight | 40 |
| 2007 - Uplight / Updownlight | 41 |
| 4002 Square Lens | 42 |
| 4002 Round & Square Lens | 42 |
| 4002 Round Lens | 43 |
| 881 Round | 43 |
| 881 Square | 44 |
| 8091 K Type | 45 |
| 7020 4 Way | 45 |
| 234 Updownlight | 46 |
| 642- 1 Light | 47 |

# INDEX

## Outdoor Systems


| | |
|---|---|
| 642- 2 Light | 47 |
| 642- 3 Light | 48 |
| 1404 Light | 49 |
| 9090 Updownlight | 50 |
| 2004  Lens 4-Way | 51 |
| 5100 Cap Spike Light | 51 |
| 5100 Cap Surface | 52 |
| 4040 Spike Light | 52 |
| 4095 Cap Spike Light GU-10 | 53 |
| 4095 Cap Surface Light GU-10 | 53 |
| 4050 Burial | 54 |
| Trick Light AMS | 55 |
| 7080 Wall Light | 56 |
| 7080 Bollard | 56 |
| 4041 Bollard | 57 |
| 3688 Bollard | 57 |
| 1224 Bollard | 58 |
| 888 Bollard | 58 |
| 3500 Bollard | 59 |
| 7711 Bollard | 60 |
| 303 Bollard | 60 |
| 202 Bollard | 61 |
| 404 Bollard | 61 |
| 999 Gate Light | 62 |
| 999 Wall Light | 62 |
| 201 Gate Light | 63 |
| 201 Wall Light | 63 |
| 501 Gate Light | 64 |
| 501 Wall Light | 64 |
| 444 Gate Light | 65 |
| 444 Wall Light | 65 |
| 8802 Gate Light | 66 |
| 8910 Wall Light | 66 |
| Storm Street Light | 67 |

# INDEX

## Magnetic Track System 20 mm


Track Surface 72
Track Recessed 74
Lanky Series 75
Angle Series 77
Speck Series 79
Speck Adjust Series 81
Beamer Series 83
Retina Series 85
Pendant Series 87


## Magnetic Track System 10mm


Track Recessed & Surface 89
Track Round Surface 91
Connectors 93
Lanky Series 95
Speck Series 97
Speck Adjust Series 99
Beamer 101
Halo Series 103
Band Series 105
Drop series 107
Bubble Series 109
Loop Series 111


## Linear Systems


Beeline 113
Beeline Wall Washer 115
Mini Beeline 117
Beetle 119


## Cob Systems


Nimble Series 121
Neat 125
Rare Trimless 127
Rare Trim 129
Agile 131
Quick 133
Privy 135
Airy 137
Stringy 139
Trento 141
Lofty 143
Boxy 145
Modena 147


## Cob Systems


Ritzy 151
Dreamy Wall Washer 153
Mini Dreamy Wall Washer 155
Cubik 157
Edge 159
Razor 161
Phantom 163
Shadow 165
Sharp 167
Keen 169
Broad 171
Squire 173
Vogue 175
Lacuna Trim 177
Lacuna Trimless 179
Gush 181
Brink 183
Fold 185
Active 187
Pin Point 189
Accent Spot 191
Astar Fix 193
Flame 195
Denso 197
Sweep 199
Shoot 201
Chase 203
Sparkle 205
Glow 207
Flash 209


## Track Systems


Boost Track & Surface 211
Crisp Track & Surface 213


## Downlight Systems



Glint 215
Sapphire 217


## Outdoor Systems


Trappy 219


## Nomenclature


222

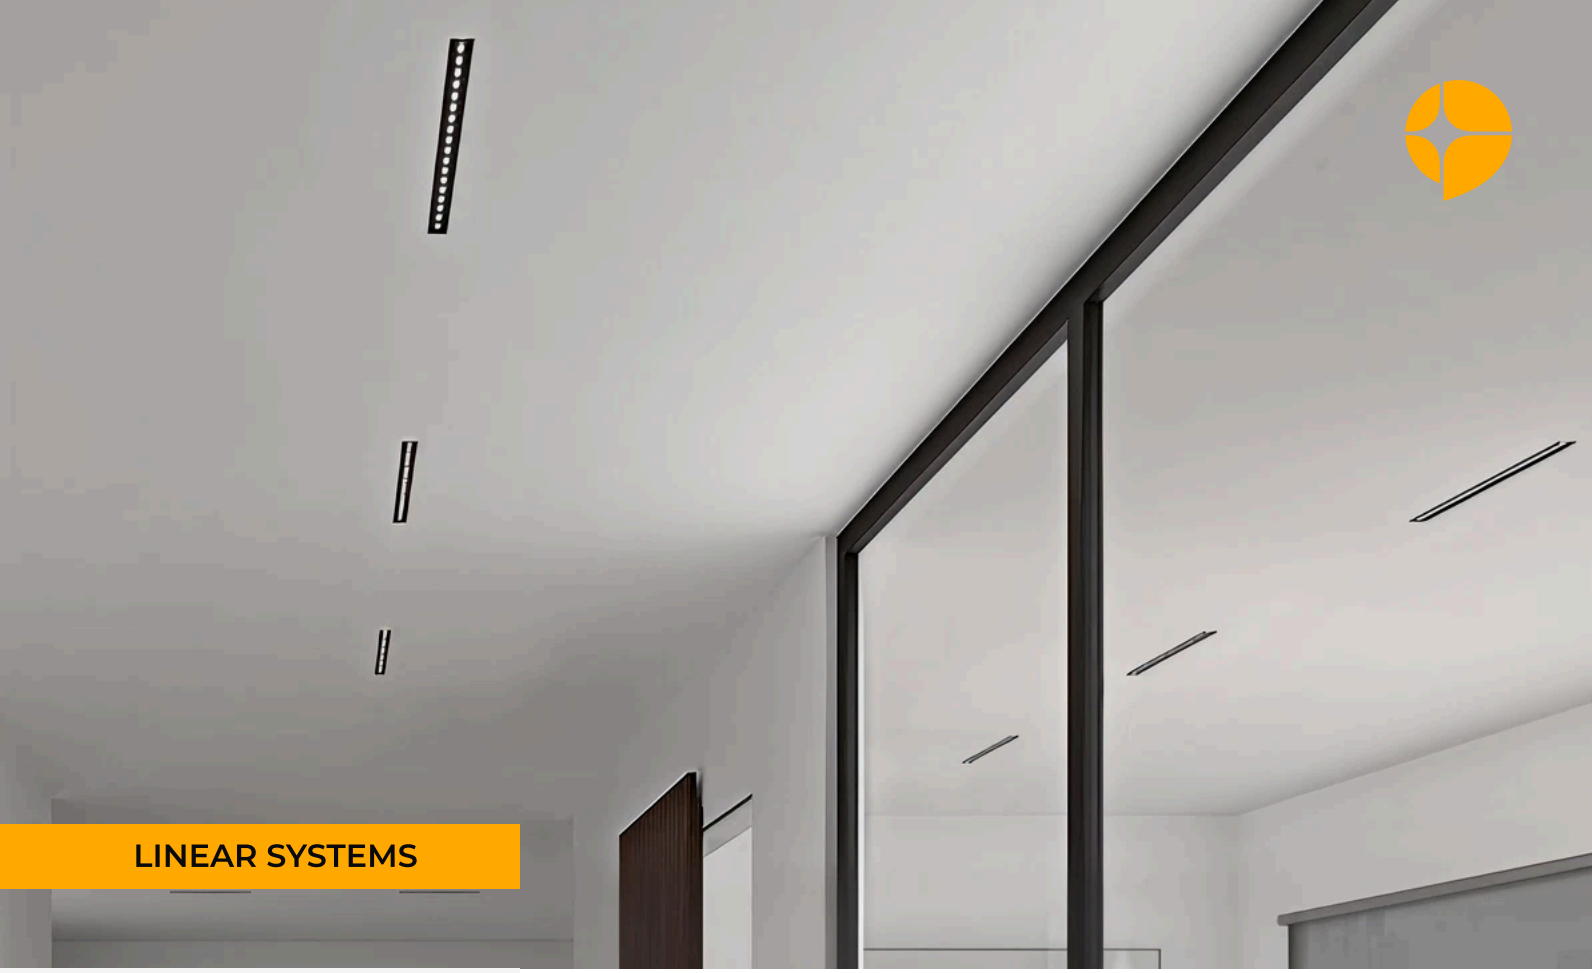

LINEAR SYSTEMS











# Mini Linea

| Model | W | LEDs | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|---|
| Mini Linea | 6W | 3 | 74(L)x34(W)x40(H) | 62x25 |
| Mini Linea | 8W | 4 | 54(L)x54(W)x40(H) | 45x45 |
| Mini Linea | 12W | 6 | 134(L)x33(W)x40(H) | 125x26 |
| Mini Linea | 18W | 9 | 73(L)x73(W)x40(H) | 65x65 |
| Mini Linea | 24W | 12 | 255(L)x34(W)x40(H) | 247x26 |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Philips / Osram |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 30° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Black / Nickel |



LINEAR SYSTEMS













# Linea

| Model | W | LEDs | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|---|
| Linea | 3W | 1 | 44(L)x44(W)x40(H) | 36x36 |
| Linea | 5W | 2 | 44(L)x75(W)x40(H) | 65x35 |
| Linea | 12W | 5 | 146(L)x44(W)x40(H) | 138x35 |
| Linea | 24W | 10 | 281(L)x44(W)x40(H) | 272x35 |
| Linea | 30W | 15 | 415(L)x45(W)x40(H) | 405x35 |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Philips / Osram |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 30° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Black / Rose Gold |



LINEAR SYSTEMS














# Linea XL

| Model | W | LEDs | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|---|
| Linea XL | 4W | 1 | 51(L)x51(W)x55(H) | 41x41 |
| Linea XL | 12W | 3 | 128(L)x50(W)x55(H) | 118x42 |
| Linea XL | 16W | 4 | 90(L)x90(W)x55(H) | 80x80 |
| Linea XL | 20W | 5 | 205(L)x52(W)x55(H) | 195x42 |
| Linea XL | 36W | 9 | 128(L)x128(W)x55(H) | 118x118 |
| Linea XL | 40W | 10 | 395(L)x52(W)x55(H) | 385x42 |

## Product Properties

| | |
|---|---|
| LED | Bridgelux-Osram |
| Driver Brand | Fulham / Osram |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 3500k, 4000k, 5000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 30° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Nickel / Rose Gold |

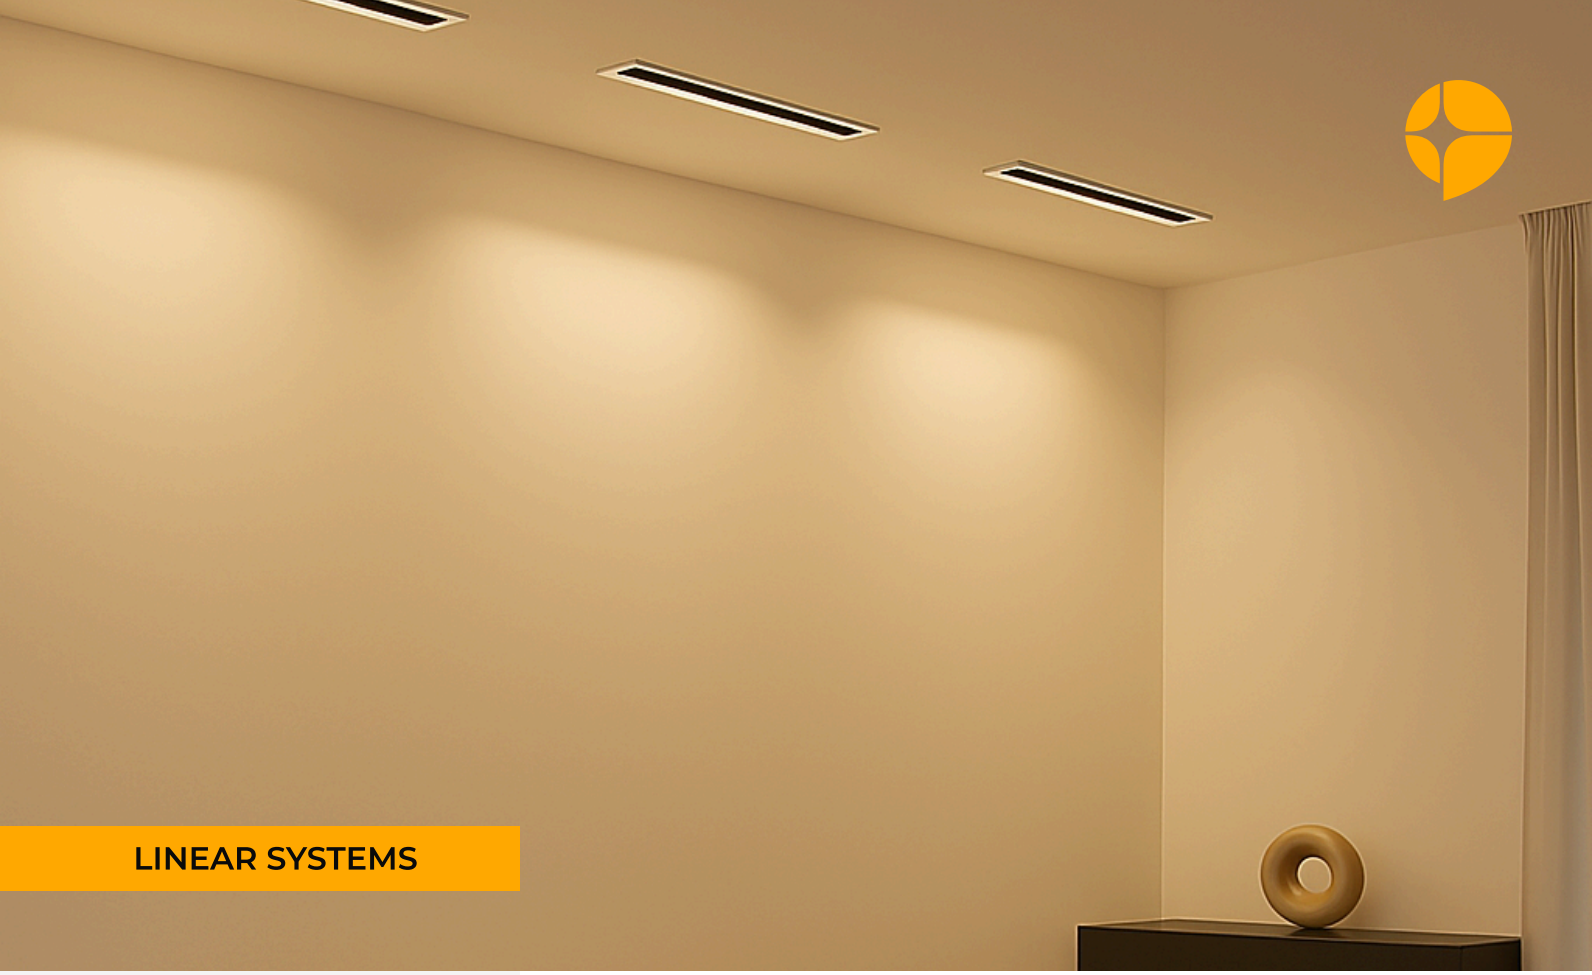

LINEAR SYSTEMS



# Linea Wall Wash

| Model | W | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|
| Linea Wall Wash | 12W | 146(L)x44(w)x40(H) | 138x35 |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Philips / Osram |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | Wall Wash |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Black |












# Crinkle


| Model | W | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|
| Crinkle | 3W | Dia 42x46(H) | Dia 36 |
| Crinkle | 7W | Dia 68x62(H) | Dia 60 |
| Crinkle | 12W | Dia 85x73(H) | Dia 75 |
| Crinkle | 15W | Dia 85x88(H) | Dia 75 |
| Crinkle | 18W | Dia 95x92(H) | Dia 81 |
| Crinkle | 30W | Dia 120x96(H) | Dia 110 |
| Crinkle | 40W | Dia 140x110(H) | Dia 127 |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Philips / Osram / Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 36° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Pkwh / Black |

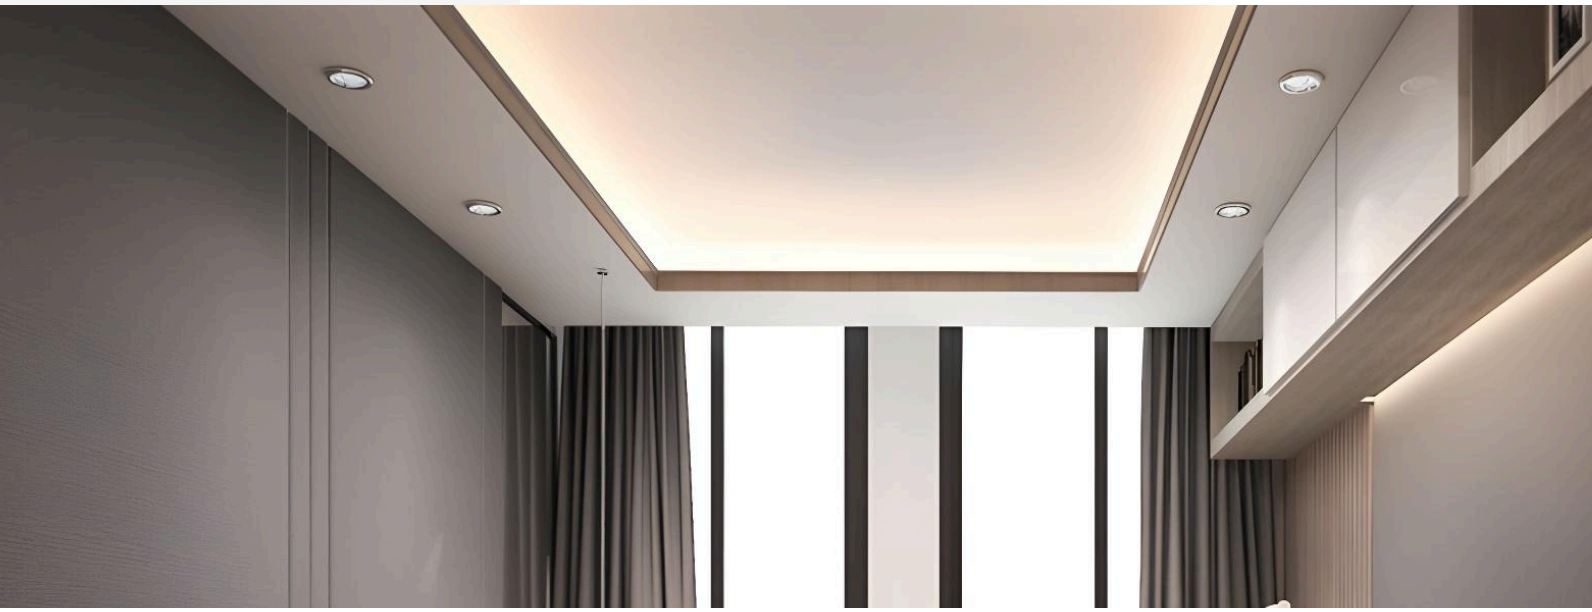







## Groove

| Model | W | Shape | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|---|
| Groove | 7W | Round | Dia 70x50(H) | Dia 60 |
| Groove | 12W | Round | Dia 85x65(H) | Dia 75 |
| Groove | 15W | Round | Dia 95x 75(H) | Dia 85 |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Philips |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 36° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Nickel / Rose Gold |





## Groove Pro

| Model | W | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|
| Groove Pro | 7W | Dia 62x50(H) | Dia 52 |
| Groove Pro | 12W | Dia 84x60(H) | Dia 74 |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Philips |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 36° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Nickel |






## Crease

| Model | W | Shape | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|---|
| Crease | 7W | Round | Dia 63x77(H) | Dia 54 |
| Crease | 12W | Round | Dia 85x85(H) | Dia 73 |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Philips |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 36° |
| Swivel Angle | Tiltable |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Pkwh / Black / Nickel |





## Verge

| Model | W | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|
| Verge | 7W | Dia 61x45(H) | Dia 51 |
| Verge | 12W | Dia 81x50(H) | Dia 72 |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Philips |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 36° |
| Swivel Angle | Tiltable |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Nickel |





## Even

| Model | W | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|
| Even 7503 | 3W | Dia 65x35(H) | Dia 55 |
| Even 7506 | 6W | Dia 85x45(H) | Dia 70 |
| Even 7510 | 10W | Dia 105x60(H) | Dia 95 |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Philips |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 36° |
| Swivel Angle | Tiltable |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Pkwh / Black |





## Apollo Module

| Model | W | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|
| Apollo Module | 10W | Dia 50x80 (H) | N.A. |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Philips |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 36° |
| Swivel Angle | Swivel Angle: As per the Fixture |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Black |





## Trio Tilt

| Model | W | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|
| Trio Tilt | 30W | Dia 120x82(H) | Dia 110 |
| Trio Tilt | 40W | Dia 138x86(H) | Dai 128 |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 45° |
| Swivel Angle | Tiltable |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Pkwh / Black |





## Q Star

| Model | W | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|
| Q Star | 30W | Dia 104x75(H) | Dia 90 |
| Q Star | 40W | Dia 124x80(H) | Dia 110 |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 45° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Pkwh / Black |





## Rhythm

| Model | W | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|
| Rhythm | 15W | Dia 125x80(H) | Dia 110 |
| Rhythm | 20W | Dia 148x83(H) | Dia 132 |
| Rhythm | 30W | Dia 171x82(H) | Dia 154 |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 36°, 60° |
| Swivel Angle | Tiltable |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Pkwh / Black |





## Zoom

| Model | W | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|
| Zoom 8520 | 20W | Dia 152x115(H) | Dia 138 |
| Zoom 85130 | 30W | Dia 190x150(H) | Dia 170 |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 36° |
| Swivel Angle | Zoom |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Pkwh / Black |



COB SYSTEMS



## Canny

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| Canny TD050 | 50W | Dia 230x205 (H) | Dia 205 |

| Product Properties | |
|---|---|
| LED | Cree |
| Driver Brand | Philips / Osram |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 36° |
| Swivel Angle | Tiltable |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Pkwh / Black |





## Tonic Track & Surface

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| Tonic Track | 30W | Dia 90 X 160(W) | N.A. |
| Tonic Surface | 30W | Dia 90 X 160(W) | N.A. |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 36° |
| Swivel Angle | 355° |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Pkwh / Black |



## Raise Track

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| Raise Track | 20W | Dia 90x92(W) | N.A. |
| Raise Track | 30W | Dia 90x92(W) | N.A. |
| Raise Track | 40W | Dia 110x106(W) | N.A. |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 36° |
| Swivel Angle | 355° |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Pkwh / Black |



## Raise Surface

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| Raise Surface | 20W | Dia 90x92(W) | N.A. |
| Raise Surface | 30W | Dia 90x92(W) | N.A. |
| Raise Surface | 40W | Dia 110x106(W) | N.A. |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 36° |
| Swivel Angle | 355° |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Pkwh / Black |




## Track Base Surface/Hanging

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| Track Base (surface/Hanging)-1M | N.A. | 33.4(W)x20.5(H)x1000(L) | N.A. |
| Track Base (surface/Hanging)-2M | N.A. | 33.4(W)x20.5(H)x2000(L) | N.A. |

| Product Properties | |
|---|---|
| LED | N.A. |
| Driver Brand | N.A. |
| Input Voltage | 220V / 50Hz |
| CCT | N.A. |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | N.A. |
| Swivel Angle | N.A. |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | White / Black |
| Reflector | N.A. |

# Track Base Recess

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| Track Base Recess-1M | N.A. | 60(W)x21(H)x1000(L) | 33.4 |
| Track Base Recess-2M | N.A. | 60(W)x21(H)x2000(L) | 33.4 |



| Product Properties | |
|---|---|
| LED | N.A. |
| Driver Brand | N.A. |
| Input Voltage | 220V / 50Hz |
| CCT | N.A. |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | N.A. |
| Swivel Angle | N.A. |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | White / Black |
| Reflector | N.A. |





DOWNLIGHT SYSTEMS






# Dime Slim

| Model | W | Shape | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|---|
| Dime Slim | 7W | Round | Dia 105x35(H) | Dia 90 |
| Dime Slim | 14W | Round | Dia 150x35(H) | Dia 125 |
| Dime Slim | 20W | Round | Dia 180x40(H) | Dia 150 |
| Dime Slim | 7W | Square | 105(L)x105(W)x35(H) | 90(L)x90(W) |
| Dime Slim | 14W | Square | 150(L)x150(W)x35(H) | 125(L)x125(W) |
| Dime Slim | 20W | Square | 180(L)x180(W)x40(H) | 150(L)x150(W) |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Philips |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 120° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Diffused |






## Slick Panel

| Model | W | Shape | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|---|
| Slick | 6W | Round | Dia 90x35(H) | Dia 75 |
| Slick | 14W | Round | Dia 120x35(H) | Dia 106 |
| Slick | 20W | Round | Dia 170x35(H) | Dia 158 |
| Slick | 6W | Square | 90(L)x90(W)x35(H) | 75(L)x75(W) |
| Slick | 14W | Square | 120(L)x120(W)x35(H) | 106(L)x106(W) |
| Slick | 20W | Square | 170(L)x170(W)x35(H) | 158(L)x158(W) |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Philips |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 120$^{o}$ |
| Swivel Angle | Fixed |
| Operating Temp | 0-50$^{o}$c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Diffused |

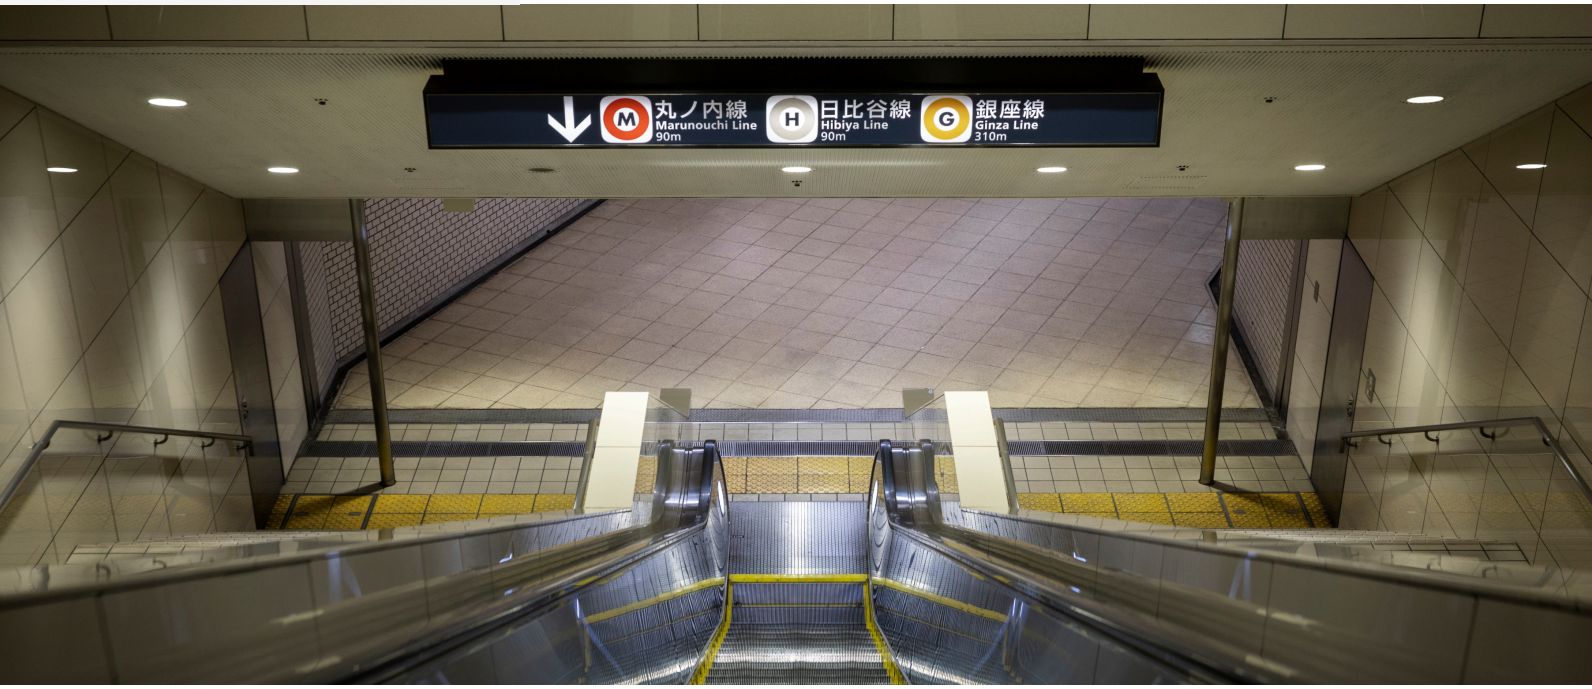





## Asta Slim

| Model | W | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|
| Asta Slim | 26W | 200x35x175 Dia | Dia 170 |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 120° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Diffused |









## Asta Surface

| Model | W | Dimension(mm) | Cut Out(mm) |
|---|---|---|---|
| Asta Surface | 7W | Dia 93x57(H) | N.A. |
| Asta Surface | 14W | Dia 123x57(H) | N.A. |
| Asta Surface | 20W | Dia 143x57(H) | N.A. |
| Asta Surface | 26W | Dia 173x57(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Philips / Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | 120° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Diffused |






# 2X2 Backlit


| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 2X2 Backlit Recess | 36W | 595(L)x595(W)x60(H) | 565x565 |
| 2X2 Backlit Recess | 48W | 595(L)x595(W)x60(H) | 565x565 |
| 2X2 Backlit Surface | 36W | 645(L)x645(W)x63(H) | N.A. |
| 2X2 Backlit Surface | 48W | 645(L)x645(W)x63(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite / Osram |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 4000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-20 |
| Beam Angle | $120^{o}$ |
| Swivel Angle | Fixed |
| Operating Temp | $0\text{-}50^{o}c$ |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Pkwh / Black |
| Reflector | Diffused |









# LED Strip Roll

| Model | W | Dimension(mm) |
|---|---|---|
| 60 LED 8mm 12V LED STRIP IP20 (INDOOR) | 5W/M | 8x5000(Roll) |
| 120 LED 5mm 24V LED STRIP IP20 (INDOOR) | 12W/M | 5x5000(Roll) |
| 120 LED 8mm 24V LED STRIP IP20 (INDOOR) | 12W/M | 8x5000(Roll) |
| 240 LED 10mm 24V LED STRIP IP20 (INDOOR) | 22W/M | 10x5000(Roll) |
| 120 LED 8mm RGB 24V LED STRIP IP20 (INDOOR) | 12W/M | 8x5000(Roll) |
| 120 LED 8mm TUNABLE 24V LED STRIP IP20 (INDOOR) | 12W/M | 8x5000(Roll) |
| 120 LED 10mm 24V LED STRIP IP65 (OUTDOOR) | 12W/M | 10x5000(Roll) |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | N.A. |
| Input Voltage | 24V |
| CCT | 3000k, 4000k, RGB Tunable |
| Housing Material | N.A. |
| IP Rating | IP-20 / IP-65 |
| Beam Angle | 120° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | Yes |
| Product Finish | N.A. |
| Reflector | N.A. |











# Strip Drivers

| Model | Dimension(mm) |
|---|---|
| 24W/12V LED DRIVER NON DIM | 76x40x29(H) |
| 60W/24V/2.5A STRIP DRIVER NON DIM (CV) | 170x35x23(H) |
| I00 W/24V/4A STRIP DRIVER NON DIM (CV) | 145x48x24(H) |
| 150W/24V/6.25A STRIP DRIVER NON DIM (CV) | 195x48x24(H) |
| 200W/24V/8A STRIP DRIVER NON DIM (CV) | 215x48x24(H) |
| 250W/24V/10A (W/O FAN) STRIP DRIVER NON DIM (CV) | 236x49x29(H) |
| 300W/24V/12.5A (W/O FAN) STRIP DRIVER NON DIM (CV) | 236x49x29(H) |
| 400W/24V/17A CH STRIP DRIVER NON DIM | 236X49X29(H) |
| 500W/24V/20.83A CH STRIP DRIVER NON DIM | 213X62X31(H) |
| 60W/24V/2.5A STRIP DRIVER 3 IN 1 DIMMABLE (CV) | 145x48x29(H) |
| IOOW/24V/4A STRIP DRIVER 3 IN 1 DIMMABLE (CV) | 160x48x29(H) |
| 150W/24V6.25A STRIP DRIVER 3 IN 1 DIMMABLE (CV) | 180x64x29(H) |
| 200W/24V/8A STRIP DRIVER 3 IN 1 DIMMABLE (CV) | 205x64x29(H) |

## Features

1. Soft on/off
2. Light dimming options

# 24V LED STRIP DRIVER

### Stable, Regulated Output

Constant and clean 24V DC output Low ripple(<5%) to protect LED strips from flicker and premature failure

### High Efficiency


Efficiency typically >85% to 92%, reduces heat & electricity consumption

### Dimming Compatibility

Supports PWM, 0-10V, DALI, Triac/ Phase-cut, or DMX dimming for Linear Lights

### Sufficient Power Cap.

Choose drivers with 20-30% extra wattage headroom for a 100W LED load use a 120-180W driver

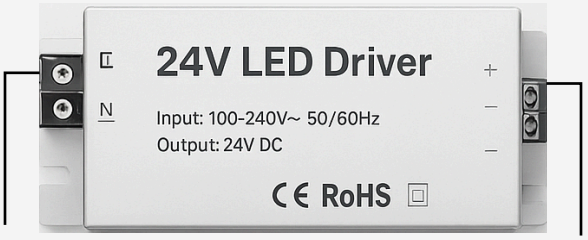


### Proper Thermal Design

Efficient head dissipation aluminum housing or an athermal management for longevity

### Wide Input Voltage Range

Typically 100-240V AC handle voltage fluctuations easy wiring to manue

### Low Lifespan & Reliability

Lifespan 30.000-900+ hours high-quality capacitors (erten Japaness) low thermal stress design

### Certifications & Safety Standards

CE / RoHS / UL / BIS (India) ensures safety and compliance for professional installations



## 8X9 Trimless Profile

| Product Properties | |
|---|---|
| Installation | Surface |
| Light Source | 5mm Led Strip |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 8(W)x9(H) |
| Available Length | 2m, 3m |



## 8X9 Trim / Collar Profile

| Product Properties | |
|---|---|
| Installation | Recess |
| Light Source | 5mm Led Strip |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 8(Cut Out)x9(H) |
| Available Length | 2m, 3m |



## 16X6 Trimless Profile

| Product Properties | |
|---|---|
| Installation | Surface |
| Light Source | 10mm Led Strip |
| No. of LEDs | 240 Led for Dot less |
| Dimension (mm) | 16(W)x6(H) |
| Available Length | 3m |



## 16X6 Trim / Collar Profile

| Product Properties | |
|---|---|
| Installation | Recess |
| Light Source | 10mm Led Strip |
| No. of LEDs | 240 Led for Dot less |
| Dimension (mm) | 16(Cut Out)x6(H) |
| Available Length | 3m |



## 17X6 Trimless Profile

| Product Properties | |
|---|---|
| Installation | Surface |
| Light Source | 10mm Led Strip |
| No. of LEDs | 240 Led for Dot less |
| Dimension (mm) | 17(W)x6(H) |
| Available Length | 2m, 3m |



## 17X6 Trim / Collar Profile

| Product Properties | |
|---|---|
| Installation | Recess |
| Light Source | 10mm Led Strip |
| No. of LEDs | 240 Led for Dot less |
| Dimension (mm) | 17(Cut Out)x6(H) |
| Available Length | 2m, 3m |



## 17X14 Trimless Profile

| Product Properties | |
|---|---|
| Installation | Surface |
| Light Source | 10mm Led Strip |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 17(W)x14(H) |
| Available Length | 2m, 3m |



## 17X14 Trim / Collar Profile

| Product Properties | |
|---|---|
| Installation | Recess |
| Light Source | 10mm Led Strip |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 17(Cut Out)x14(H) |
| Available Length | 2m, 3m |



## 25X25 Trimless Profile

| Product Properties | |
|---|---|
| Installation | Surface |
| Light Source | 10mm Led Strip x 2 Rows |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 25(W)x25(H) |
| Available Length | 3m |



## 25X25 Trim / Collar Profile

| Product Properties | |
|---|---|
| Installation | Recess |
| Light Source | 10mm Led Strip x 2 Rows |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 25(Cut Out)x25(H) |
| Available Length | 2m, 3m |



## 35X35 Trimless Profile

| Product Properties | |
|---|---|
| Installation | Surface |
| Light Source | 10mm LED Strip x 2 Rows |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 35(W)x35(H) |
| Available Length | 3m |




## 35X35 Trim / Collar Profile

| Product Properties | |
|---|---|
| Installation | Recess |
| Light Source | 10mm Led Strip x 2 Rows |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 35(Cut Out)x35(H) |
| Available Length | 2m, 3m |



## 50X35 Trimless Profile

| Product Properties | |
|---|---|
| Installation | Surface |
| Light Source | 10mm Led Strip x 3 Rows |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 50(W)x35(H) |
| Available Length | 3m |



## 50X35 Trim / Collar Profile

| Product Properties | |
|---|---|
| Installation | Recess |
| Light Source | 10mm Led Strip x 3 Rows |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 50(Cut Out)x35(H) |
| Available Length | 2m, 3m |



## 10X10 Trimless Profile

| Product Properties | |
|---|---|
| Installation | Surface |
| Light Source | 5mm Led Strip |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 10(W)x10(H) |
| Available Length | 3m |



## 20X10 Trimless Profile

| Product Properties | |
|---|---|
| Installation | Surface |
| Light Source | 8mm Led Strip x 2 Rows |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 20(W)X10(H) |
| Available Length | 3m |



## 30X10 Trimless Profile

| Product Properties | |
|---|---|
| Installation | Surface |
| Light Source | 8mm Led Strip x 3 Rows |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 30(W)x10(H) |
| Available Length | 3m |



## 8X8 Round Diff Corner 45°L Profile

| Product Properties | |
|---|---|
| Installation | Surface |
| Light Source | 5mm Led Strip |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 8(W)x8(H) |
| Available Length | 3m |



## 16X16 Round Diff Corner 45°L Profile

| Product Properties | |
|---|---|
| Installation | Surface |
| Light Source | 8mm Led Strip |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 16(W)x16(H) |
| Available Length | 2m, 3m |




## 16X16 Square Diff Corner 45°L Profile

| Product Properties | |
|---|---|
| Installation | Surface |
| Light Source | 8mm Led Strip |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 16(W)x16(H) |
| Available Length | 2m, 3m |



## 50X70 Aluminium Length Hanging /Surface

| Product Properties | |
|---|---|
| Installation | Surface |
| Light Source | 10mm led strip x 3 rows/ AL PCB with 4 rows |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 50(W)x70(H) |
| Available Length | 3m, 3.6m |



## 50X70 Black Length Hanging/Surface

| Product Properties | |
|---|---|
| Installation | Surface |
| Light Source | 10mm led strip x 3 rows/ AL PCB with 4 rows |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 50(W)x70(H) |
| Available Length | 3m, 3.6m |



## PXG512 Wardrobe Profile

| Product Properties | |
|---|---|
| Installation | Recess |
| Light Source | 5mm Led Strip |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 21(W)x9(H) |
| Available Length | 2m, 3m |



## PXG30 Round Profile

| Product Properties | |
|---|---|
| Installation | Hanging |
| Light Source | 5mm Led Strip x 2 Rows |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 30(Dia) |
| Available Length | 3m |




## PXG60 Round Profile

| Product Properties | |
|---|---|
| Installation | Hanging |
| Light Source | 10mm Led Strip x 2 Rows |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 60(Dia) |
| Available Length | 3m |



## 35X68 Hanging/Surface

| Product Properties | |
|---|---|
| Installation | Surface |
| Light Source | 10mm Led Strip x 2 Rows / PCB |
| No. of LEDs | 120 Led for Dot less |
| Dimension (mm) | 35(W)x68(H) |
| Available Length | 3m, 3.6m |

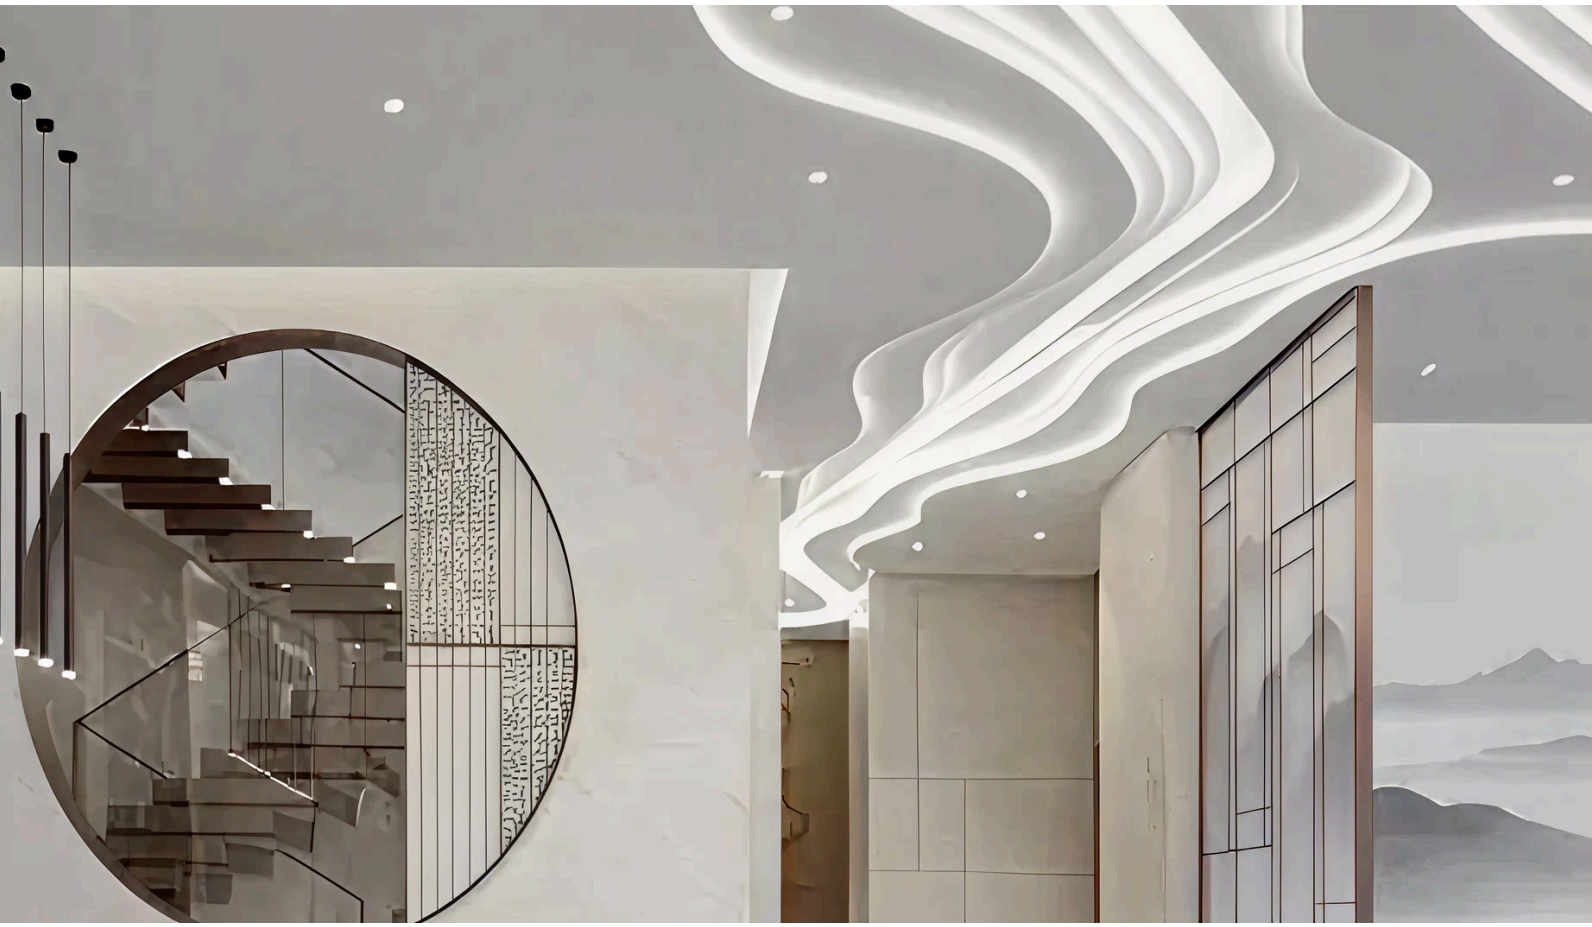



OUTDOOR SYSTEMS







# Blaze Flood Light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| Blaze Flood Light | 30W | 214(L)x160(W)x42(H) | N.A. |
| Blaze Flood Light | 50W | 230(L)x197(W)x50(H) | N.A. |
| Blaze Flood Light | 100W | 290(L)x243(W)x53(H) | N.A. |
| Blaze Flood Light | 150W | 352(L)x285(W)x70(H) | N.A. |
| Blaze Flood Light | 200W | 430(L)x325(W)x80(H) | N.A. |

## Product Properties

| | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k, 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 120° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | White |



OUTDOOR SYSTEMS

# Flare Hibay





| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| Flare Hibay | 50W | Dia 270x200(H) | N.A. |
| Flare Hibay | 100W | Dia 270x200(H) | N.A. |
| Flare Hibay | 150W | Dia 270x240(H) | N.A. |
| Flare Hibay | 200W | Dia 270x275(H) | N.A. |




| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 6500k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 80° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | White |









## 8080 Footlight


| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 8080 SF- Footlight | 4W | 90(W)x60(H) | N.A. |
| 8080 SF- Footlight | 8W | 150(W)x70(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 120° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |












## 990 Footlight

| Model | W | Shape | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|---|
| 990 SF RD | 4W | Round | Dia 115 | N.A. |
| 990 SF SQ | 4W | Square | 105(W)x105(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 120° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |








## 9306 5X3 Footlight

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 9306 5x3 Footlight | 6W | 135(L)x75(W)x80(H) | 126(L)x75(W)x70(H) |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |










## 8401 Footlight

| Model | W | Shape | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|---|
| 8401 Footlight RD | 3W | Round | Dia 95x60(H) | Dia 60x90 |
| 8401 Footlight SQ | 3W | Square | 95(L)x60(W)x95(H) | Dia 60x90 |

| Product Properties | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 10° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |







## 33 Footlight

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 33 Footlight | 3W | 84(L)x45(W)x84(H) | 80x80x45 |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |






## 9081 Footlight

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 9081 Footlight | 3W | 48(W)x210(H) | 185x36x45 |


| Product Properties | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 5° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |



OUTDOOR SYSTEMS




26A







26B






26C





# 26 Footlight


| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 26A Footlight | 3W | Dia 60x55(H) | Dia50x55 |
| 26B Footlight | 3W | Dia 60x55(H) | Dia50x55 |
| 26C Footlight | 3W | Dia 60x55(H) | Dia50x55 |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | White |
| Reflector | N.A. |









## 25 Footlight

| Model | W | Shape | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|---|
| 25 Footlight RD | 3W | Round | Dia 46x80(H) | N.A. |
| 25 Footlight SQ | 3W | Square | 46X46X80(H) | N.A. |

### Product Properties

| | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 24° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | White |
| Reflector | N.A. |






## 8090 Ring Footlight

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 8090 Ring Footlight | 3W | Dia 50x70(H) | Dia47x70 |

### Product Properties

| | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | White |
| Reflector | N.A. |






# 2007- Uplight / UpdownLight

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 2007 -1 Uplight | 12W | 102(W)x116(H) | N.A. |
| 2007 -2 Updownlight | 2x12W | 102(W)x220(H) | N.A. |

## Product Properties

| | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |



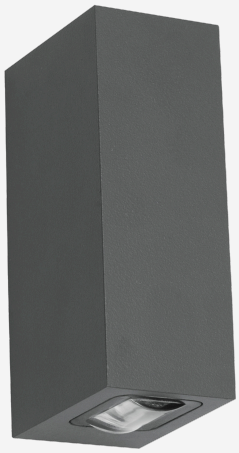

## 4002 Square Lens

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 4002 Sq Lens Up Light | 1x3W | 60(L)x43(W)x120(H) | N.A. |
| 4002 Sq Lens Up Down Light | 2x3W | 60(L)x43(W)x120(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 10° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |



## 4002 Round & Square Lens

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 4002 Rd+Sq Lens UpDownLight | 2x3W | 60(L)x43(W)x120(H) | N.A. |


| Product Properties | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | SQ Lens(10°) RD Lens(60°) |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |




## 4002 Round Lens

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 4002 Rd Lens Up Light | 1x3W | Dia 60x43x120(H) | N.A. |
| 4002 Rd Lens Up Down Light | 2x3W | Dia 60x43x120(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 60° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |

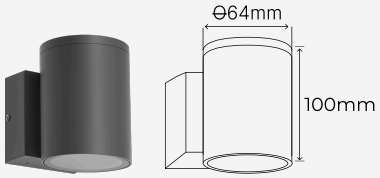

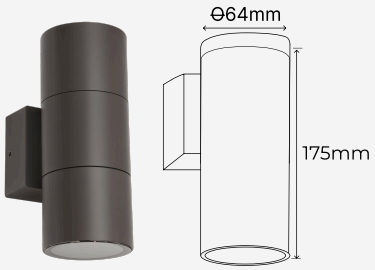




## 881 Round

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 881-1 RD Up Light | 4.5W | Dia 64x100(H) | N.A. |
| 881-2 RD Updown Light | 2x4.5W | Dia 64x175(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Osram Lamp |
| Driver Brand | N.A. |
| Input Voltage | 240V / 50Hz |
| CCT | 2700k, 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 36° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | Triac (on Request) |
| Product Finish | Grey |
| Reflector | N.A. |







# 881 Square

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 881-1 SQ Uplight | 4.5W | 64(L)x64(W)x95(H) | N.A. |
| 881-2 SQ Updown light | 2x4.5W | 64(L)x64(W)x148(H) | N.A. |






## Product Properties

| | |
|---|---|
| LED | Osram Lamp |
| Driver Brand | N.A. |
| Input Voltage | 240V / 50Hz |
| CCT | 2700k, 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 36$^{o}$ |
| Swivel Angle | Fixed |
| Operating Temp | 0-50$^{o}$c |
| Dimmable | Triac / Analogue / Dali (on Request) |
| Product Finish | Grey |
| Reflector | N.A. |







## 8091 K Type

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 8091 K Type Up Light | 1x5W | 80(L)x65(W)x75(H) | N.A. |
| 8091 K Type Up Down Light | 2x5W | 80(L)x65(W)x140(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 120° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |




## 7020 4 Way


| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 7020 4 Way | 4x3W | 77(L)x77(W)x57(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 60° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |








# 234 Up Downlight

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 234 Up Downlight | 2x6W | 115(W)x90(H) | N.A. |
| 234 Up Downlight | 2x8W | 175(W)x90(H) | N.A. |

## Product Properties

| | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 120° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |





## 642-1 Light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 642-1 uplight | 1x1x3W | 80(W)x78(H) | N.A. |
| 642-1 updownlight | 2x1x3W | 80(W)x78(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 220V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 60° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |



## 642-2 Light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 642-2 uplight | 1x2x3W | 115(W)x78(H) | N.A. |
| 642-2 updownlight | 2x2x3W | 115(W)x78(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 220V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 60° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |




# 642-3 Light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 642-3 uplight | 1x3x3W | 170(W)x78(H) | N.A. |
| 642-3 updownlight | 2x3x3W | 170(W)x78(H) | N.A. |

## Product Properties

| | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 220V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 60° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |








# 1404 light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 1404 -1 Uplight | 6W | Dia 82x105(L)x90(H) | N.A. |
| 1404 -2 Updownlight | 6W | Dia 82x 105(L)x135(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |








# 9090 UpDownLight

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 9090 Up Down Light | 2x3W | 108(A)x54(B)x176(H) | N.A. |

## Product Properties

| | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Up-10$^{o}$ Down-Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50$^{o}$c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |







## 2004 Lens 4-Way

| Model | W | Shape | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|---|
| 2004 Lens SQ | 4x3W | Square | 98(L)x50(W)x98(H) | N.A. |
| 2004 Lens RD | 4x3W | Square | 98(L)x50(W)x98(H) | N.A. |

### Product Properties

| | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Round-60°, Square-10° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |





## 5100 Cap Spike light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 5100 Cap Spike Light | 7W | Dia 64x110 | N.A. |
| 5100 Cap Spike Light | 12W | Dia 85x110 | N.A. |

### Product Properties

| | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 36° |
| Swivel Angle | Tilt Up & Down |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |






## 5100 Cap Surface

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 5100 Cap Surface | 7W | Dia 64x110 | N.A. |
| 5100 Cap Surface | 12W | Dia 85x110 | N.A. |

| Product Properties | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 36° |
| Swivel Angle | Tilt Up & Down |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |



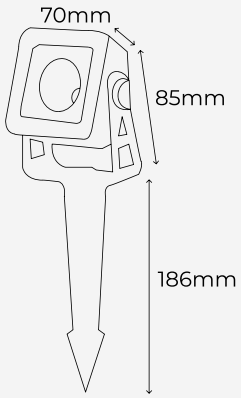



## 4040 Spike Light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 4040 Spike Light | 7W | 85(L)x70(W)x186(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 36° |
| Swivel Angle | Tilt Up & Down |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |






## 4095 Cap Spike Light GU-10

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 4095 Cap Spike Light GU-10 | 4.5W | Dia 60x113 | N.A. |

| Product Properties | |
|---|---|
| LED | Osram Lamp |
| Driver Brand | N.A. |
| Input Voltage | 240V / 50Hz |
| CCT | 2700k,3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 36° |
| Swivel Angle | Tilt Up & Down |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Black |
| Reflector | N.A. |






## 4095 Cap Surface Light GU-10

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 4905 Cap Surface Light GU-10 | 4.5W | Dia 60x113 | N.A. |

| Product Properties | |
|---|---|
| LED | Osram Lamp |
| Driver Brand | N.A. |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 36° |
| Swivel Angle | Tilt Up & Down |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Black |
| Reflector | N.A. |









# 4050 Burial

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 4050 1 Way Burial | 1x3W | Dia 85x94(H) | Dia 69x70(H) |
| 4050 2 Way Burial | 2x3W | Dia 85x94(H) | Dia 69x70(H) |
| 4050 3 Way Burial | 3x1W | Dia 85x94(H) | Dia 69x70(H) |
| 4050 4 Way Burial | 4x1W | Dia 85x94(H) | Dia 69x70(H) |

| Product Properties | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | N.A. |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |








# Trick light AMS

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 180 Trick Light AMS | 6W | 153(L)x96(H) | N.A. |
| 360 Trick Light AMS | 9W | Dia 118x165(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 180°, 360° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |









## 7080 Wall Light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 7080 Wall Light | 12W | Dia 180x45(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 360° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |







## 7080 Bollard

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 7080 10” Bollard | 12W | Dia 180X255(H) | N.A. |
| 7080 20” Bollard | 12W | Dia 180X510(H) | N.A. |
| 7080 30” Bollard | 12W | Dia 180X760(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 360° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |



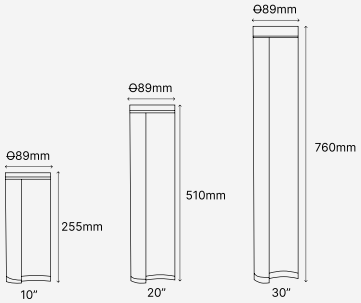



# 4041 Bollard

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 4041 10" Bollard | 5W | Dia 89x255(H) | N.A. |
| 4041 20" Bollard | 5W | Dia 89x510(H) | N.A. |
| 4041 30" Bollard | 5W | Dia 89x760(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 36° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |



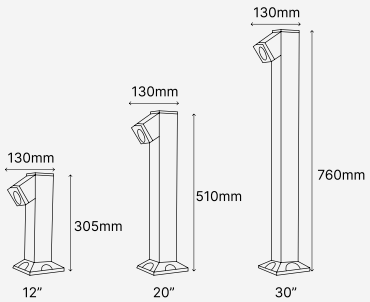



# 3688 Bollard

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 3688 12" Bollard | 1x5W | 130(L)x305(H) | N.A. |
| 3688 20" Bollard | 1x5W | 130(L)x510(H) | N.A. |
| 3688 30" Bollard | 1x5W | 130(L)x760(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 24° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |







# 1224 Bollard

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 1224 15” Bollard | 12W | Dia 190x380(H) | N.A. |
| 1224 27” Bollard | 12W | Dia 190x686(h) | N.A. |
| 1224 39” Bollard | 12W | Dia 190x 990(h) | N.A. |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 360° |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |



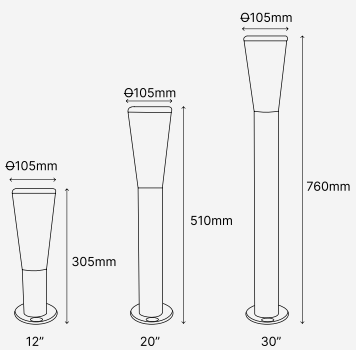



# 888 Bollard

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 888 12” Bollard | 12W | Dia 105x305(H) | N.A. |
| 888 20” Bollard | 12W | Dia 105x510(H) | N.A. |
| 888 30” Bollard | 12W | Dia 105x760(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Led Bulb |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |



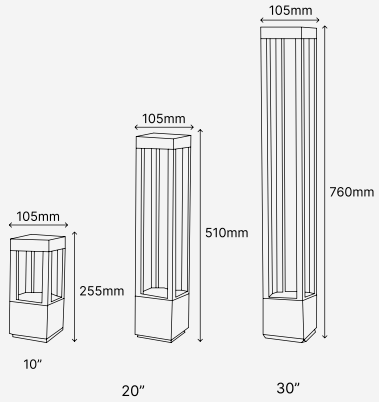


# 3500 Bollard


| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 3500 10" Bollard | 12W | 105(L)x105(W)x255(H) | N.A. |
| 3500 20" Bollard | 12W | 105(L)x105(W)x510(H) | N.A. |
| 3500 30" Bollard | 12W | 105(L)x105(W)x750(H) | N.A. |

## Product Properties

| | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood (4 Way) |
| Swivel Angle | Fixed |
| Operating Temp | 0-50$^{o}$c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |









# 7711 Bollard

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 7711 10" Bollard | 12W | Dia 128x255(H) | N.A. |
| 7711 20" Bollard | 12W | Dia 128x510(H) | N.A. |
| 7711 30" Bollard | 12W | Dia 128x760(H) | N.A. |

## Product Properties

| | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood (4 Way) |
| Swivel Angle | Fixed |
| Operating Temp | 0-50$^{o}$c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |







# 303 Bollard

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 303 10" Bollard 3 Way | 12W | 130(W)x255(H) | N.A. |
| 303 20" Bollard 3 Way | 12W | 130(W)x510(H) | N.A. |
| 303 30" Bollard 3 Way | 12W | 130(W)x760(H) | N.A. |

## Product Properties

| | |
|---|---|
| LED | Cree |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood (3 Way) |
| Swivel Angle | Fixed |
| Operating Temp | 0-50$^{o}$c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |







## 202 Bollard

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 202 10" Bollard 2 Way | 12W | 177(W)x255(H) | N.A. |
| 202 20" Bollard 2 Way | 12W | 177(W)x510(H) | N.A. |
| 202 30" Bollard 2 Way | 12W | 177(W)x760(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood (2 Way) |
| Swivel Angle | Fixed |
| Operating Temp | 0-50$^{o}$c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |






## 404 Bollard

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 404 12" Bollard | 12W | Dia 100x305(H) | N.A. |
| 404 20" Bollard | 12W | Dia 100x510(H) | N.A. |
| 404 30" Bollard | 12W | Dia 100x760(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | 360$^{o}$ |
| Swivel Angle | Fixed |
| Operating Temp | 0-50$^{o}$c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |







## 999 Gate Light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 999 Small Gate Light | B-22 | Dia 50x195(W)x350(H) | N.A. |
| 999 Medium Gate Light | B-22 | Dia 60x220(W)x385(H) | N.A. |
| 999 Big Gate Light | B-22 | Dia 75x265(W)x500(H) | N.A. |

| Product Properties | |
|---|---|
| LED | B-22 Led Bulb |
| Driver Brand | N.A. |
| Input Voltage | 220V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Black |
| Reflector | N.A. |







## 999 Wall Light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 999 Small Wall Light | B-22 | 195(W)x350(H) | N.A. |
| 999 Medium Wall Light | B-22 | 220(W)x385(H) | N.A. |
| 999 Big Wall Light | B-22 | 265(W)x500(H) | N.A. |

| Product Properties | |
|---|---|
| LED | B-22 Led Bulb |
| Driver Brand | N.A. |
| Input Voltage | 220V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Black |
| Reflector | N.A. |





## 201 Gate Light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 201 Small Gate Light | B-22 | Dia 60x205(W)x400(H) | N.A. |
| 201 Big Gate Light | B-22 | Dia 75x295(W)x520(H) | N.A. |

| Product Properties | |
|---|---|
| LED | B-22 Led Bulb |
| Driver Brand | N.A. |
| Input Voltage | 220V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50$^{o}$c |
| Dimmable | N.A. |
| Product Finish | Black |
| Reflector | N.A. |





## 201 Wall Light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 201 Small Wall Light | B-22 | 205(W)x390(W) | N.A. |
| 201 Big Wall Light | B-22 | 295(W)x510(W) | N.A. |

| Product Properties | |
|---|---|
| LED | B-22 Led Bulb |
| Driver Brand | N.A. |
| Input Voltage | 220V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50$^{o}$c |
| Dimmable | N.A. |
| Product Finish | Black |
| Reflector | N.A. |







## 501 Gate Light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 501 Small Gate Light | B-22 | 210(W)x320(H) | N.A. |
| 501 Medium Gate Light | B-22 | 260(W)x440(H) | N.A. |
| 501 Big Gate Light | B-22 | 320(W)x675(H) | N.A. |

| Product Properties | |
|---|---|
| LED | B-22 Led Bulb |
| Driver Brand | N.A. |
| Input Voltage | 220V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Black |
| Reflector | N.A. |







## 501 Wall Light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 501 Small Wall Light | B-22 | 210(W)x320(H) | N.A. |
| 501 Medium Wall Light | B-22 | 260(W)x395(H) | N.A. |
| 501 Big Wall Light | B-22 | 320(W)x580(H) | N.A. |

| Product Properties | |
|---|---|
| LED | B-22 Led Bulb |
| Driver Brand | N.A. |
| Input Voltage | 220V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50°c |
| Dimmable | N.A. |
| Product Finish | Black |
| Reflector | N.A. |





## 444 Gate light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 444 Small Gate Light | B-22 | Dia 50x140(W)x230(H) | N.A. |
| 444 Big Gate Light | B-22 | Dia 60x180(W)x390(H) | N.A. |

| Product Properties | |
|---|---|
| LED | B-22 Led Bulb |
| Driver Brand | N.A. |
| Input Voltage | 220V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50$^{o}$c |
| Dimmable | N.A. |
| Product Finish | Black |
| Reflector | N.A. |








## 444 Wall Light


| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 444 Small Wall Light | B-22 | 140(W)x240(H) | N.A. |
| 444 Big Wall Light | B-22 | 180(W)x380(H) | N.A. |

| Product Properties | |
|---|---|
| LED | B-22 Led Bulb |
| Driver Brand | N.A. |
| Input Voltage | 220V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50$^{o}$c |
| Dimmable | N.A. |
| Product Finish | Black |
| Reflector | N.A. |













## 8802 Gate Light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 8802 Gatelight 6”x6” | E27 | 150(L)x150(W)x152.4(H) | N.A. |
| 8802 Gatelight 10”x10” | E27 | 254(L)x254(W)x254(H) | N.A. |

| Product Properties | |
|---|---|
| LED | E27 Led Bulb |
| Driver Brand | N.A |
| Input Voltage | 240V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50$^{o}$c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |






## 8910 Wall light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| 8910 Wall light | 12W | 160(W)x85(H) | N.A. |

| Product Properties | |
|---|---|
| LED | Edison |
| Driver Brand | Qulite |
| Input Voltage | 220V / 50Hz |
| CCT | 3000k |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-65 |
| Beam Angle | Flood |
| Swivel Angle | Fixed |
| Operating Temp | 0-50$^{o}$c |
| Dimmable | N.A. |
| Product Finish | Grey |
| Reflector | N.A. |







# Storm Street Light

| Model | W | Dimension (mm) | Cut Out(mm) |
|---|---|---|---|
| Storm Street Light | 18W | 246(L)x95(W)x55(H) | N.A. |
| Storm Street Light | 24W | 246(L)x95(W)x55(H) | N.A. |
| Storm Street Light | 30W | 284(L)x116(W)x55(H) | N.A. |
| Storm Street Light | 35W | 284(L)x116(W)x55(H) | N.A. |
| Storm Street Light | 36W | 284(L)x116(W)x55(H) | N.A. |
| Storm Street Light | 40W | 350(L)x141(W)x60(H) | N.A. |
| Storm Street Light | 45W | 350(L)x141(W)x60(H) | N.A. |
| Storm Street Light | 48W | 350(L)x141(W)x60(H) | N.A. |
| Storm Street Light | 60W | 350(L)x141(W)x60(H) | N.A. |
| Storm Street Light | 65W | 350(L)x141(W)x60(H) | N.A. |
| Storm Street Light | 70W | 390(L)x165(W)x60(H) | N.A. |
| Storm Street Light | 72W | 350(L)x165(W)x60(H) | N.A. |
| Storm Street Light | 90W | 350(L)x165(W)x60(H) | N.A. |
| Storm Street Light | 100W | 350(L)x165(W)x60(H) | N.A. |
| Storm Street Light | 110W | 350(L)x165(W)x60(H) | N.A. |
| Storm Street Light | 120W | 455(L)x190(W)x75(H) | N.A. |
| Storm Street Light | 140W | 455(L)x190(W)x75(H) | N.A. |
| Storm Street Light | 150W | 455(L)x190(W)x75(H) | N.A. |
| Storm Street Light | 180W | 575(L)x205(W)x85(H) | N.A. |
| Storm Street Light | 200W | 575(L)x205(W)x85(H) | N.A. |

## Product Properties

| | |
|---|---|
| LED | Edison / Nichia / Osram / Cree |
| Driver Brand | Qulite / Osram / Philips |
| Input Voltage | 90-280V |
| CCT | 2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K |
| Housing Material | Aluminium Die Cast |
| IP Rating | IP-66 |
| Beam Angle | 100° |
| Swivel Angle | Fixed |
| Operating Temp | -10-50°c |
| Dimmable | Non Dimmable |
| Product Finish | Grey |
| Reflector | N.A. |
| Pole Dia | 40MM, 43MM, 65MM |