

Scintilla

Series By Qulite



Purpose. Passion. Performance.

Holding ourselves to a higher standard

Scintilla series by qulite has created innovations that have set and reset the standard for living beautifully and living responsibly at home, at work and around the world




Raising Our Standards Raises The Standard For Everyone

At work, at home and around the world

20mm MAGNETIC SYSTEM


TRACK SURFACE

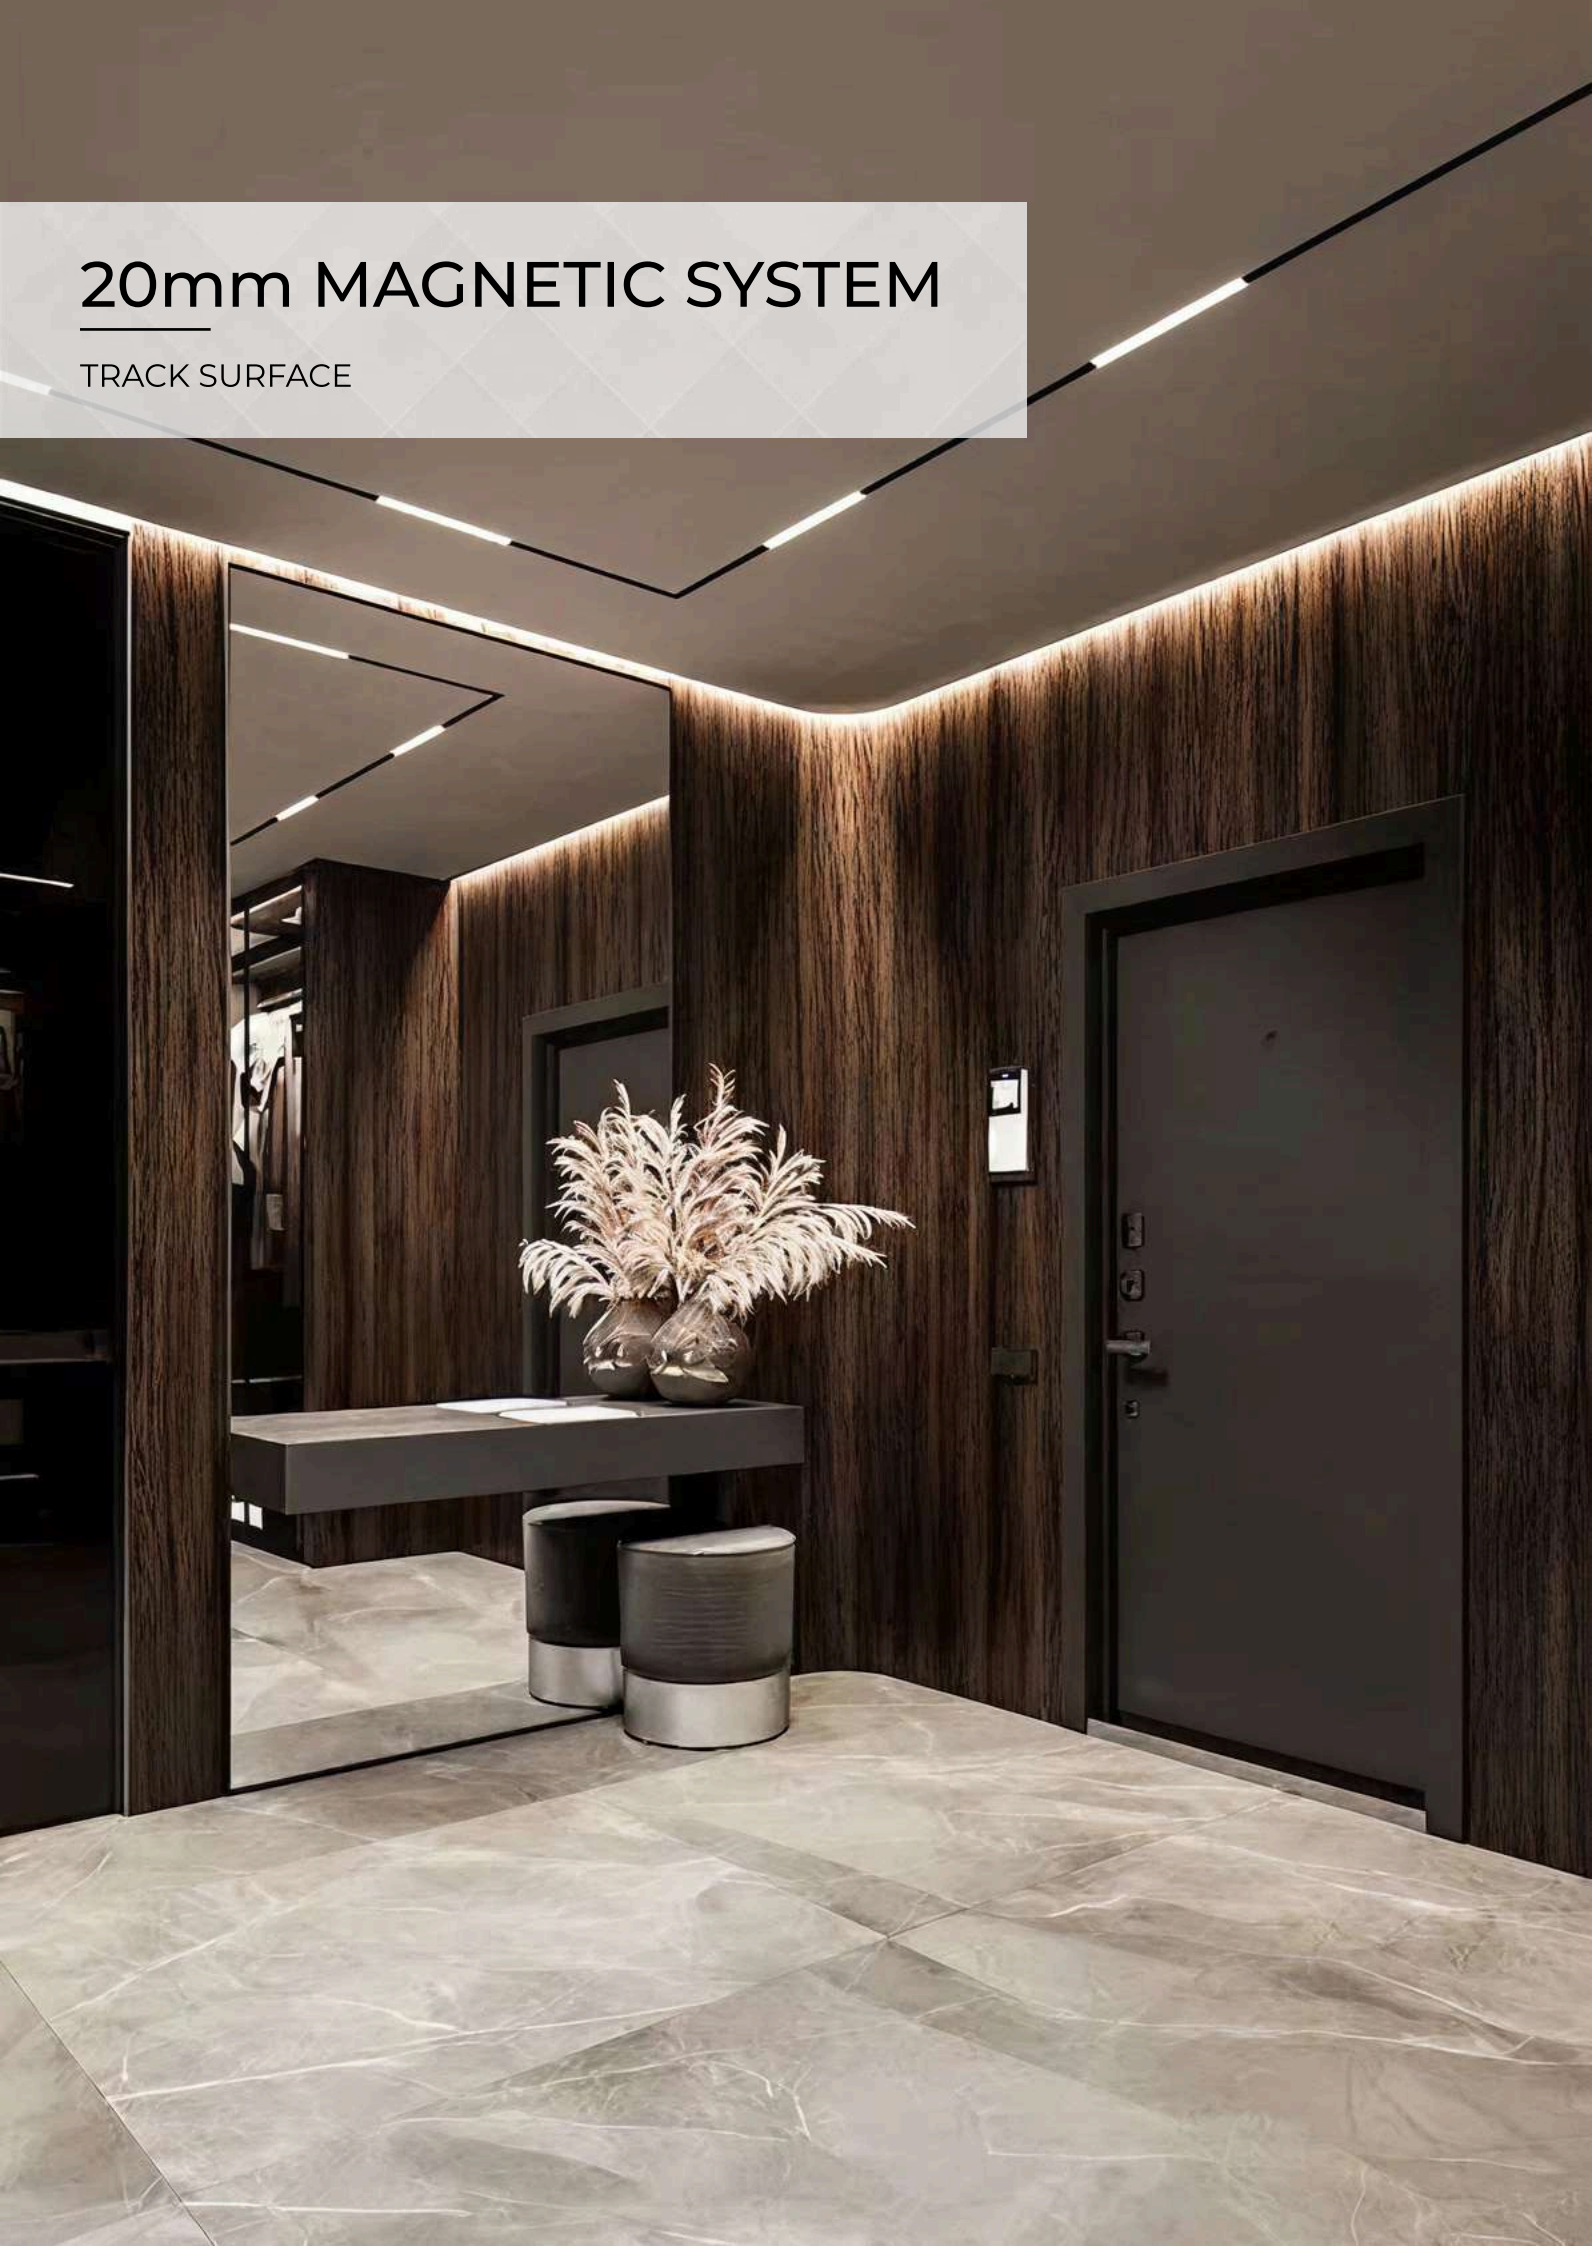


Create a modern and distinctive look with Scintilla Series Magnetic Track. With different lengths, functions and 3 different modules to choose from, you can create the right atmosphere in every part of the room or premises.

Our luminaires are tasteful and discreet, designed to complement your interior style in the most appealing way. No matter if you opt for linear lights, pendants or spotlight systems, we have a solution to suit your venue. Thanks to the efficient railed suspension design module, you can easily adjust the room lighting, without impacting the ceiling or wall.

TRACK SURFACE

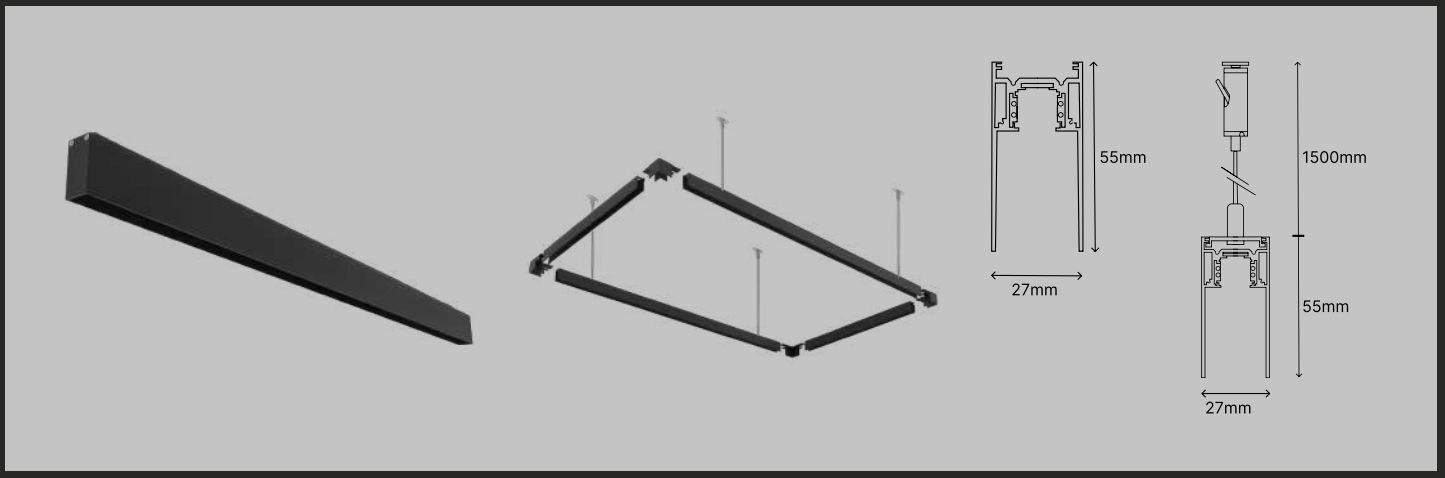

OUTER SIZE(mm) : 27(W)x55(H)x1mt(L) / x2mt(L) / x3mt(L)
Cutout Size : N.A.

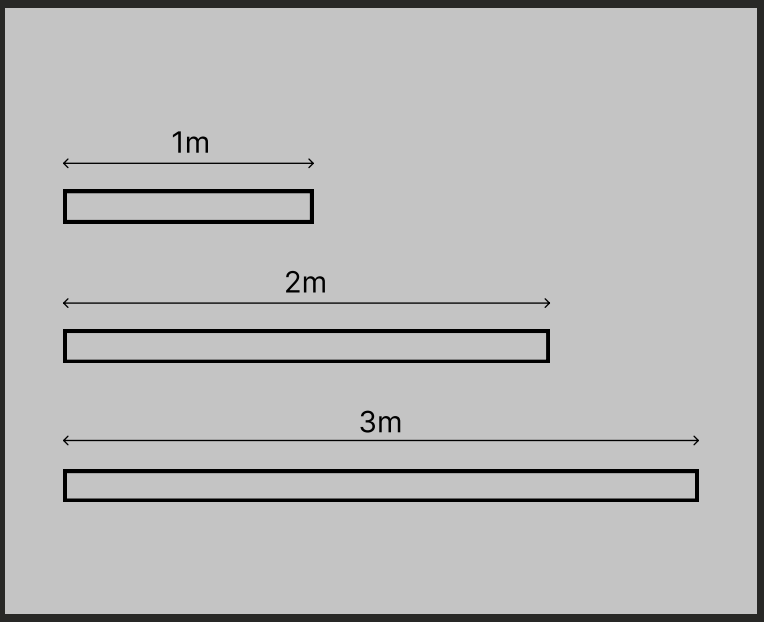

20MM MG SURFACE.1M.48V-INDOOR

Size(mm) : 1000(L)x27(W)X55(H)
Input : DC 48V
Material : Aluminium

20MM MG SURFACE.2M.48V-INDOOR


Size(mm) : 2000(L)x27(W)X55(H)
Input : DC 48V
Material : Aluminium

20MM MG SURFACE.3M.48V-INDOOR

Size(mm) : 3000(L)x27(W)X55(H)
Input : DC 48V
Material : Aluminium


20MM MAGNETIC SYSTEM


TRACK RECESSED

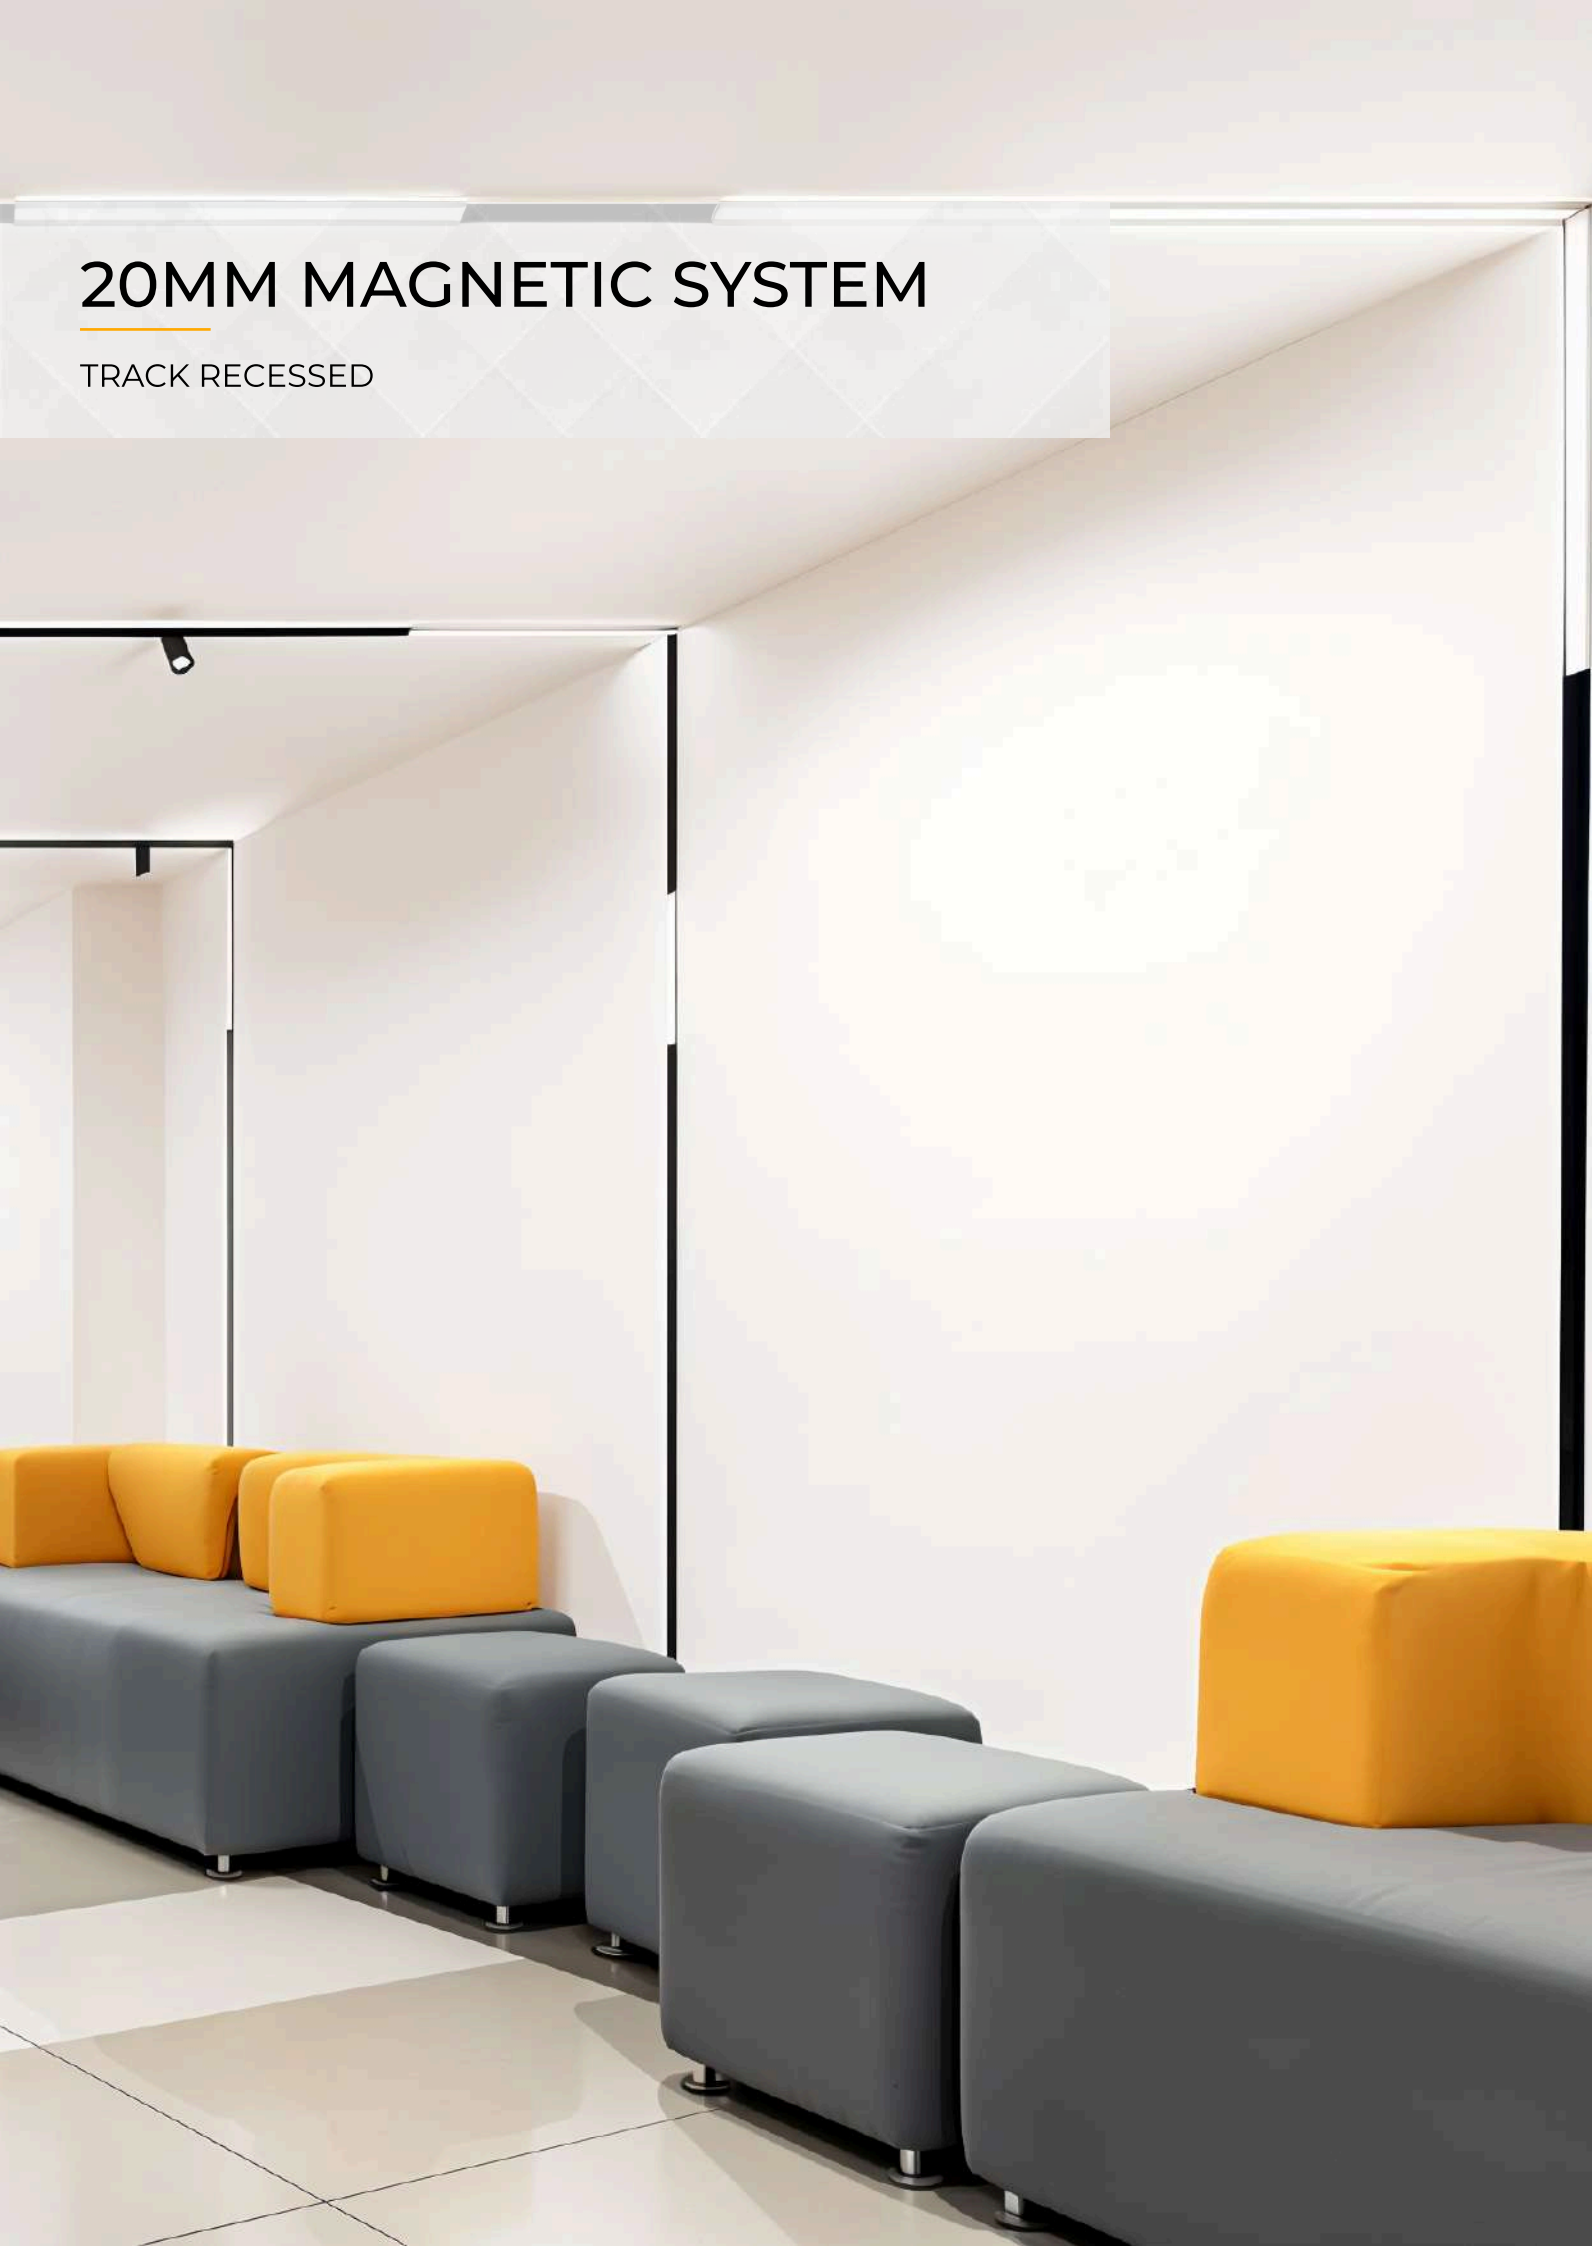


TRACK RECESSED







OUTER SIZE(mm) :67(W)x56(H)x1mt(L)x2mt(L)x3mt(L)
Cutout Size :35mm(W)

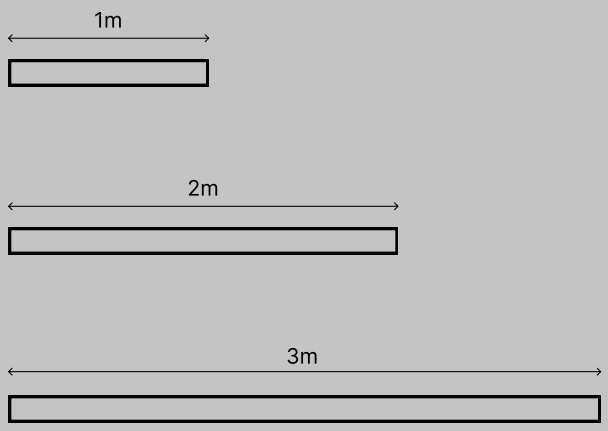

20MM MG TRACK RECESSED.1M.48V-INDOOR

Size(mm) : 1000(L)x35(W)X56(H)
Input : DC 48V
Material : Aluminium

20MM MG TRACK RECESSED.2M.48V-INDOOR

Size(mm) : 2000(L)x35(W)X56(H)
Input : DC 48V
Material : Aluminium


20MM MG TRACK RECESSED.3M.48V-INDOOR

Size(mm) : 3000(L)x35(W)X56(H)
Input : DC 48V
Material : Aluminium

CONNECTORS



Live end (+Corner Connector)



Wall to Wall Connector (In & Out)



Suspension Set (2mt)



End cap



Track Connection Plate




L- Joint° 90

LANKY SERIES


20MM MAGNETIC SYSTEM



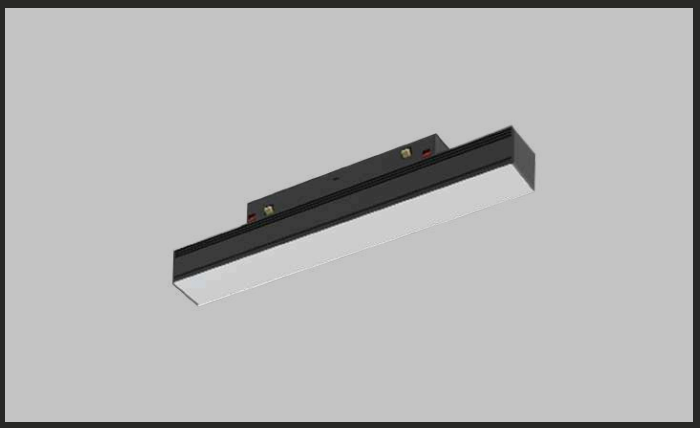


20MM MG LANKY.1.8.MB.MB.120.30027 .30G

Outer Size(mm) : 300(L)x27.5(W)x42.7(H)
Wattage : 8W

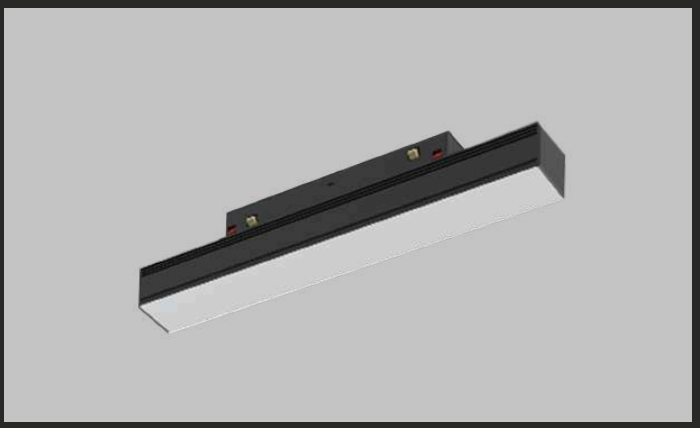


20MM MG LANKY.1.16.MB.MB.120.60027 .30G

Outer Size(mm) : 600(L)x27.5(W)x42.7(H)
Wattage : 16W

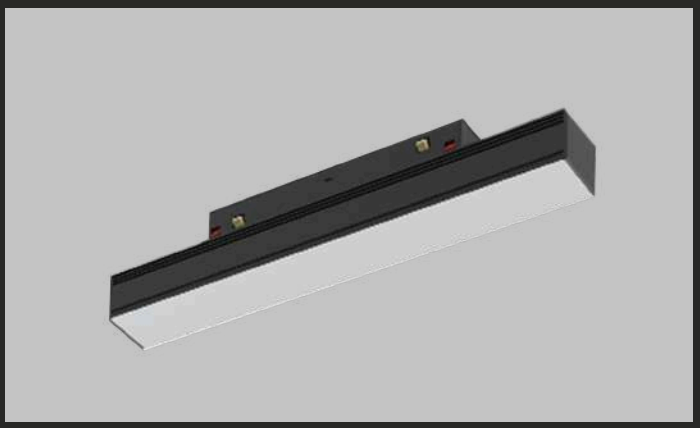

20MM MG LANKY.1.24.MB.MB.120.90027 .30G

Outer Size(mm) : 900(L)x27.5(W)x42.7(H)
Wattage : 24W

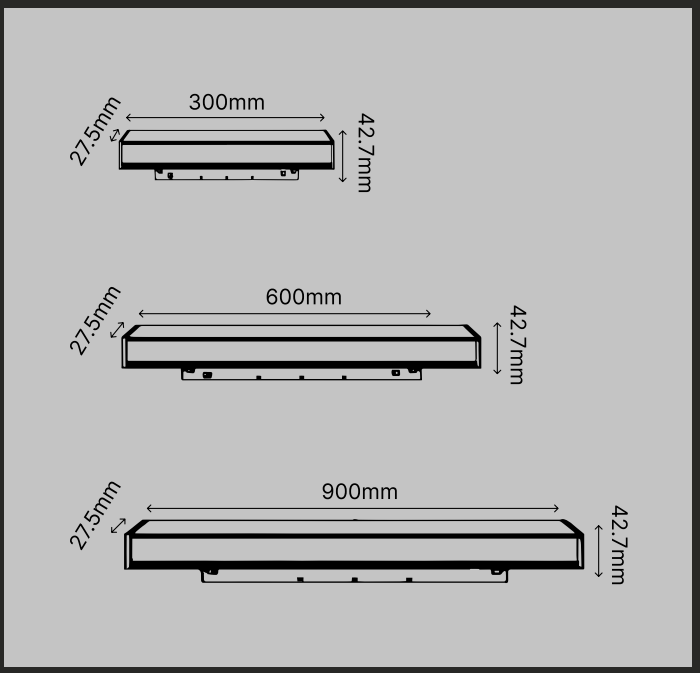

PRODUCT PROPERTIES


LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	DC 48V	CRI	>90
PRODUCT FINISH	Matt Black	SWIVEL/FIXED	Fixed
REFLECTOR FINISH	Diffuser	BEAM ANGLE	120°
IP RATING	IP 20	DIMMABLE	Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000k, 4000k

ANGLE SERIES

20MM MAGNETIC SYSTEM





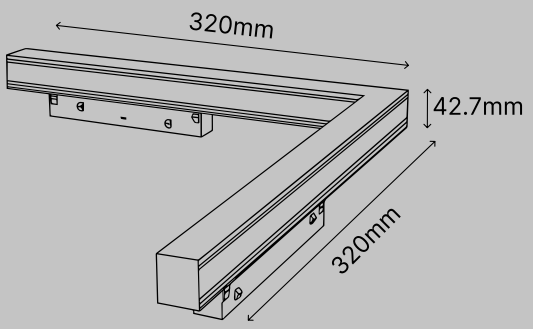

20MM MG ANGLE.1.16.MB.MB.120.320320.30G

Outer Size(mm) : 320(L)x320(W)x42.7(H)
Wattage : 16W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	DC 48V	CRI	>90
PRODUCT FINISH	Matt Black	SWIVEL/FIXED	Fixed
REFLECTOR FINISH	Diffuser	BEAM ANGLE	120°
IP RATING	IP 20	DIMMABLE	Analogue / Dali(on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000k, 4000k





SPECK SERIES

20MM MAGNETIC SYSTEM




SPECK.12.12.MB.MB.24.25027.30G


Outer Size(mm) : 250(L)x27(W)x42.7(H)
Wattage : 12W



SPECK.12.18.MB.MB.24.25027.30G

Outer Size(mm) : 370(L)x27.5(W)x42.7(H)
Wattage : 18W



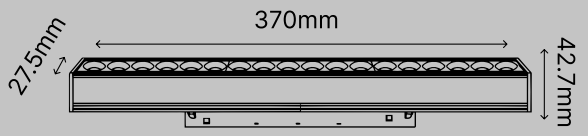

PRODUCT PROPERTIES


LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	DC 48V	CRI	>90
PRODUCT FINISH	Matt Black	SWIVEL/FIXED	Fixed
REFLECTOR FINISH	Matt Black	BEAM ANGLE	24°, 36°
IP RATING	IP 20	DIMMABLE	Analogue / Dali(on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000k, 4000k






SPECK ADJUST SERIES

20MM MAGNETIC SYSTEM

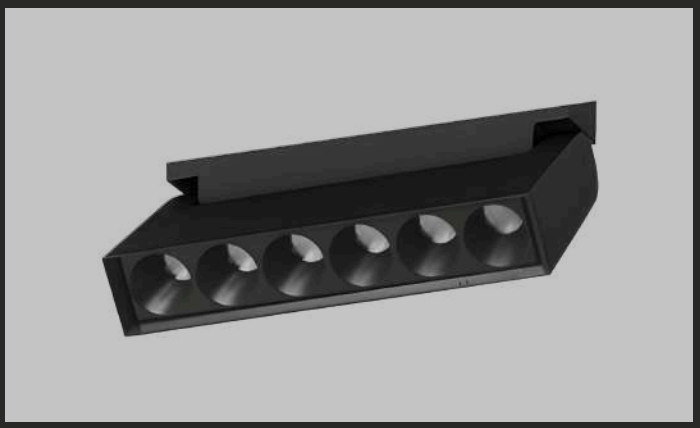


20MM MG SPECKADJ.6.10.MB.MB.24. 125140.30G


Outer Size(mm) : 125(L)x140(W)x25(H)
Wattage : 10W

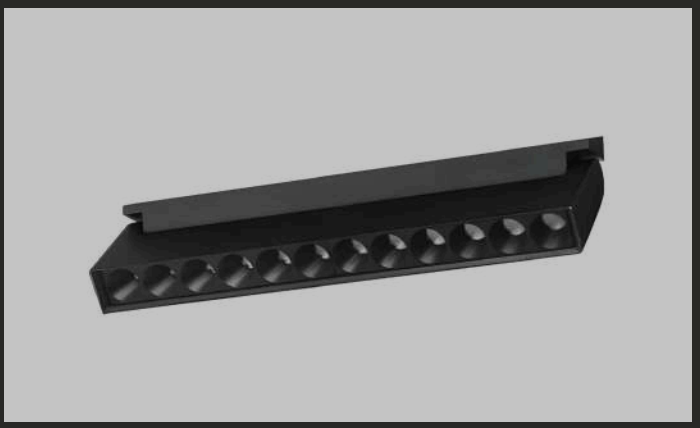

20MM MG SPECKADJ.12.20.MB.MB.24. 250140.30G

Outer Size(mm) : 250(L)x140(W)x25(H)
Wattage : 20W

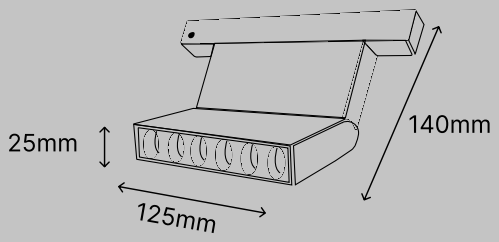


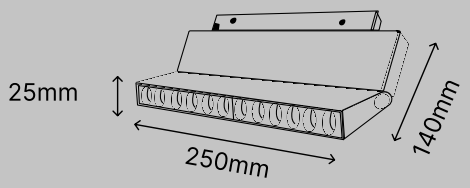

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	DC 48V	CRI	>90
PRODUCT FINISH	Matt Black	SWIVEL/FIXED	Swivel
REFLECTOR FINISH	Matt Black	BEAM ANGLE	24°, 36°
IP RATING	IP 20	DIMMABLE	Analogue / Dali(on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000k, 4000k



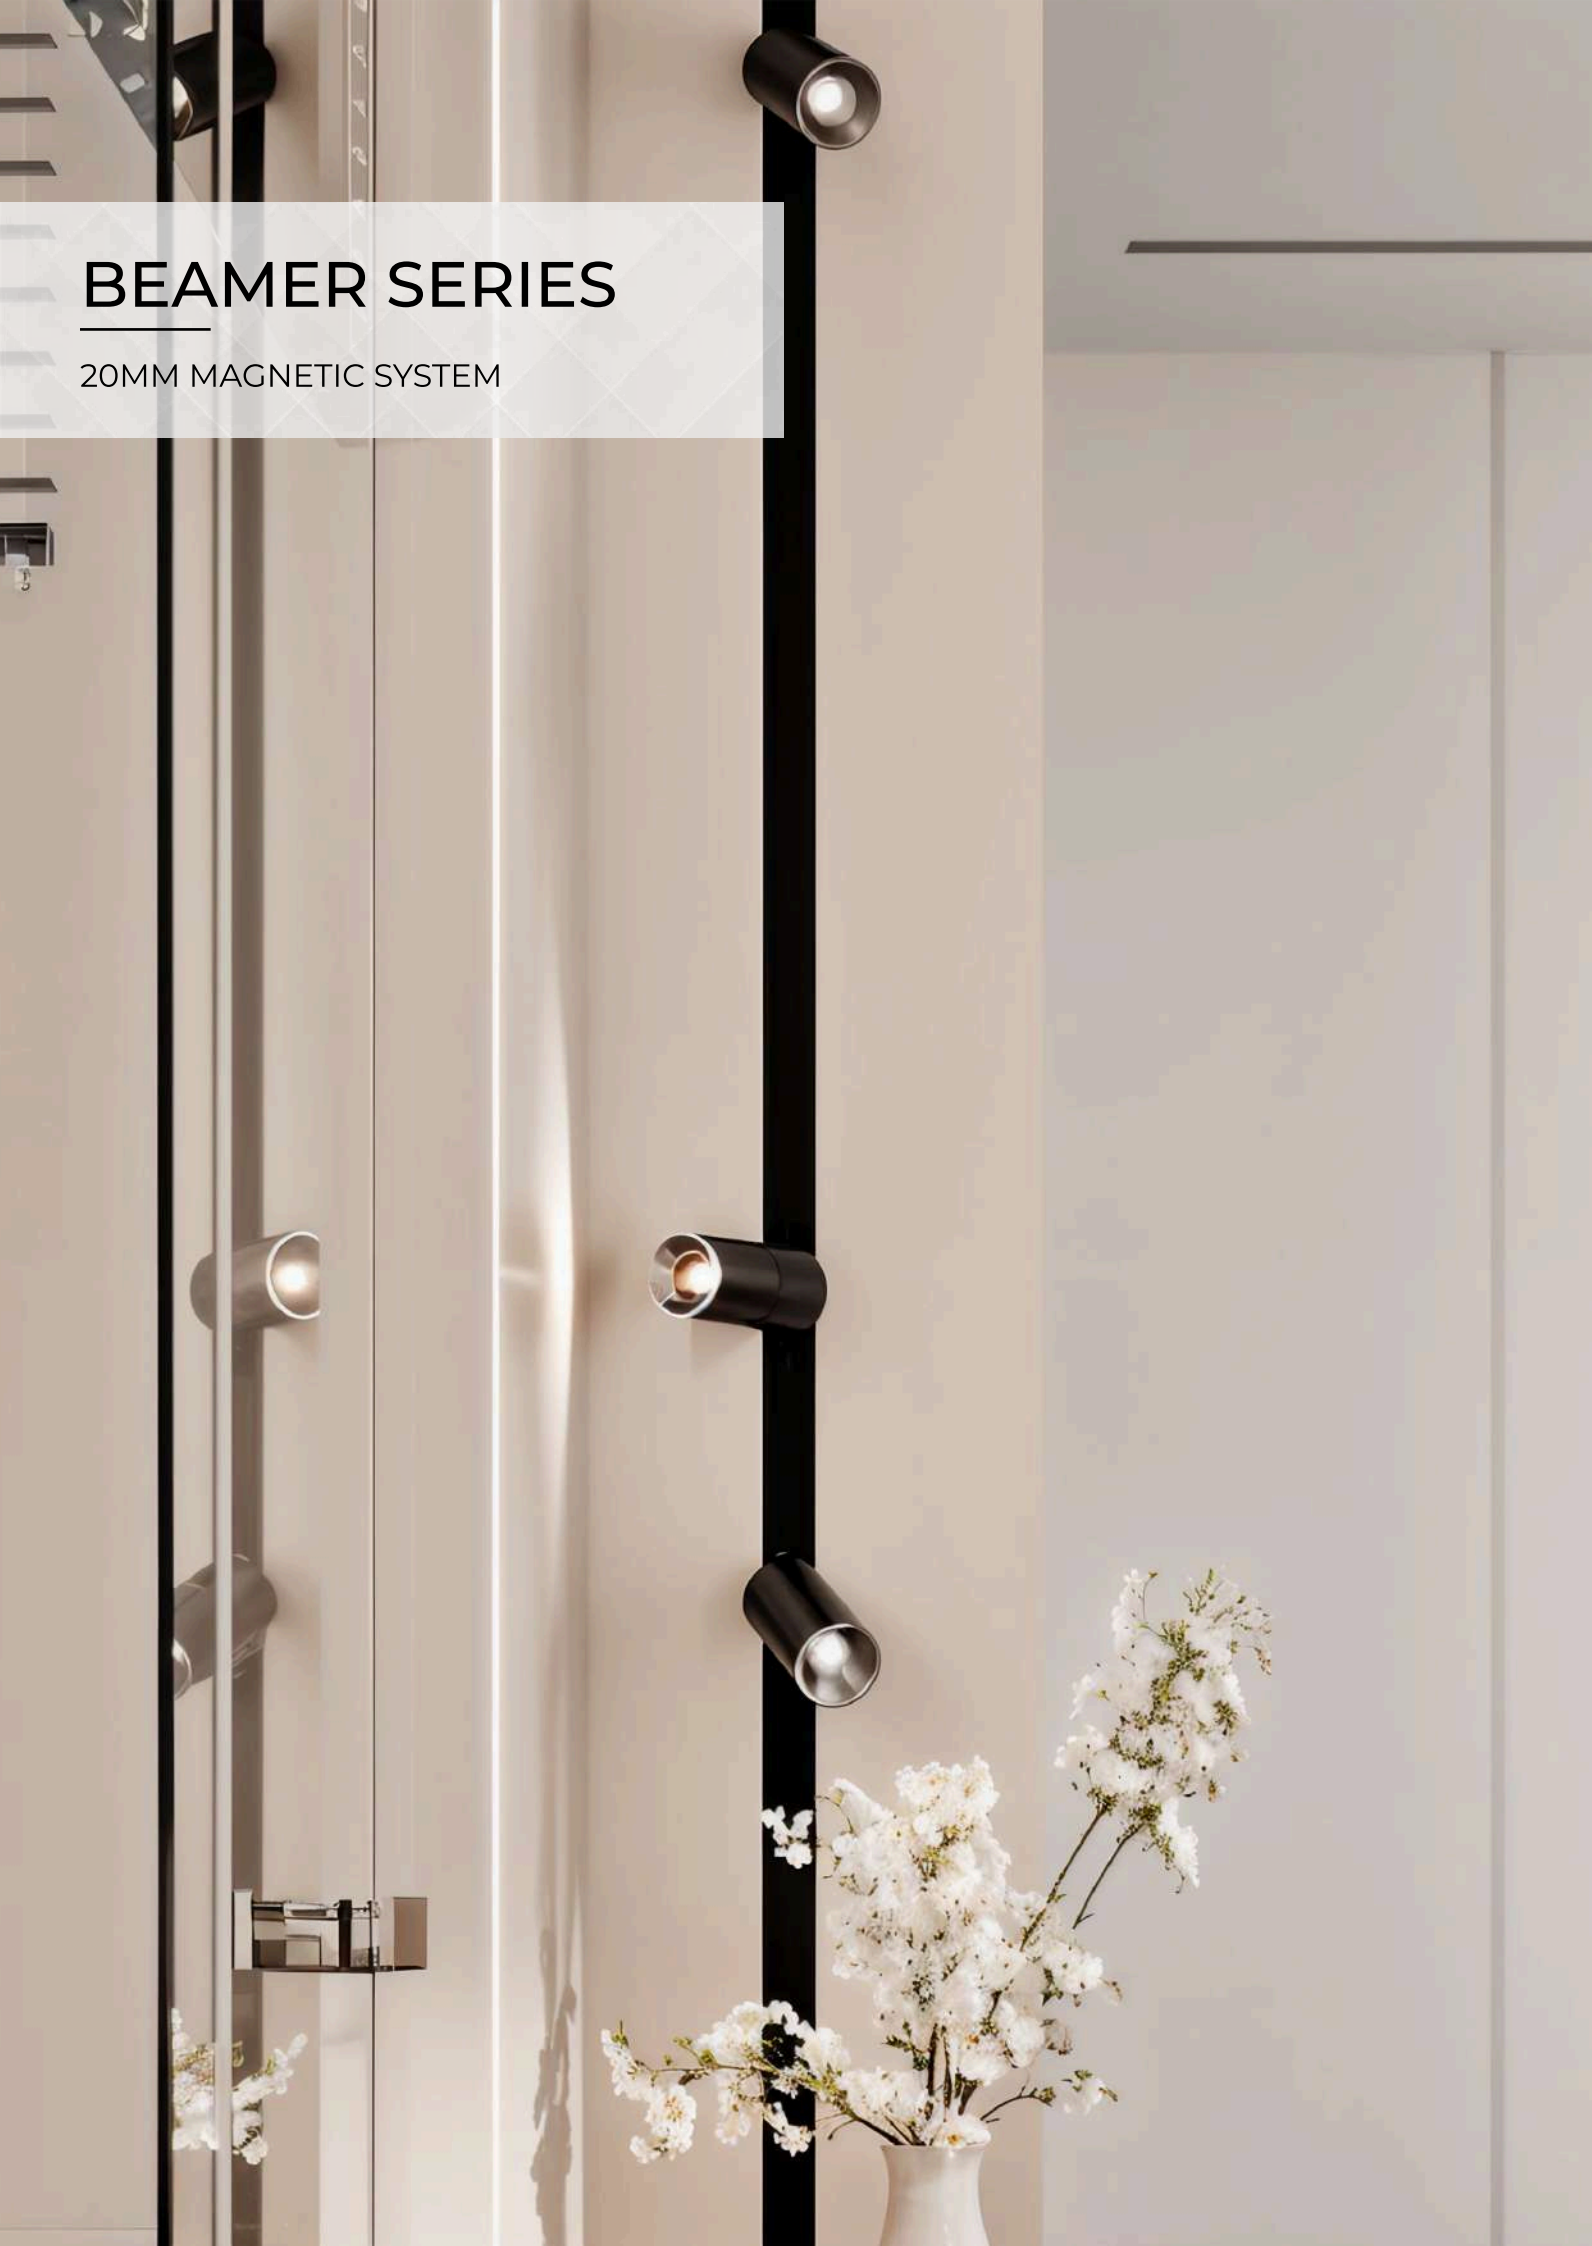

BEAMER SERIES

20MM MAGNETIC SYSTEM



20MM MG BEAMER.1.7.MB.MB.24.3570 .30G


Outer Size(mm) : 35(A)x70(B)x110(C)
Wattage : 7W




20MM MG BEAMER.1.12.MB.MB.24.4386 .30G

Outer Size(mm) : 43(A)x86(B)x120(C)
Wattage : 12W



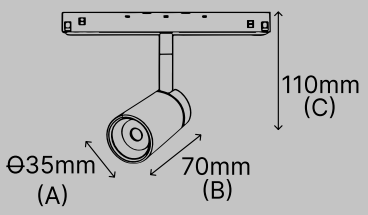

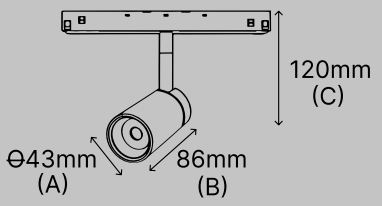

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	DC 48V	CRI	>90
PRODUCT FINISH	Matt Black	SWIVEL/FIXED	Swivel
REFLECTOR FINISH	Matt Black	BEAM ANGLE	24°, 38°
IP RATING	IP 20	DIMMABLE	Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000k, 4000k



RETINA SERIES

20MM MAGNETIC SYSTEM






20MM MG RETINA.4.10.MB.MB.24.7530 .30G

Outer Size(mm) : 75(A)x30(B)x160(C)
Wattage : 10W




20MM MG RETINA.9.20.MB.MB.24.10535 .30G

Outer Size(mm) : 105(A)x35(B)x180(C)
Wattage : 20W

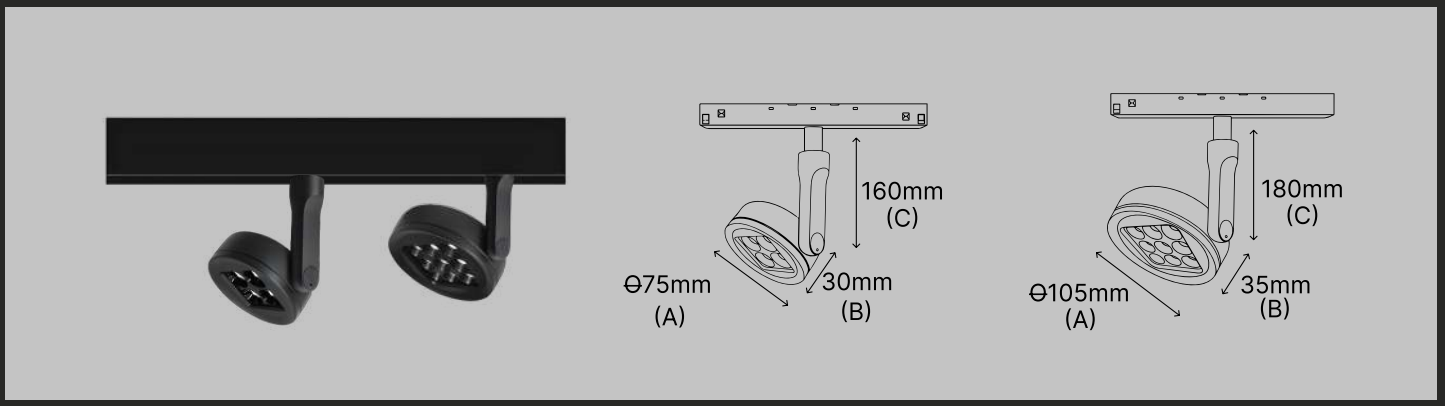

PRODUCT PROPERTIES


LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	DC 48V	CRI	>90
PRODUCT FINISH	Matt Black	SWIVEL/FIXED	Swivel
REFLECTOR FINISH	Matt Black	BEAM ANGLE	24°, 36°
IP RATING	IP 20	DIMMABLE	Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000k, 4000k

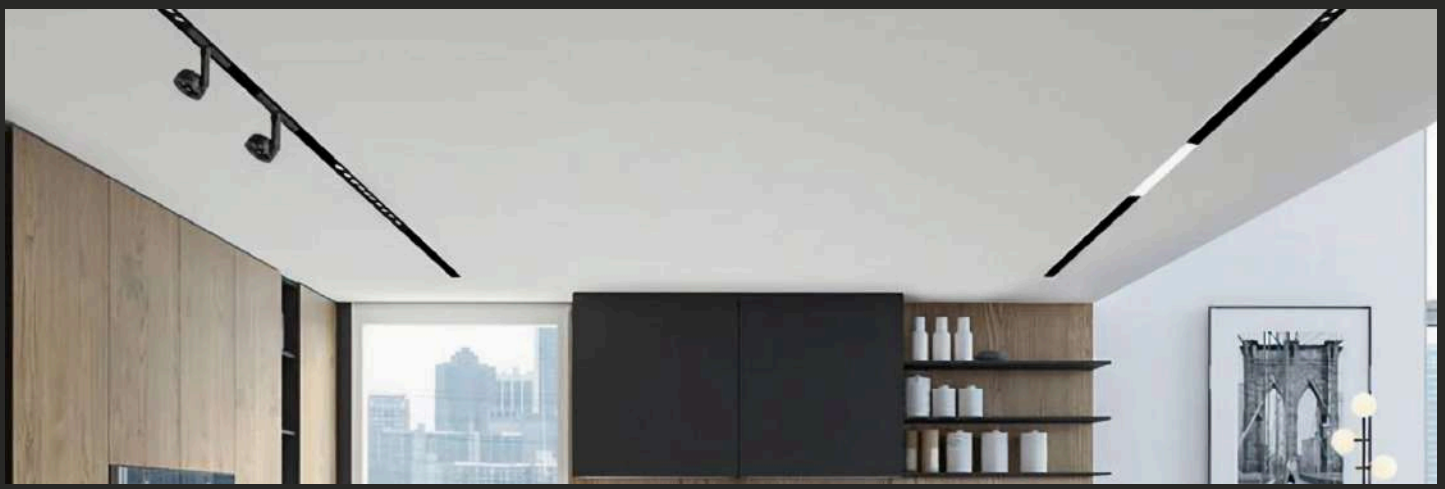




PENDANT SERIES

20MM MAGNETIC SYSTEM

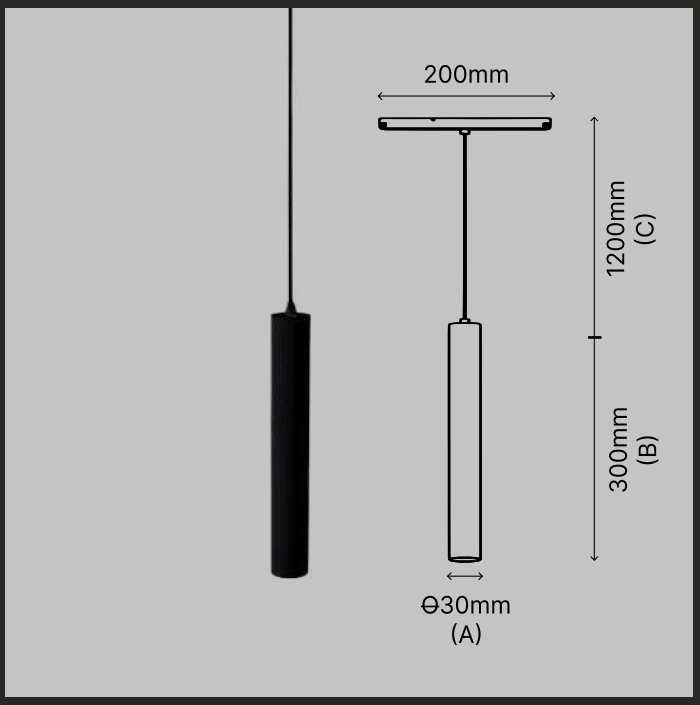

20MM MG PENDANT.1.5.MB.MB.24.30300 .30G

Outer Size(mm) : 30(A)x300(B)x1200(C)
Wattage : 5W

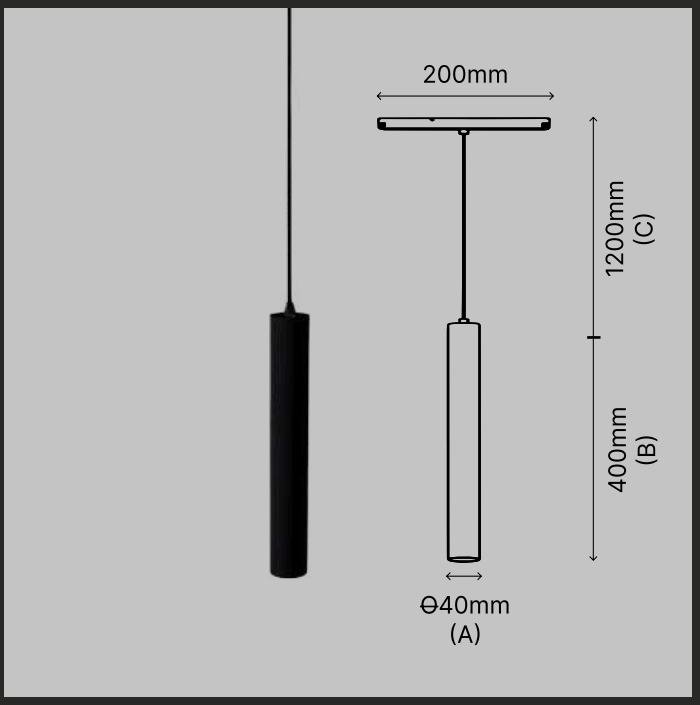


20MM MG PENDANT.1.7.MB.MB.24.40400 .30G

Outer Size(mm) : 40(A)x400(B)x1200(C)
Wattage : 7W


PRODUCT PROPERTIES

LED	Osram
INPUT VOLTAGE	DC 48V
PRODUCT FINISH	Matt Black
REFLECTOR FINISH	Matt Black
IP RATING	IP 20
OPERATING TEMPERATURE	0-50°c
HOUSING MATERIAL	Aluminium Die Cast
CRI	>90
SWIVEL/FIXED	Fixed
BEAM ANGLE	15°, 24°,38°
DIMMABLE	Analogue / Dali (on request)
CCT	3000k, 4000k

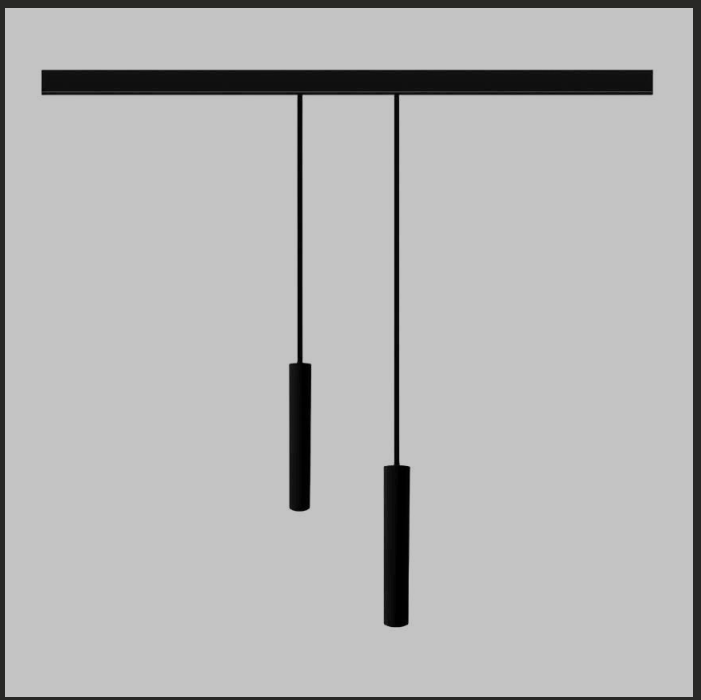


10mm MAGNETIC SYSTEM


TRACK RECESSED & SURFACE

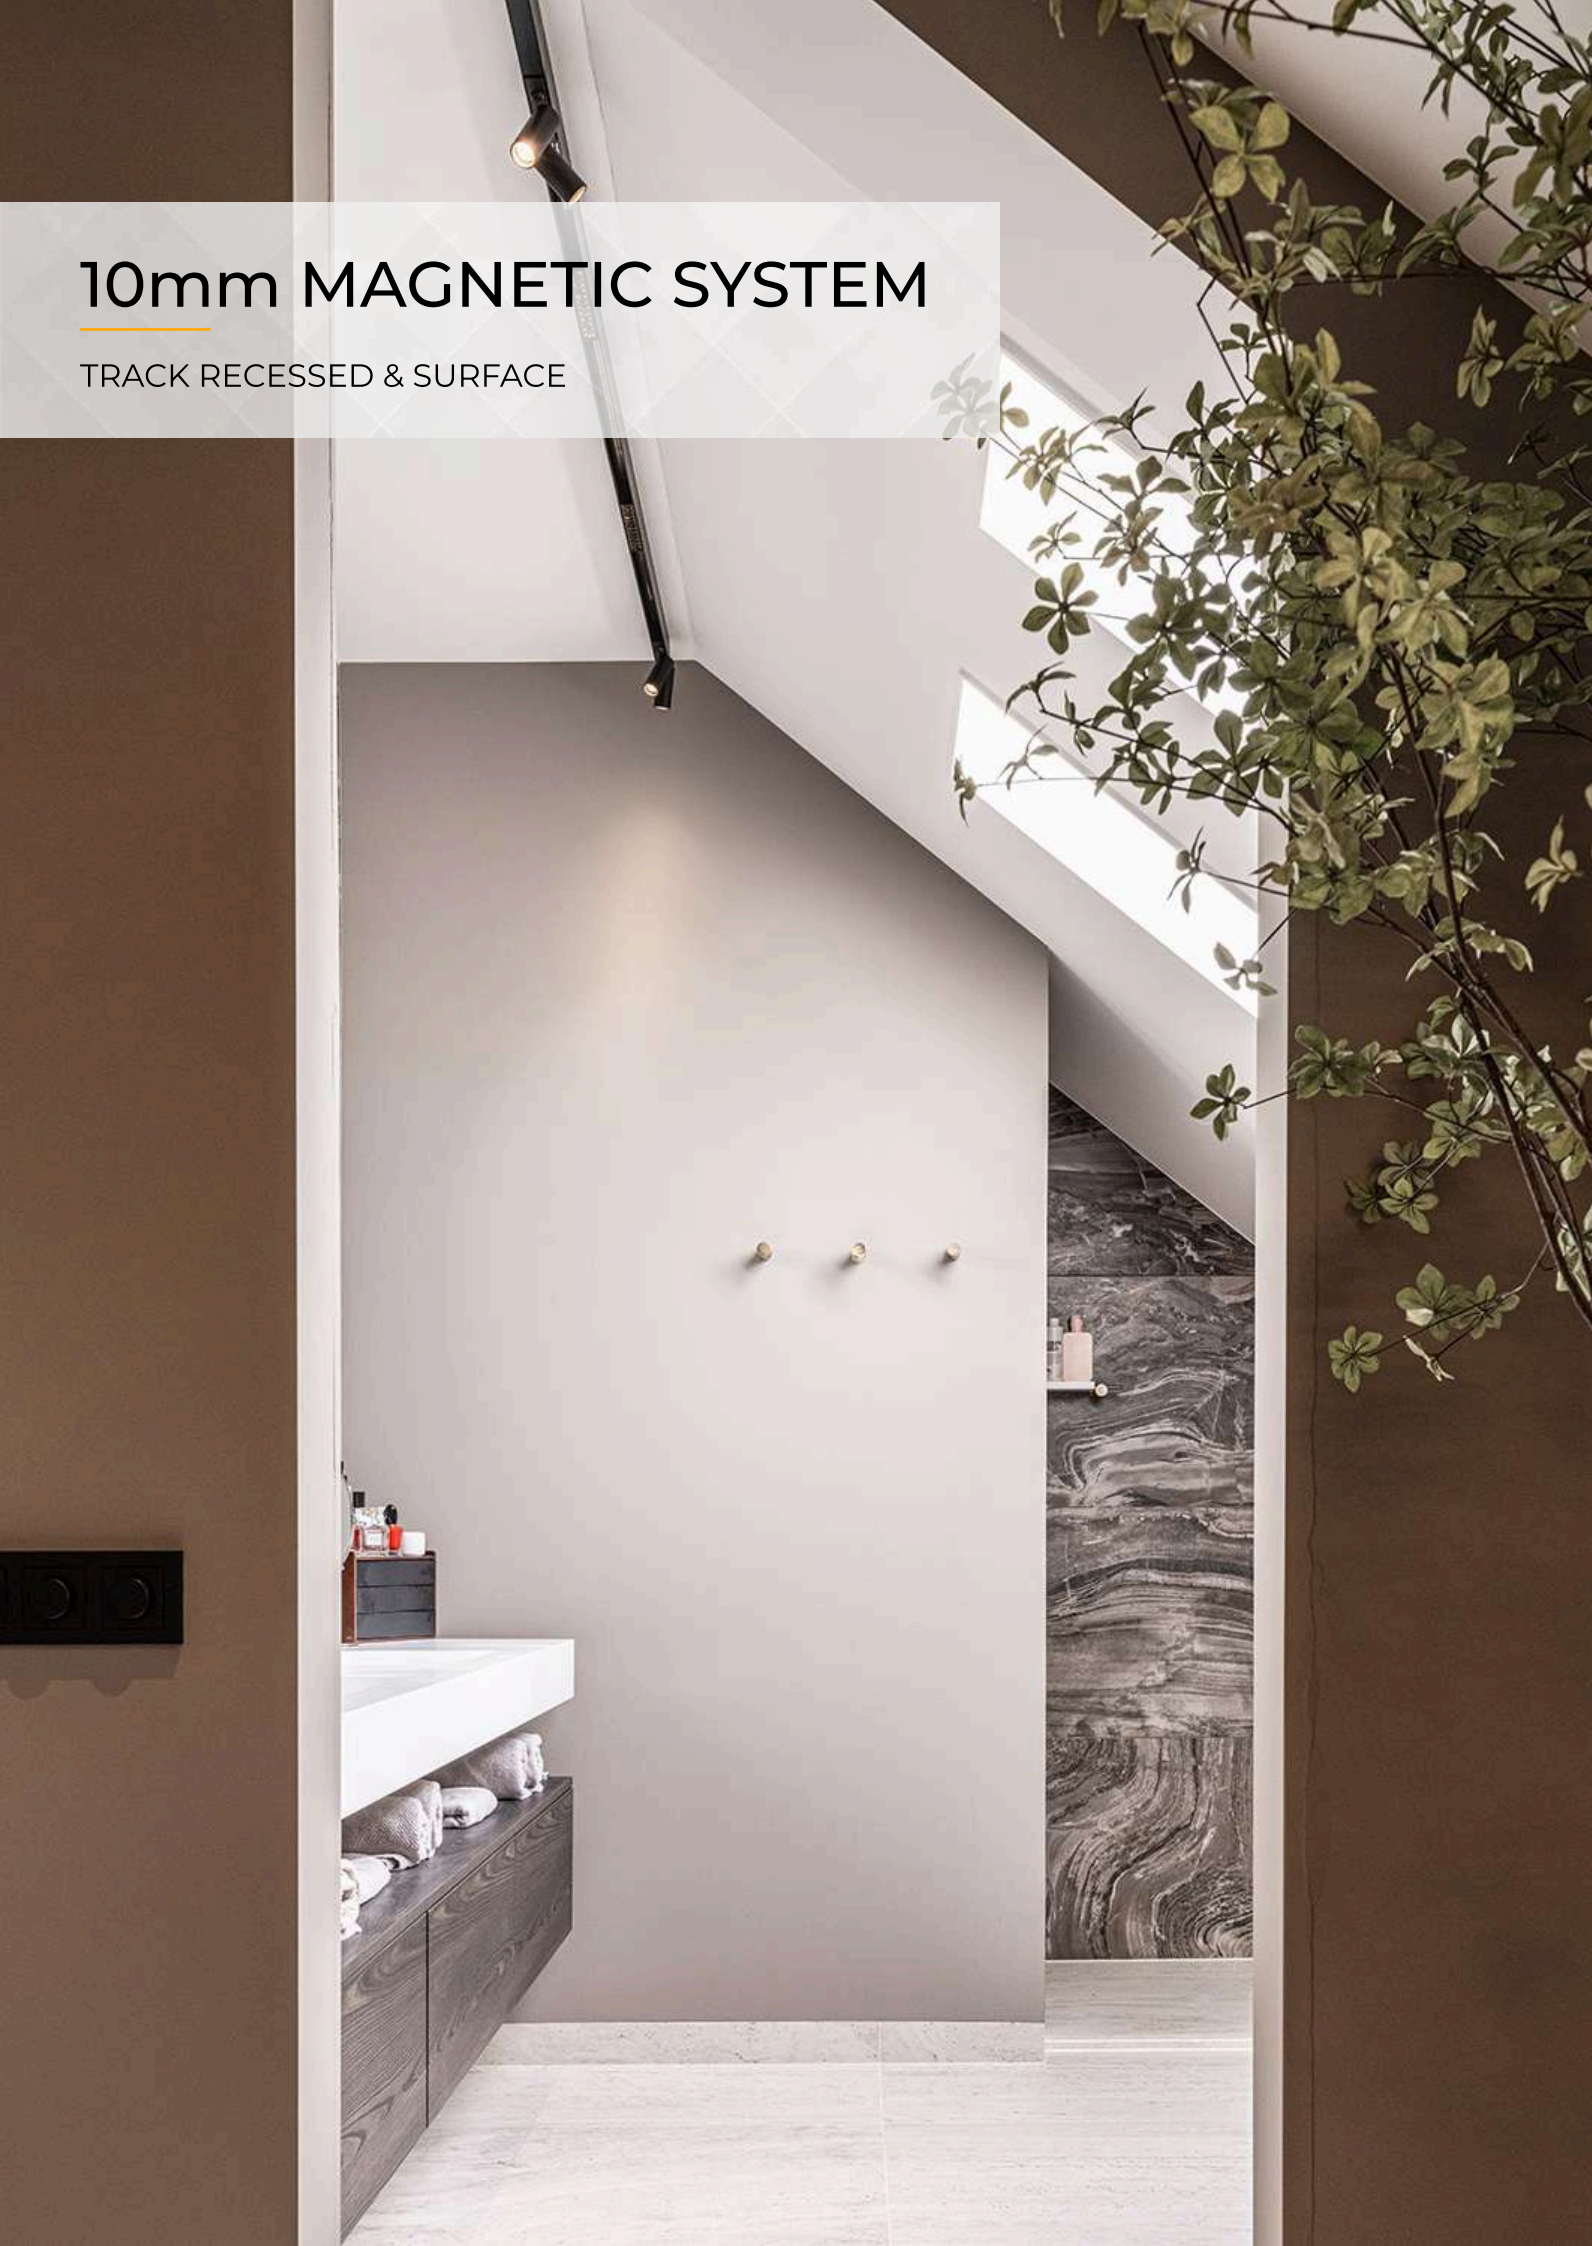

TRACK RECESSED







10MM MG TRACK RECESSED.1M.48V-INDOOR

Size(mm) : 1000(L)x50(W)x40(H)
Input : DC 48V
Material : Aluminium


10MM MG TRACK RECESSED.2M.48V-INDOOR


Size(mm) : 2000(L)x50(W)x40(H)
Input : DC 48V
Material : Aluminium


10MM MG TRACK RECESSED.3M.48V-INDOOR

Size(mm) : 3000(L)x50(W)x40(H)
Input : DC 48V
Material : Aluminium

TRACK SURFACE

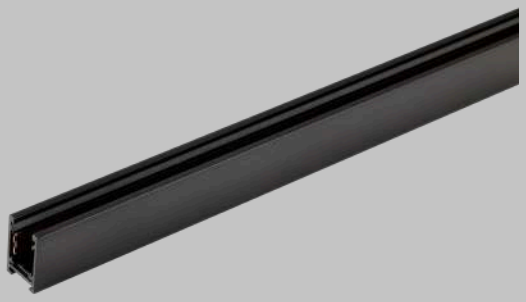

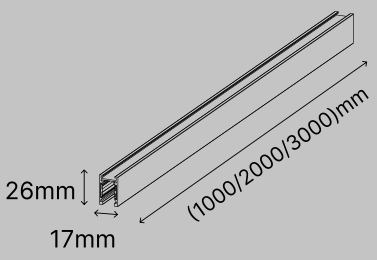



10MM MG TRACK SURFACE.1M.48V-INDOOR

Size(mm) : 1000(L)x17(W)x26(H)
Input : DC 48V
Material : Aluminium

10MM MG TRACK SURFACE.2M.48V-INDOOR

Size(mm) : 2000(L)x17(W)x26(H)
Input : DC 48V
Material : Aluminium

10MM MG TRACK SURFACE.3M.48V-INDOOR


Size(mm) : 3000(L)x17(W)x26(H)
Input : DC 48V
Material : Aluminium


10mm MAGNETIC SYSTEM

TRACK ROUND SURFACE





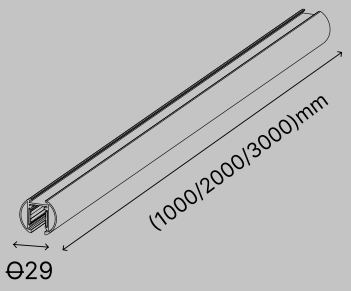



10MM MG TRACK ROUND.1M.48V-INDOOR

Size(mm) : 1000(L)xDia 29
Input : DC 48V
Material : Aluminium

10MM MG TRACK ROUND.2M.48V-INDOOR

Size(mm) : 2000(L)xDia 29
Input : DC 48V
Material : Aluminium

10MM MG TRACK ROUND.3M.48V-INDOOR

Size(mm) : 3000(L)xDia 29
Input : DC 48V
Material : Aluminium





CONNECTORS


10MM MAGNETIC SYSTEM




10MM MG TRACK POWER LEAD




10MM MG TRACK POWER CONNECTOR STRAIGHT

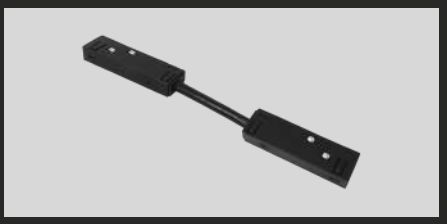


10MM MG TRACK POWER CONNECTOR L

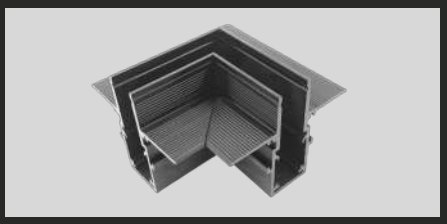

10MM MG TRACK L CORNER RECESSED (C2C)

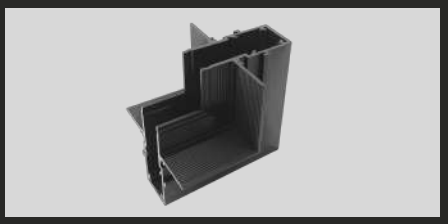

10MM MG TRACK L CORNER RECESSED (C2W)

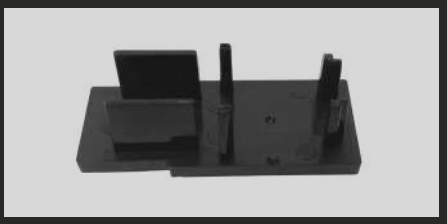

10MM MG TRACK RECESSED END CAPS



10MM MG TRACK SURFACE END CAPS



10MM MG TRACK ROUND END CAPS



10MM TRACK L CORNER SURFACE(C2C)



10MM MG TRACK L CORNER SURFACE (C2W)



10MM NG TRACK CEILING HUNG 1 WAY JOINTER S01W




10MM MG TRACK CEILING HUNG 2 WAY JOINTER S02W




10MM MG TRACK CEILING HUNG 3 WAY JOINTER S03W



10MM MG TRACK CEILING HUNG 4 WAY JOINTER S04W

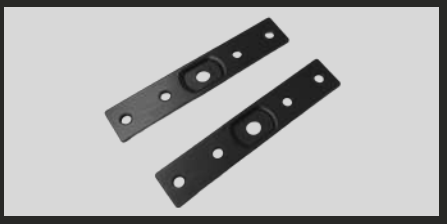


10MM MG TRACK SURFACE JOINTER PATTI METAL

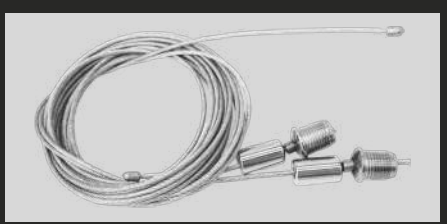


10MM MG TRACK HANGING KIT METAL

LANKY SERIES

10MM MAGNETIC SYSTEM

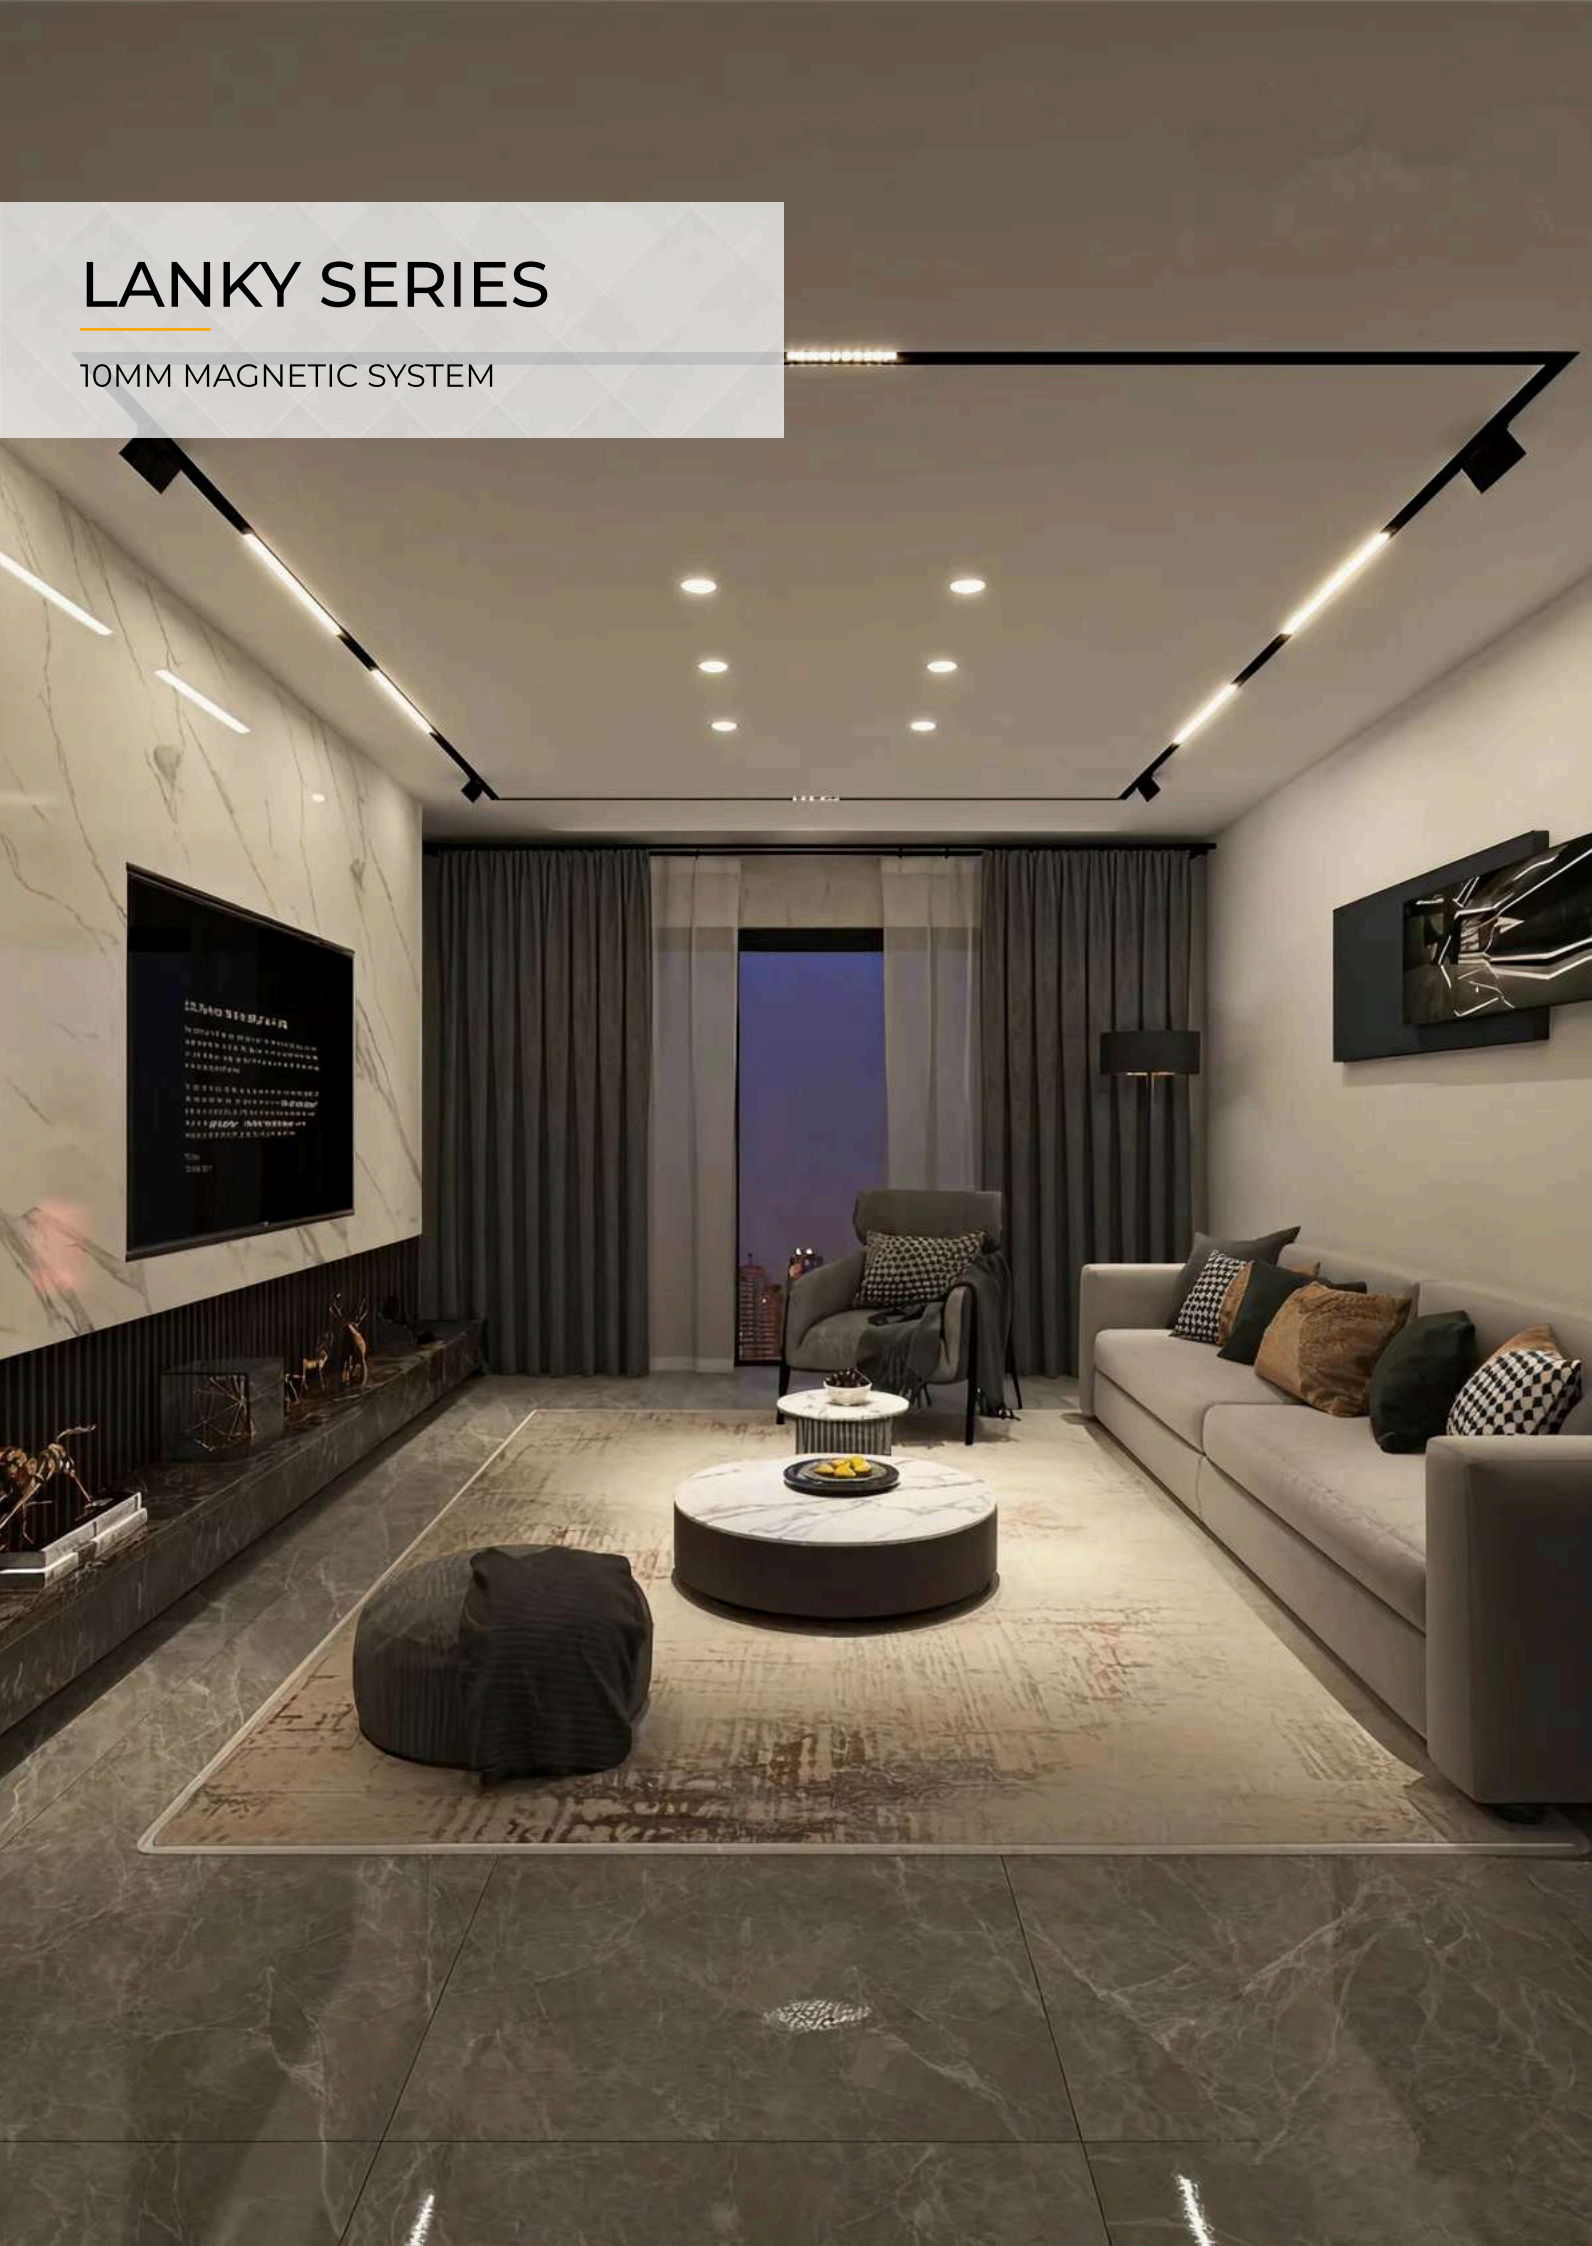




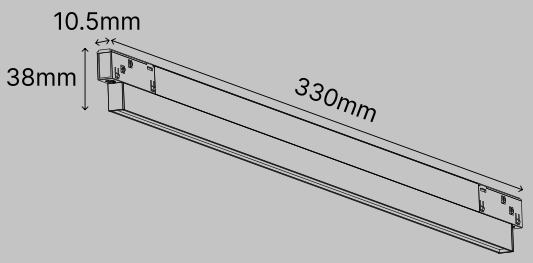

10MM MG LANKY 1030S.1.8.MB.MB.100.33010.30G

Outer Size(mm) : 330(L)x10.5(W)
Wattage : 8W



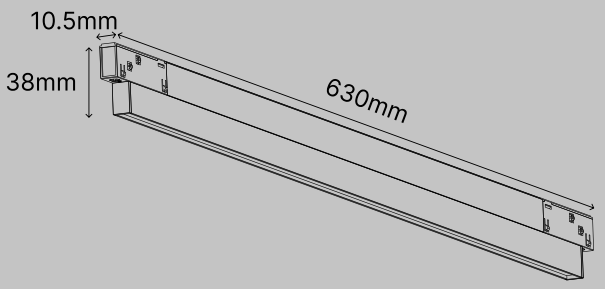

10MM MG LANKY 1060S.1.16.MB.MB.100.63010.30G

Outer Size(mm) : 630(L)x10.5(W)
Wattage : 16W

PRODUCT PROPERTIES


LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	DC 48V	CRI	>90
PRODUCT FINISH	Matt Black	SWIVEL/FIXED	Fixed
REFLECTOR FINISH	Diffuser	BEAM ANGLE	100°
IP RATING	IP 20	DIMMABLE	Dali (on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000k, 4000k

SPECK SERIES

10MM MAGNETIC SYSTEM






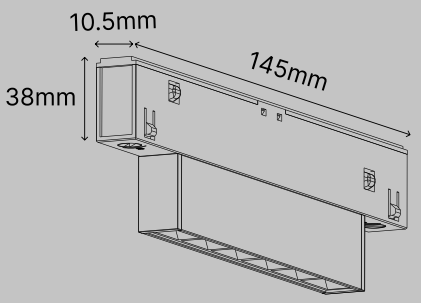

10MM MG SPECK 1006S.6.5.MB.MB.30.14510.30G

Outer Size(mm) : 145(L)x10.5(W)x38(H)
Wattage : 5W




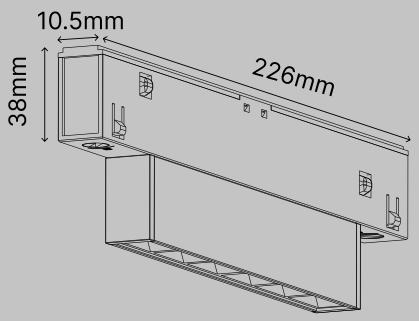

10MM MG SPECK 1012S.12.10.MB.MB.30.22610.30G

Outer Size(mm) : 226(L)x10.5(W)x38(H)
Wattage : 10W



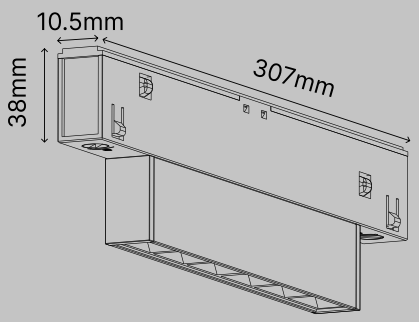

10MM MG SPECK 1018S.18.15.MB.MB.30.30710.30G

Outer Size(mm) : 307(L)x10.5(W)x38(H)
Wattage : 15W

PRODUCT PROPERTIES


LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	DC 48V	CRI	>90
PRODUCT FINISH	Matt Black	SWIVEL/FIXED	Fixed
REFLECTOR FINISH	Matt Black	BEAM ANGLE	30°
IP RATING	IP 20	DIMMABLE	Dali (on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000k, 4000k



SPECK ADJUST SERIES

10MM MAGNETIC SYSTEM



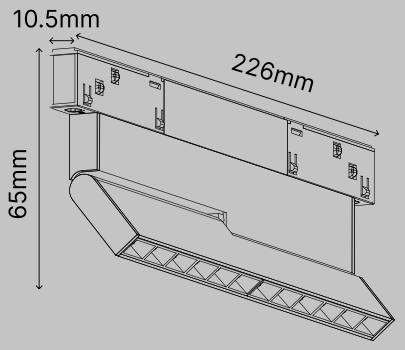


10MM MG SPECK ADJUST SA1012S.12.10.MB.MB.30.22610.30G

Outer Size(mm) : 226(L)x10.5(W)x65(H)
Wattage : 10W


PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	DC 48V	CRI	>90
PRODUCT FINISH	Matt Black	SWIVEL / FIXED	Swivel
REFLECTOR FINISH	Matt Black	BEAM ANGLE	30°
IP RATING	IP 20	DIMMABLE	Dali (on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000k, 4000k

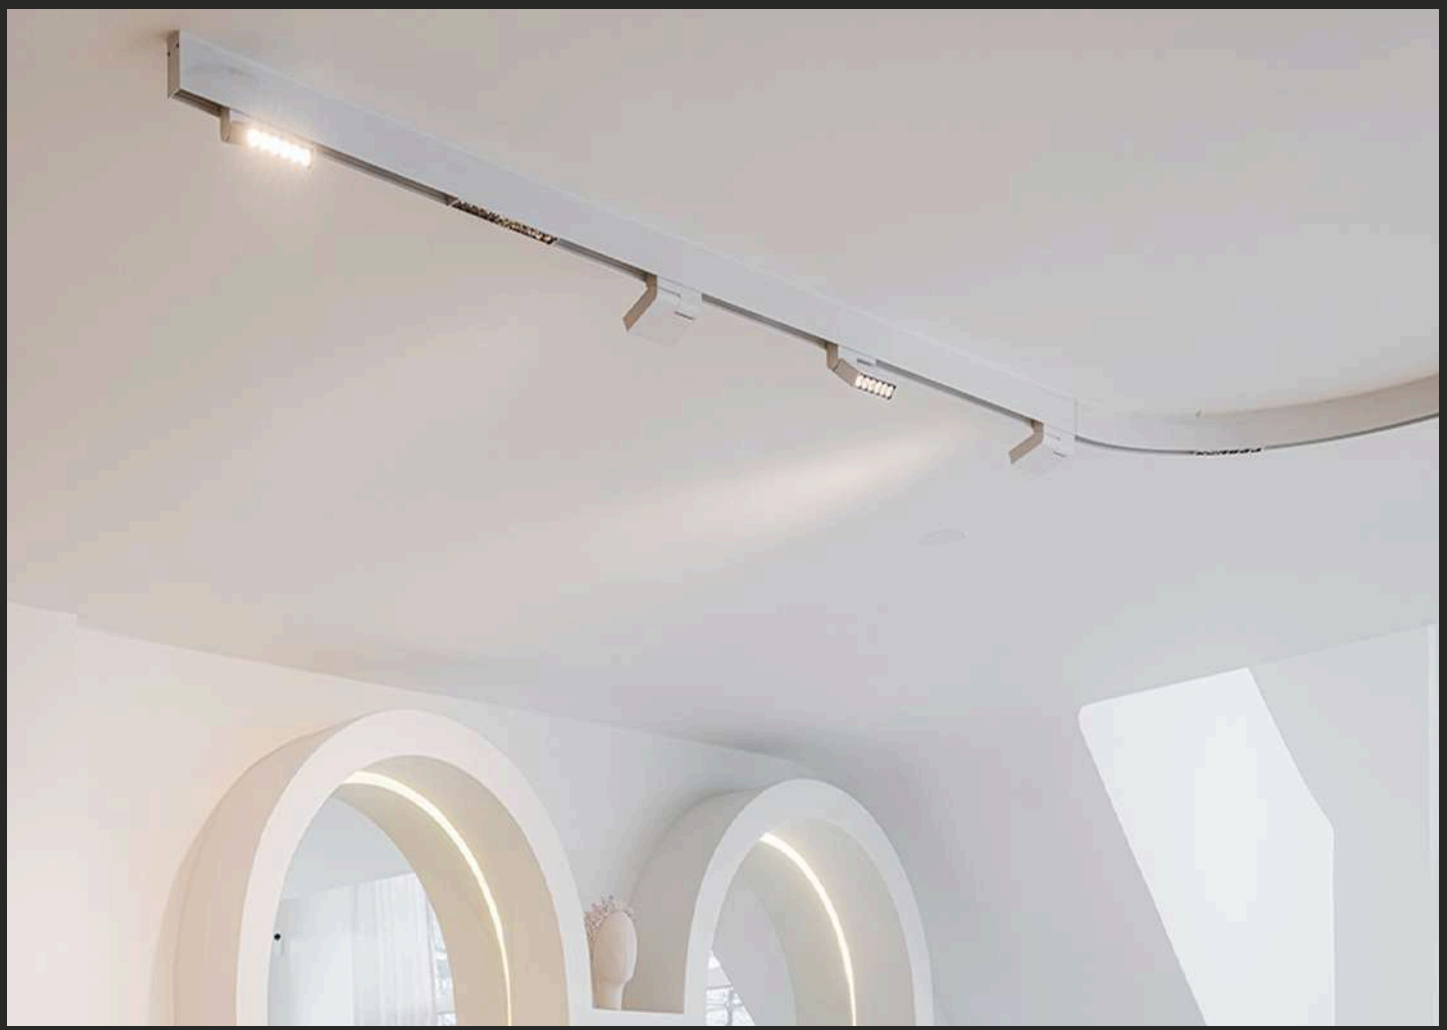


BEAMER SERIES

10MM MAGNETIC SYSTEM

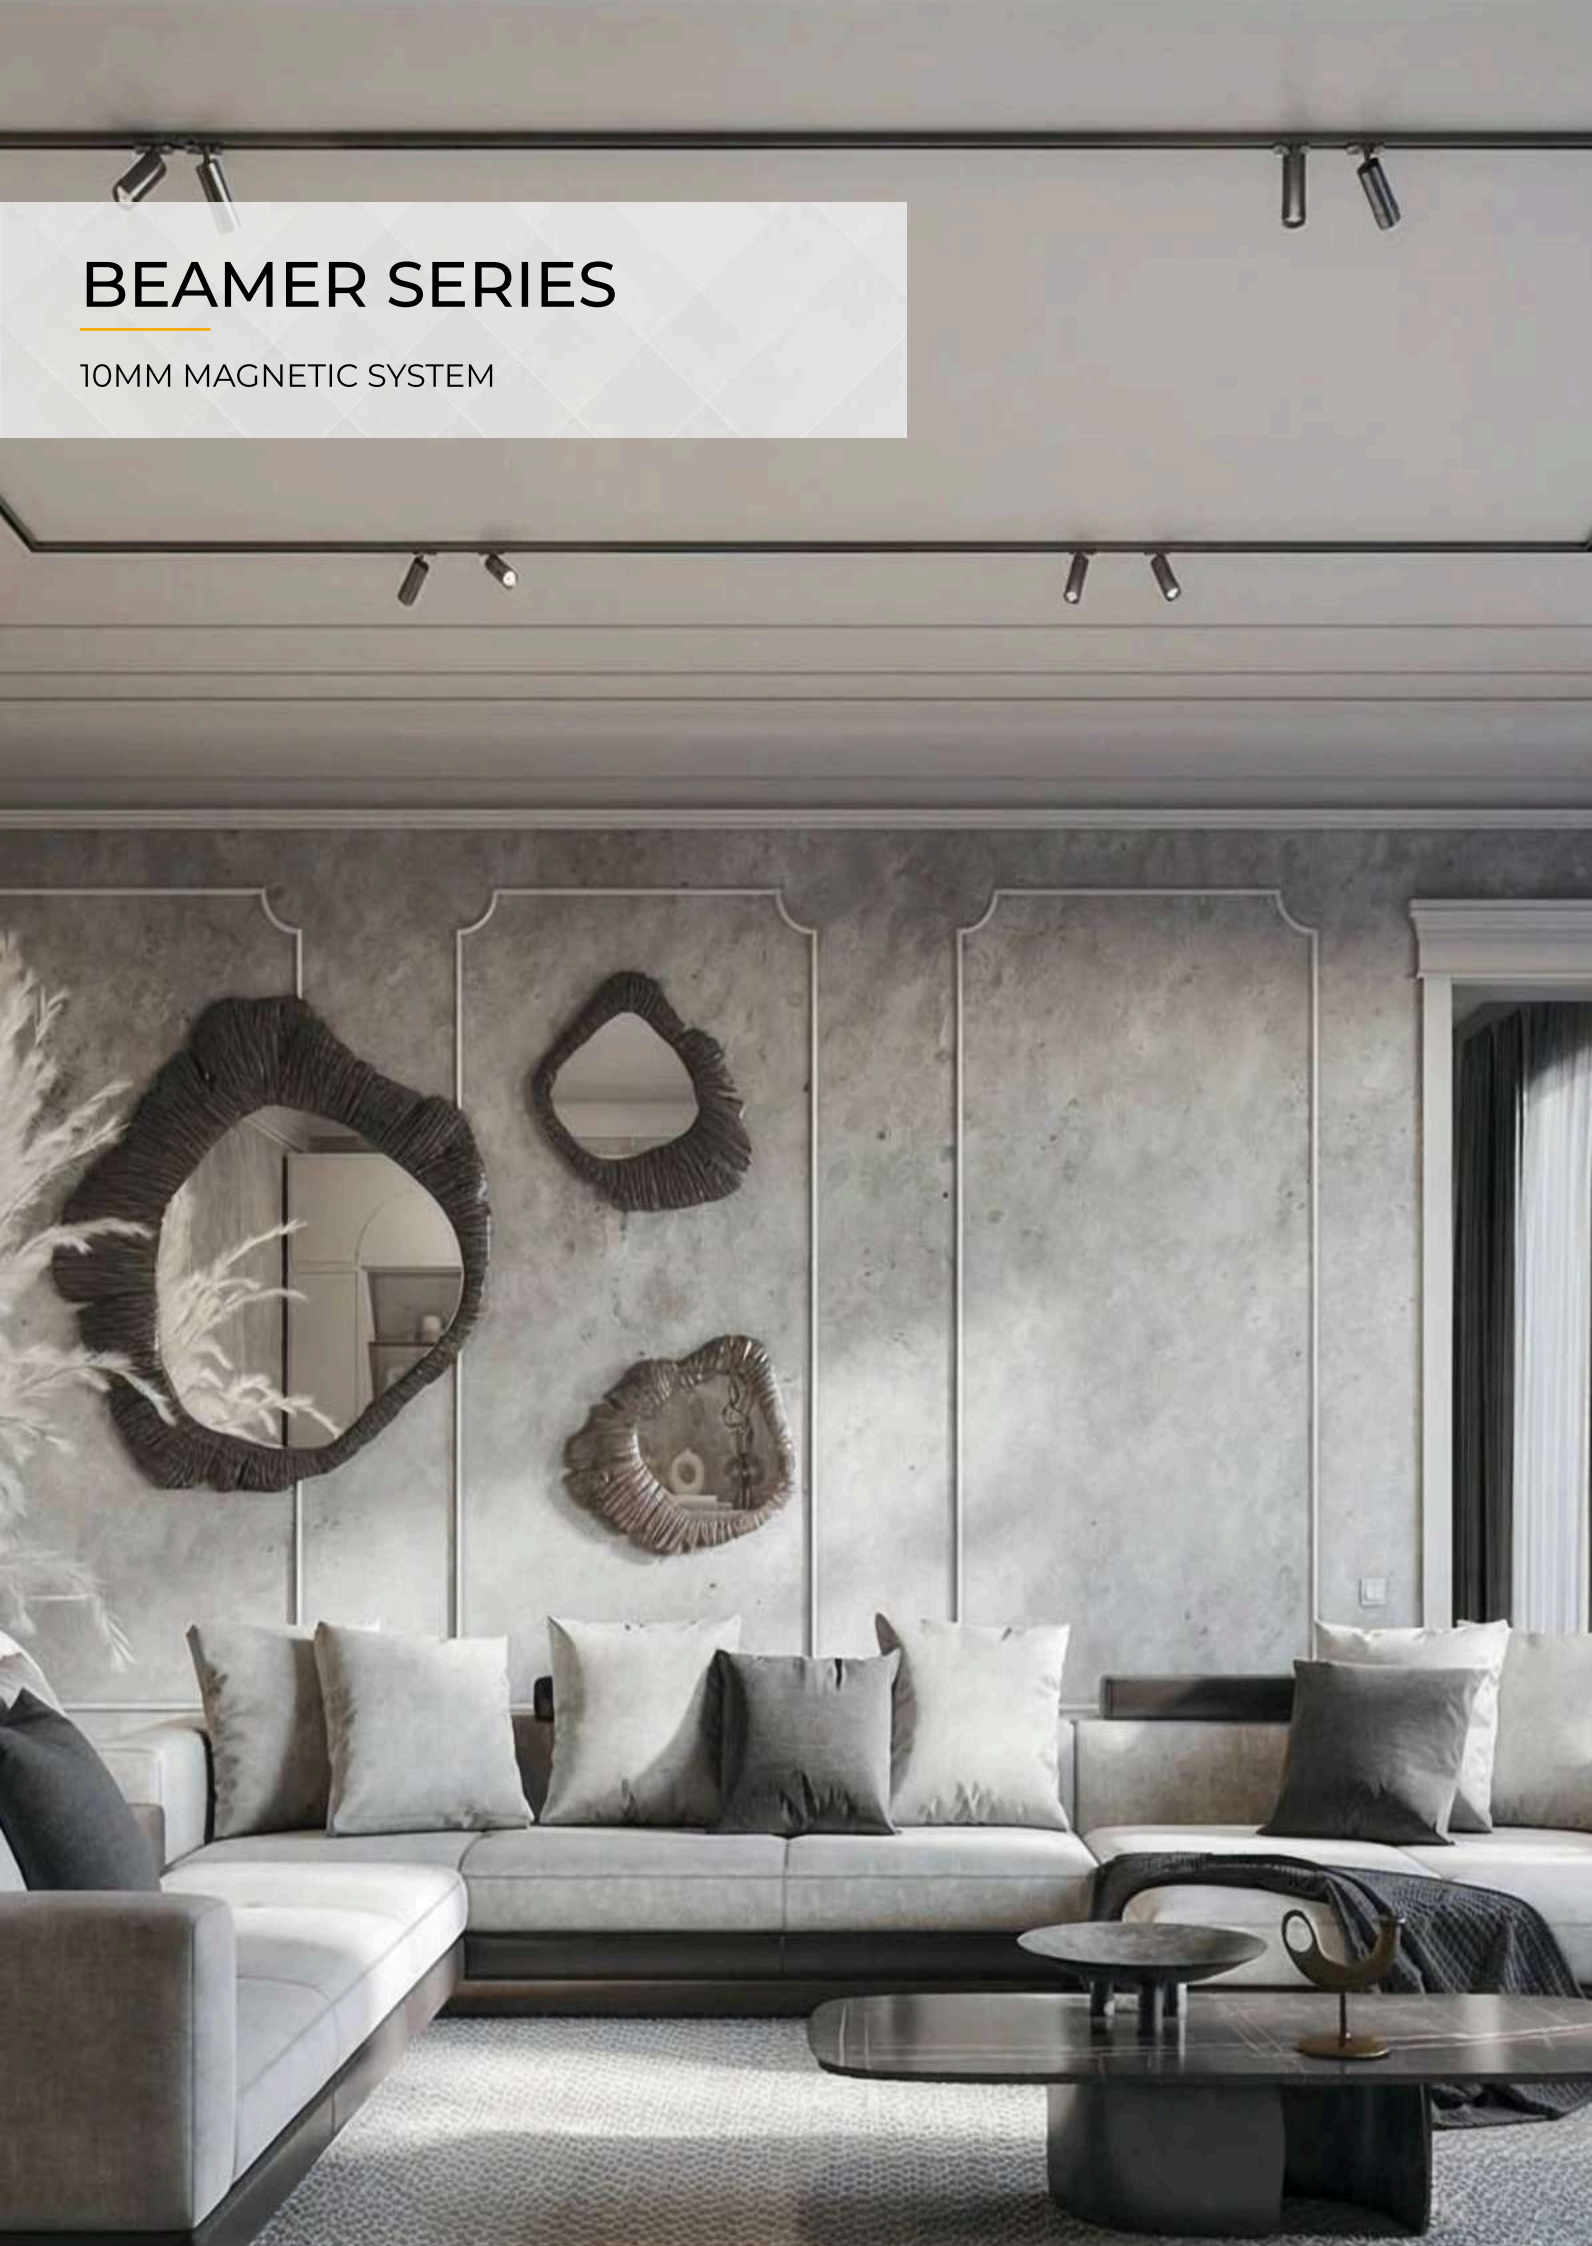




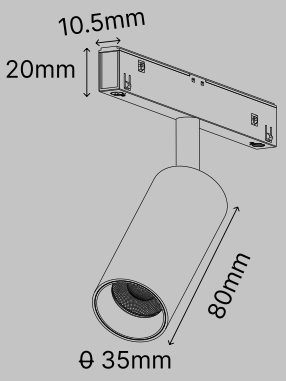

10MM MG BEAMER 3035R.1.5.MB.MB.36.35.30G

Outer Size(mm) : Dia 35x80(H)
Wattage : 5W



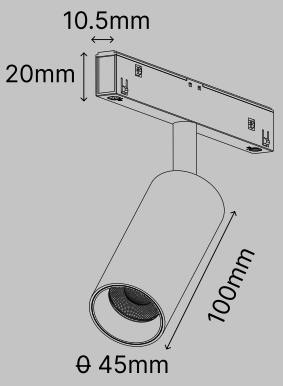

10MM MG BEAMER 3045R.1.10.MB.MB.36.45.30G

Outer Size(mm) : Dia 45x100(H)
Wattage : 10W

PRODUCT PROPERTIES


LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	DC 48V	CRI	>90
PRODUCT FINISH	Matt Black	SWIVEL / FIXED	Swivel
REFLECTOR FINISH	Matt Black	BEAM ANGLE	36°
IP RATING	IP 20	DIMMABLE	Dali (on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000K, 4000K



HALO SERIES

10MM MAGNETIC SYSTEM



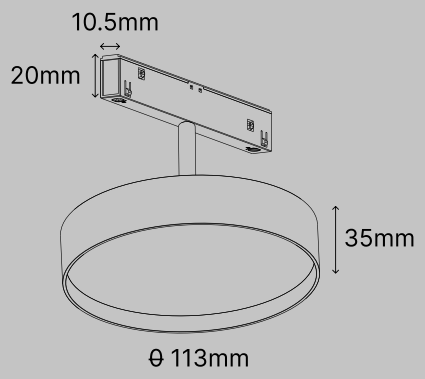


10MM MG HALO 8513DR.1.12.MB.MB.100.113.30G

Outer Size(mm) : Dia 113x35(H)
Wattage : 12W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	DC 48V	CRI	>90
PRODUCT FINISH	Matt Black	SWIVEL / FIXED	Swivel
REFLECTOR FINISH	Matt Black	BEAM ANGLE	100°
IP RATING	IP 20	DIMMABLE	Dali (on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000k, 4000k




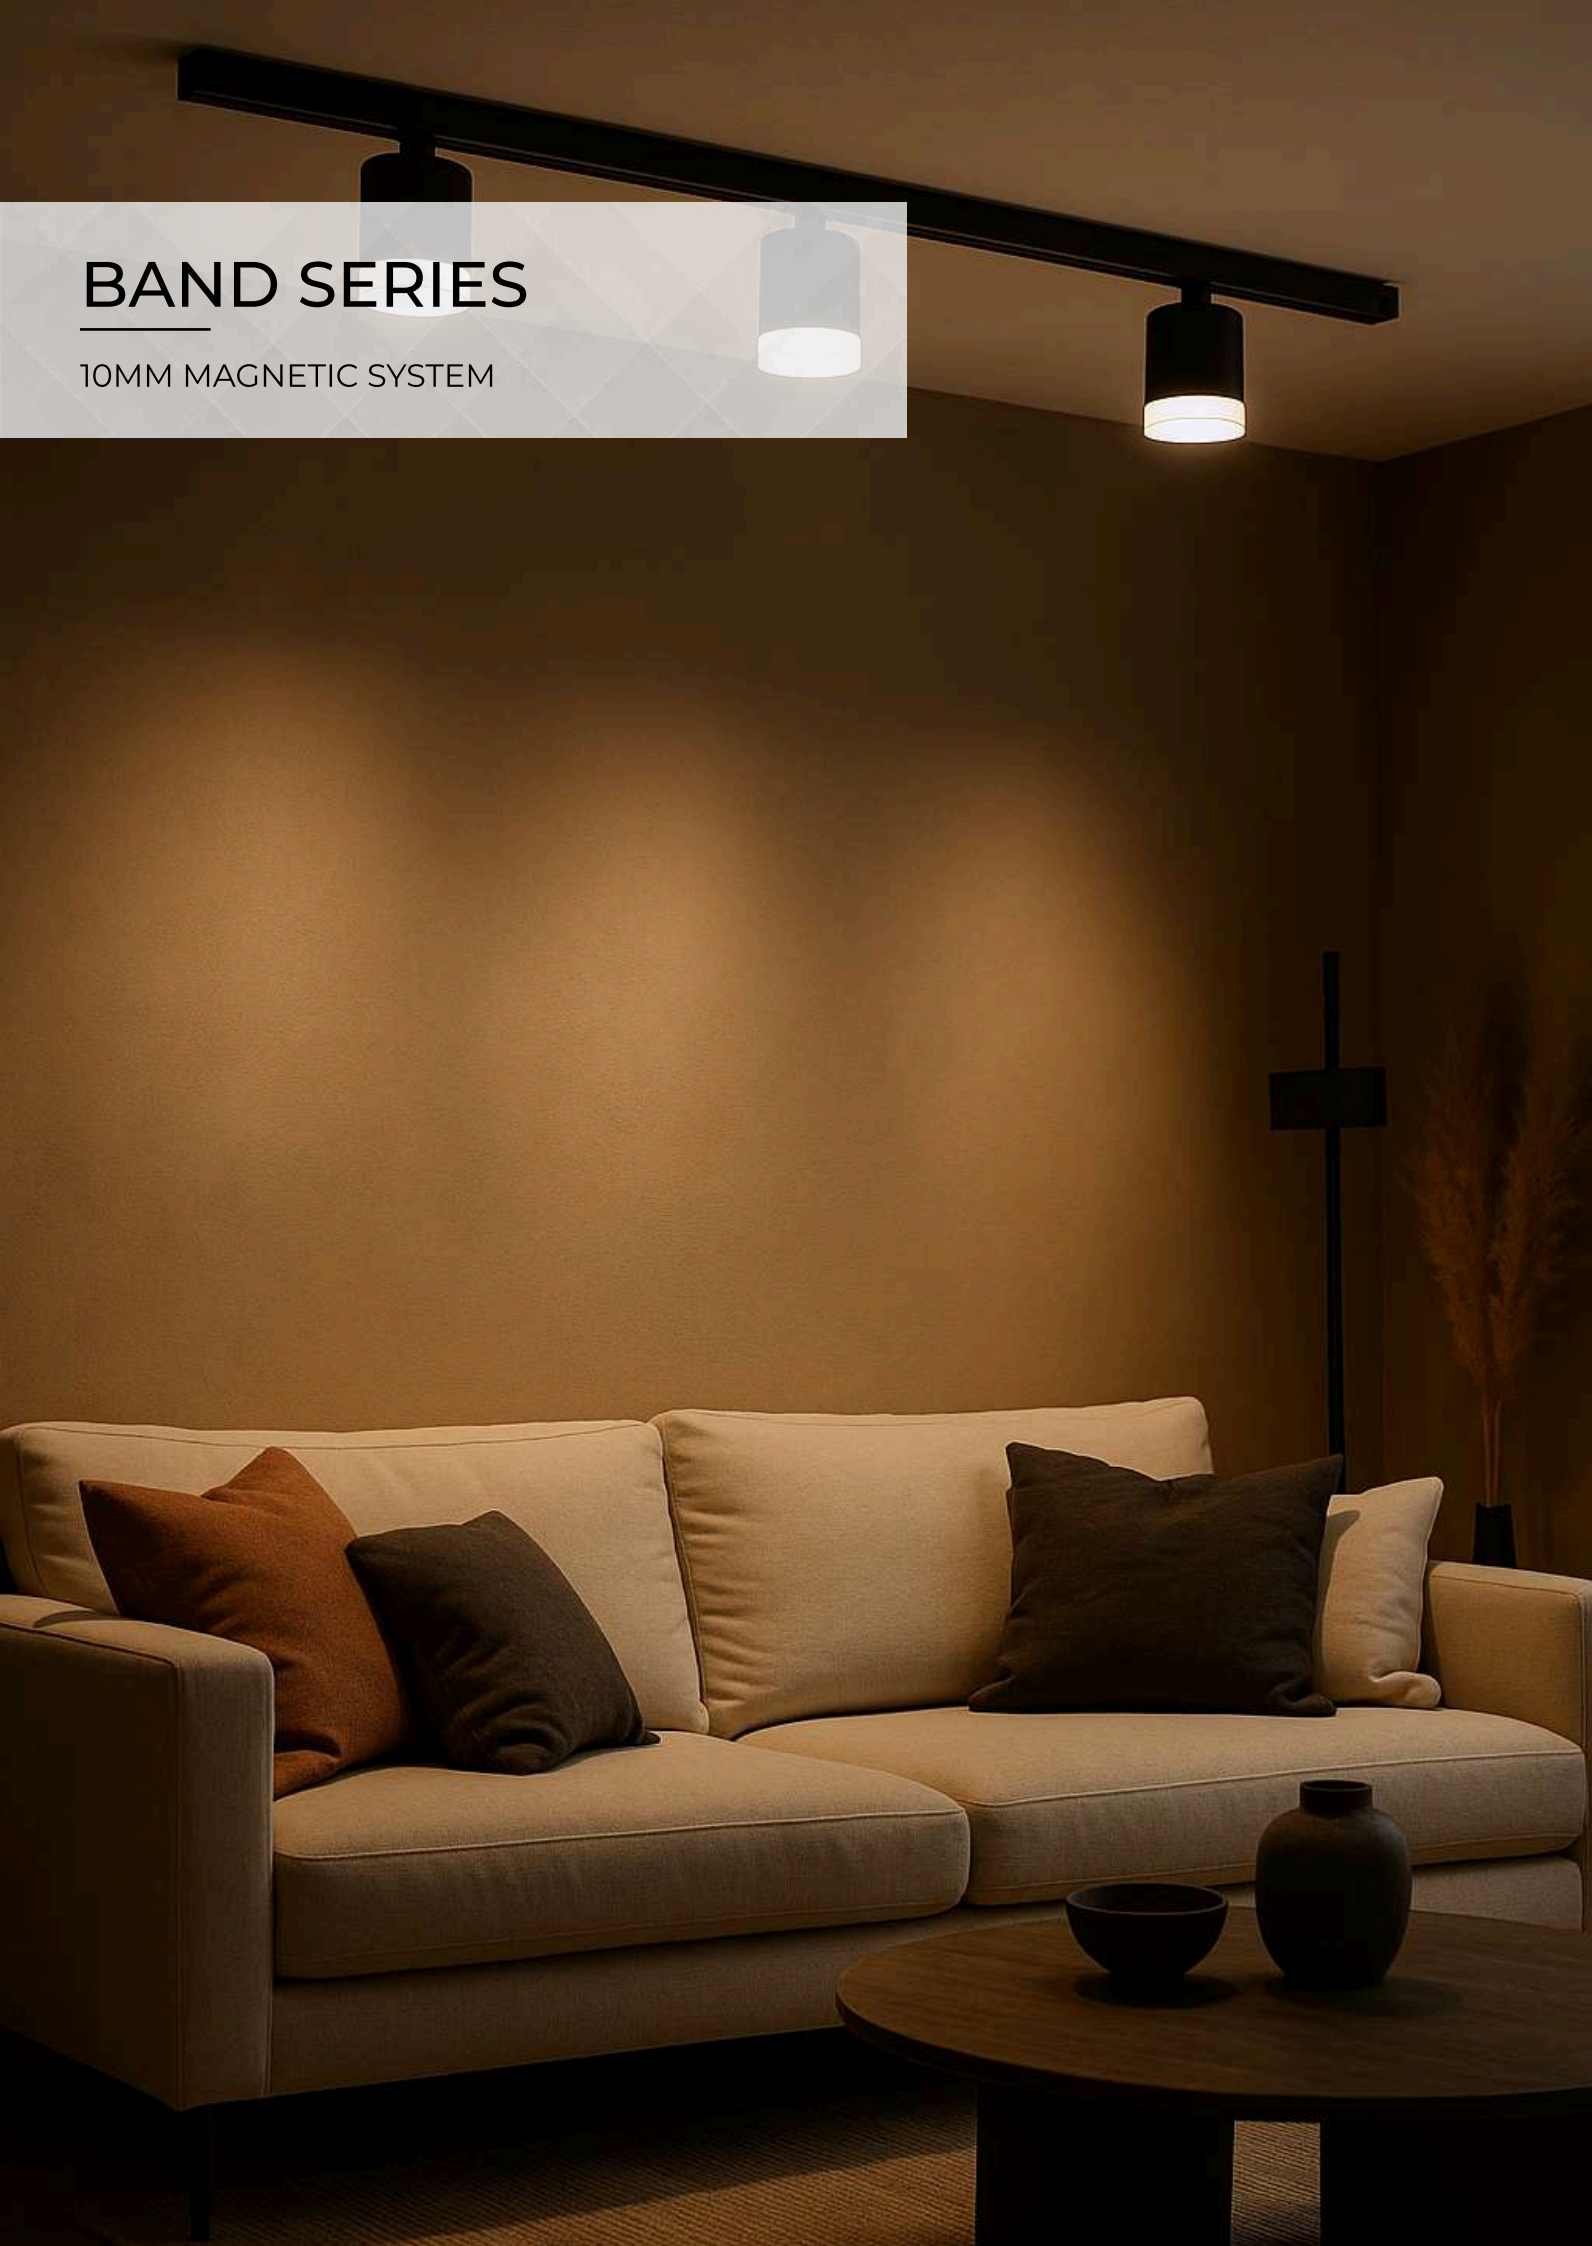

BAND SERIES

10MM MAGNETIC SYSTEM



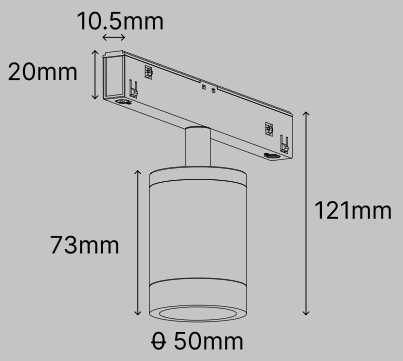


10MM MG BAND 4150R-A.1.6.MB.MB.36.50.30G

Outer Size(mm) : Dia 50x73(H)
Wattage : 6W


PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	DC 48V	CRI	>90
PRODUCT FINISH	Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt Black	BEAM ANGLE	36°
IP RATING	IP 20	DIMMABLE	Dali (on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000k, 4000k

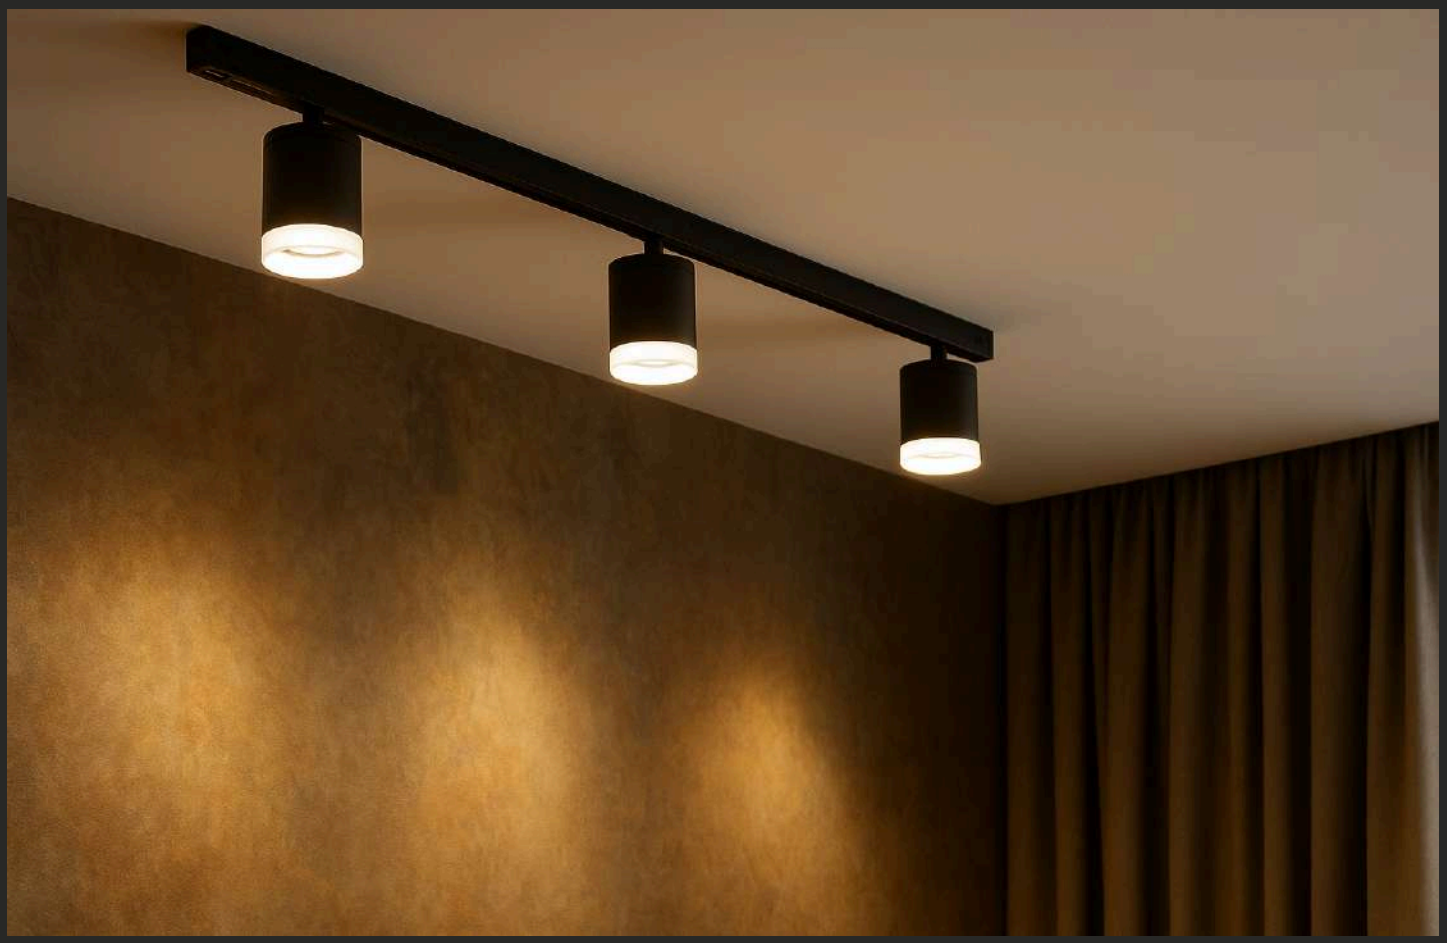

DROP SERIES

10MM MAGNETIC SYSTEM

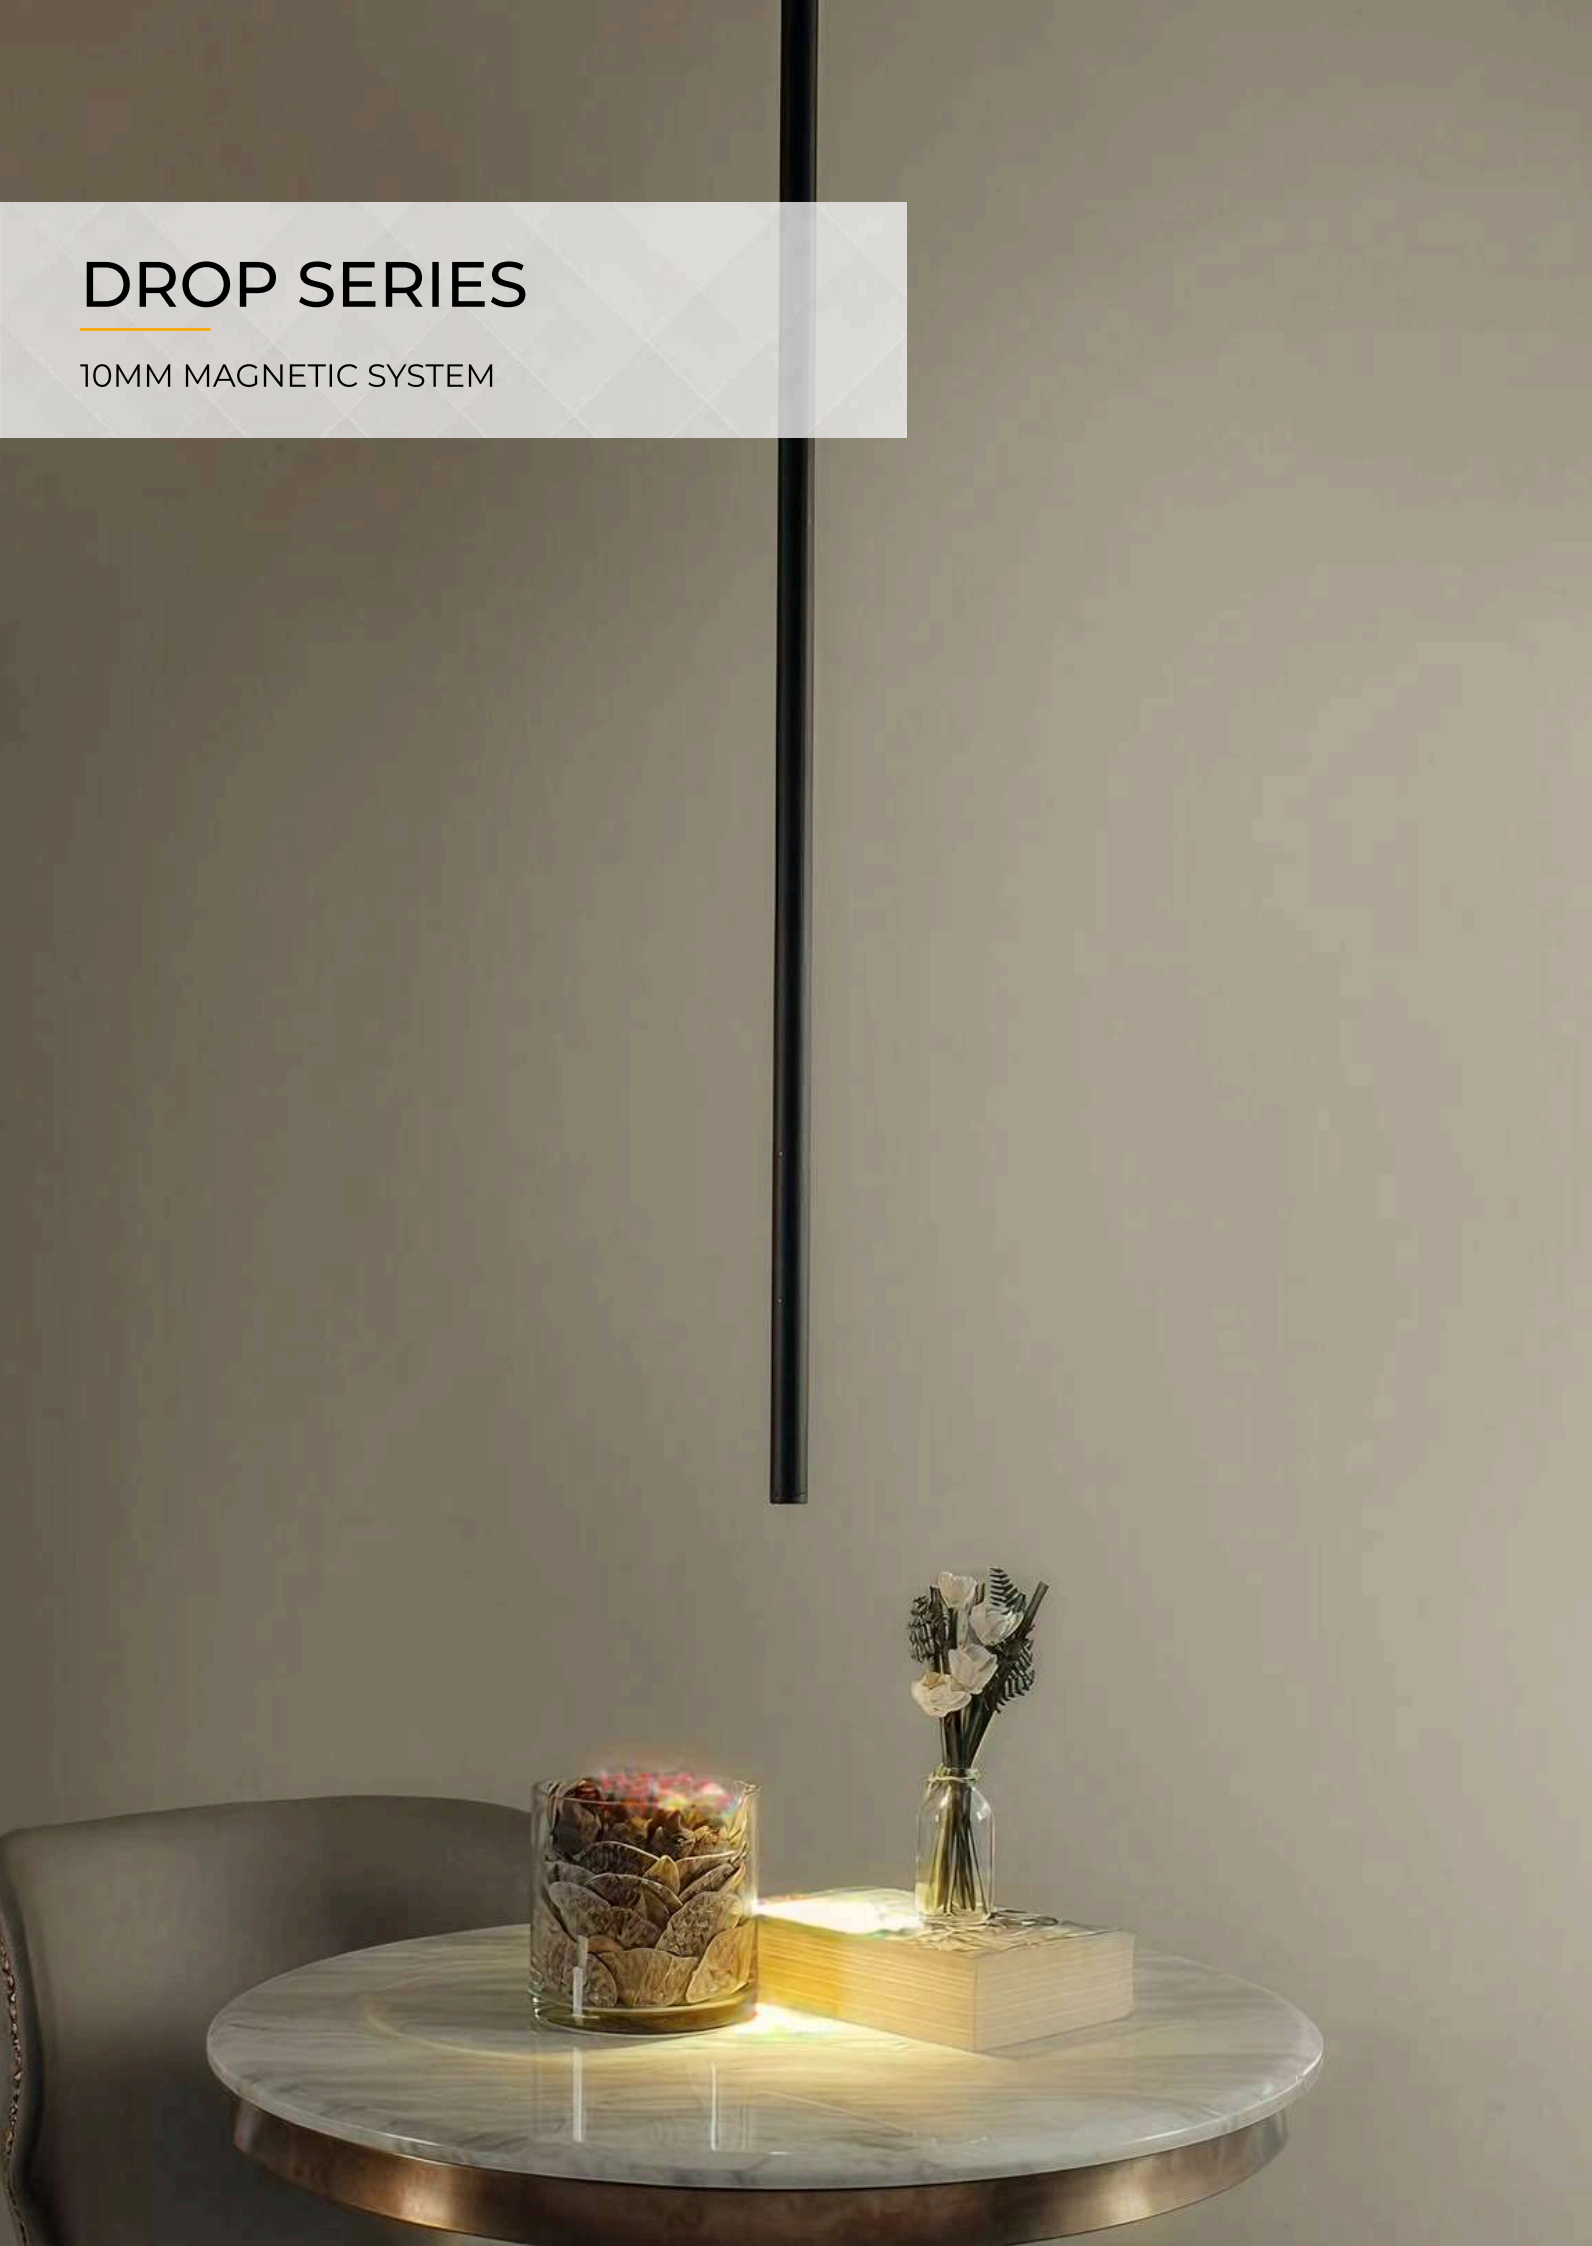




10MM MG DROP 1850NR.1.3.MB.MB.36.18.30G

Outer Size(mm) : Dia 18x510(H)
Wattage : 3W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	DC 48V	CRI	>90
PRODUCT FINISH	Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt Black	BEAM ANGLE	36°
IP RATING	IP 20	DIMMABLE	Dali (on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000k, 4000k

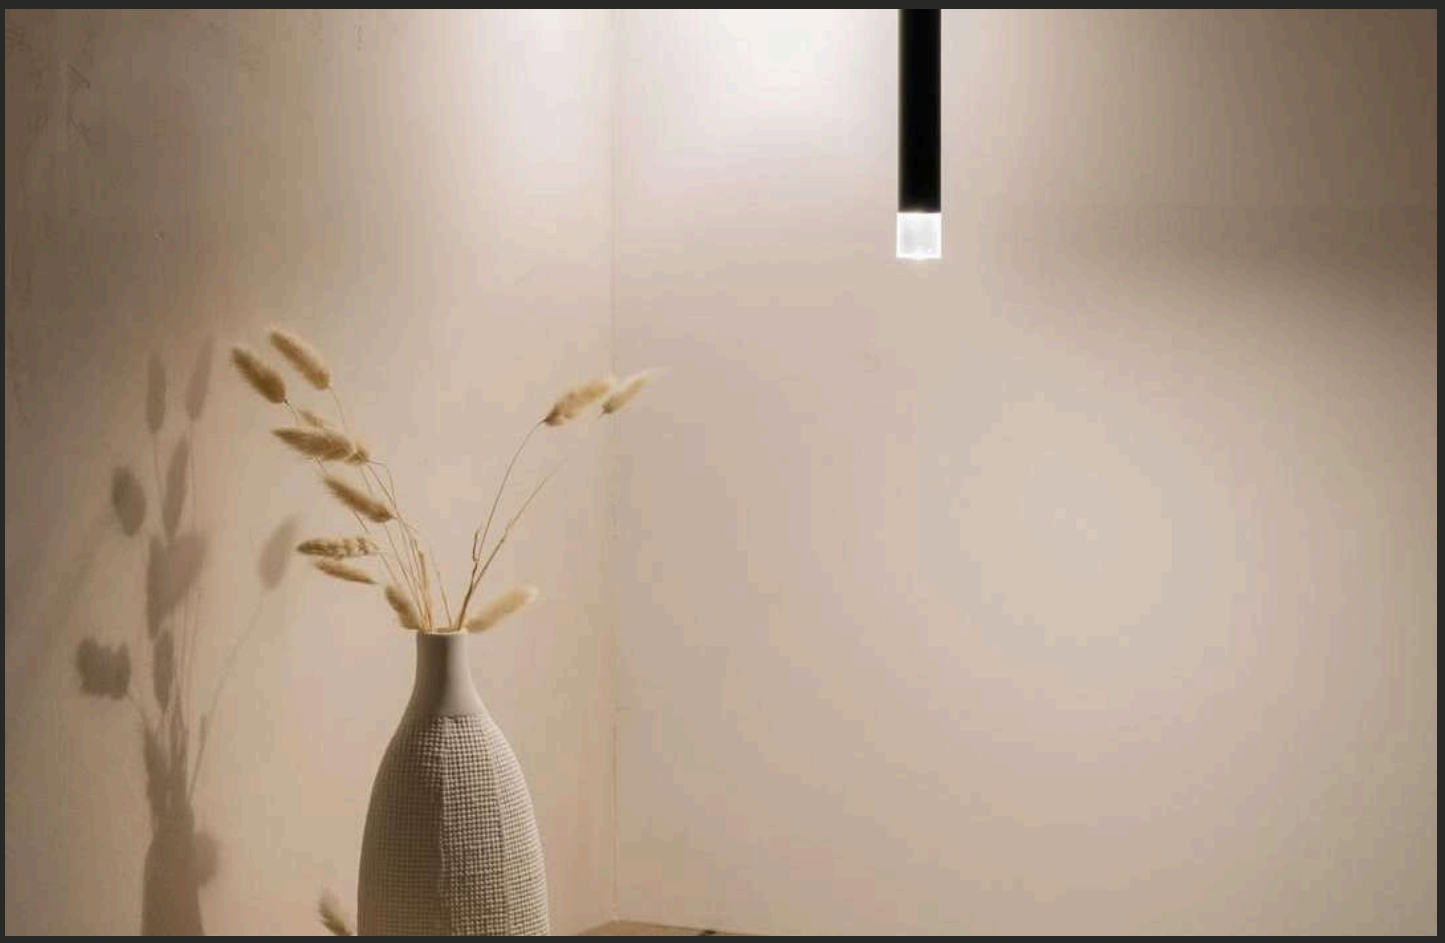


BUBBLE SERIES

10MM MAGNETIC SYSTEM







10MM MG BUBBLE 263200A2.1.8.MB.MB.360.200.30G

Outer Size(mm) : Dia 200
Wattage : 8W


PRODUCT PROPERTIES


LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	DC 48V	CRI	>90
PRODUCT FINISH	Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt Black	BEAM ANGLE	360°
IP RATING	IP 20	DIMMABLE	Dali (on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000k, 4000k



LOOP SERIES

10MM MAGNETIC SYSTEM

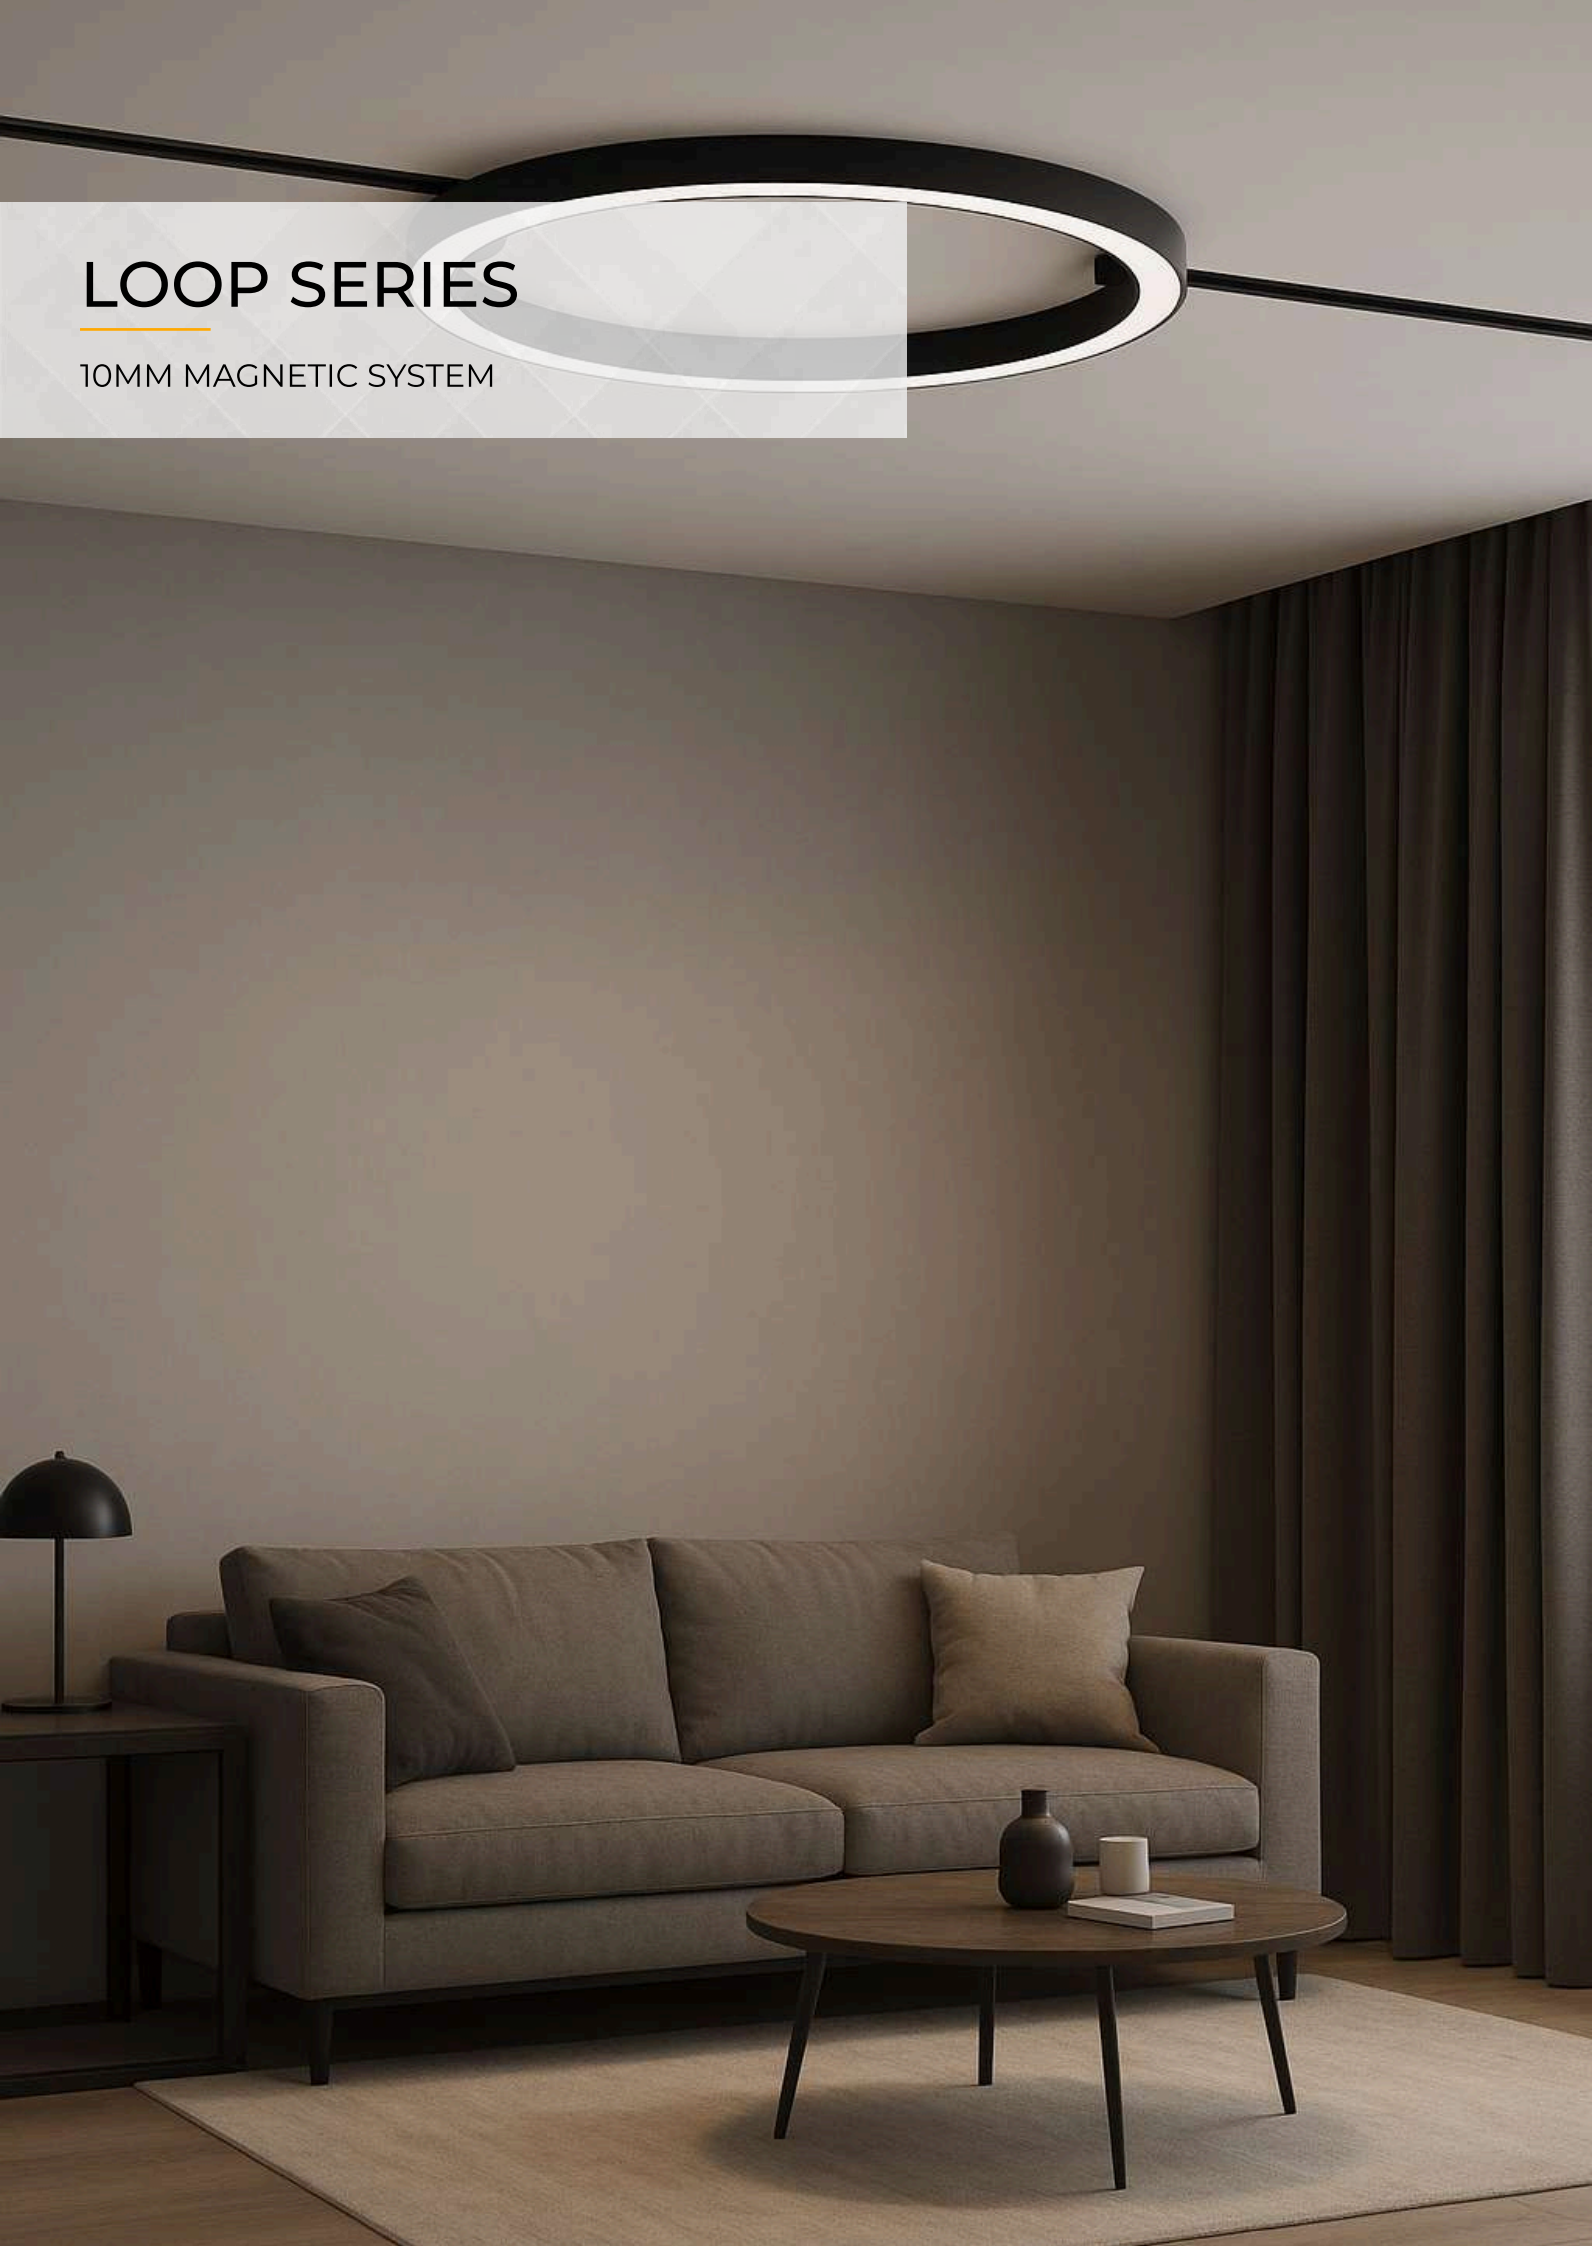

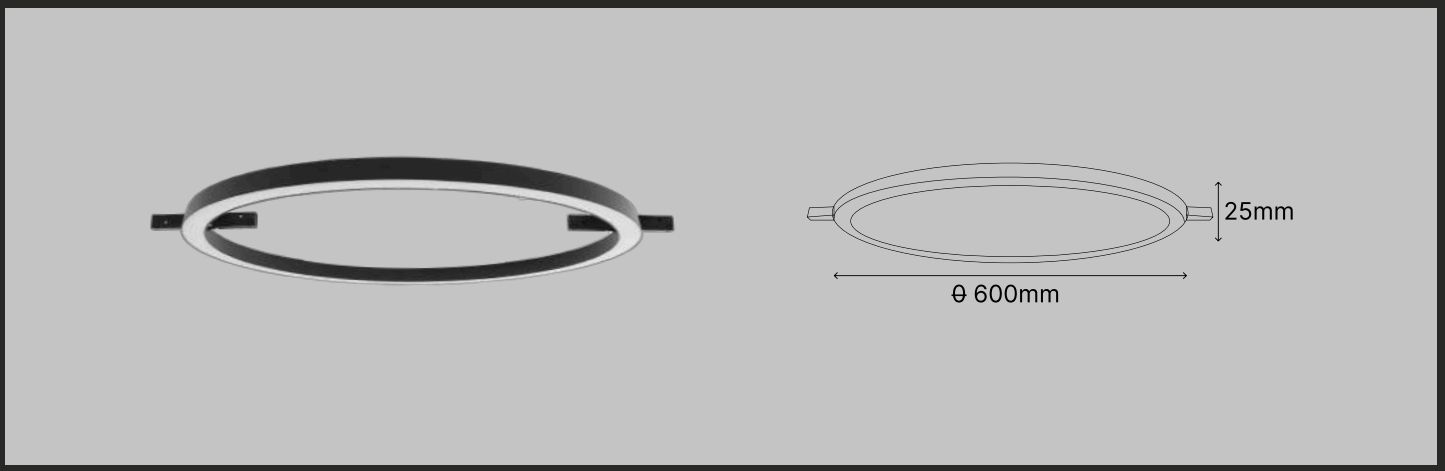

10MM MG LOOP 263600A4.1.23.MB.MB.100.600.30G

Outer Size(mm) : Dia 600x25(H)
Wattage : 23W


PRODUCT PROPERTIES


LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	DC 48V	CRI	>80
PRODUCT FINISH	Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt Black	BEAM ANGLE	100°
IP RATING	IP 20	DIMMABLE	Dali (on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000k, 4000k



BEELINE


LINEAR SYSTEMS

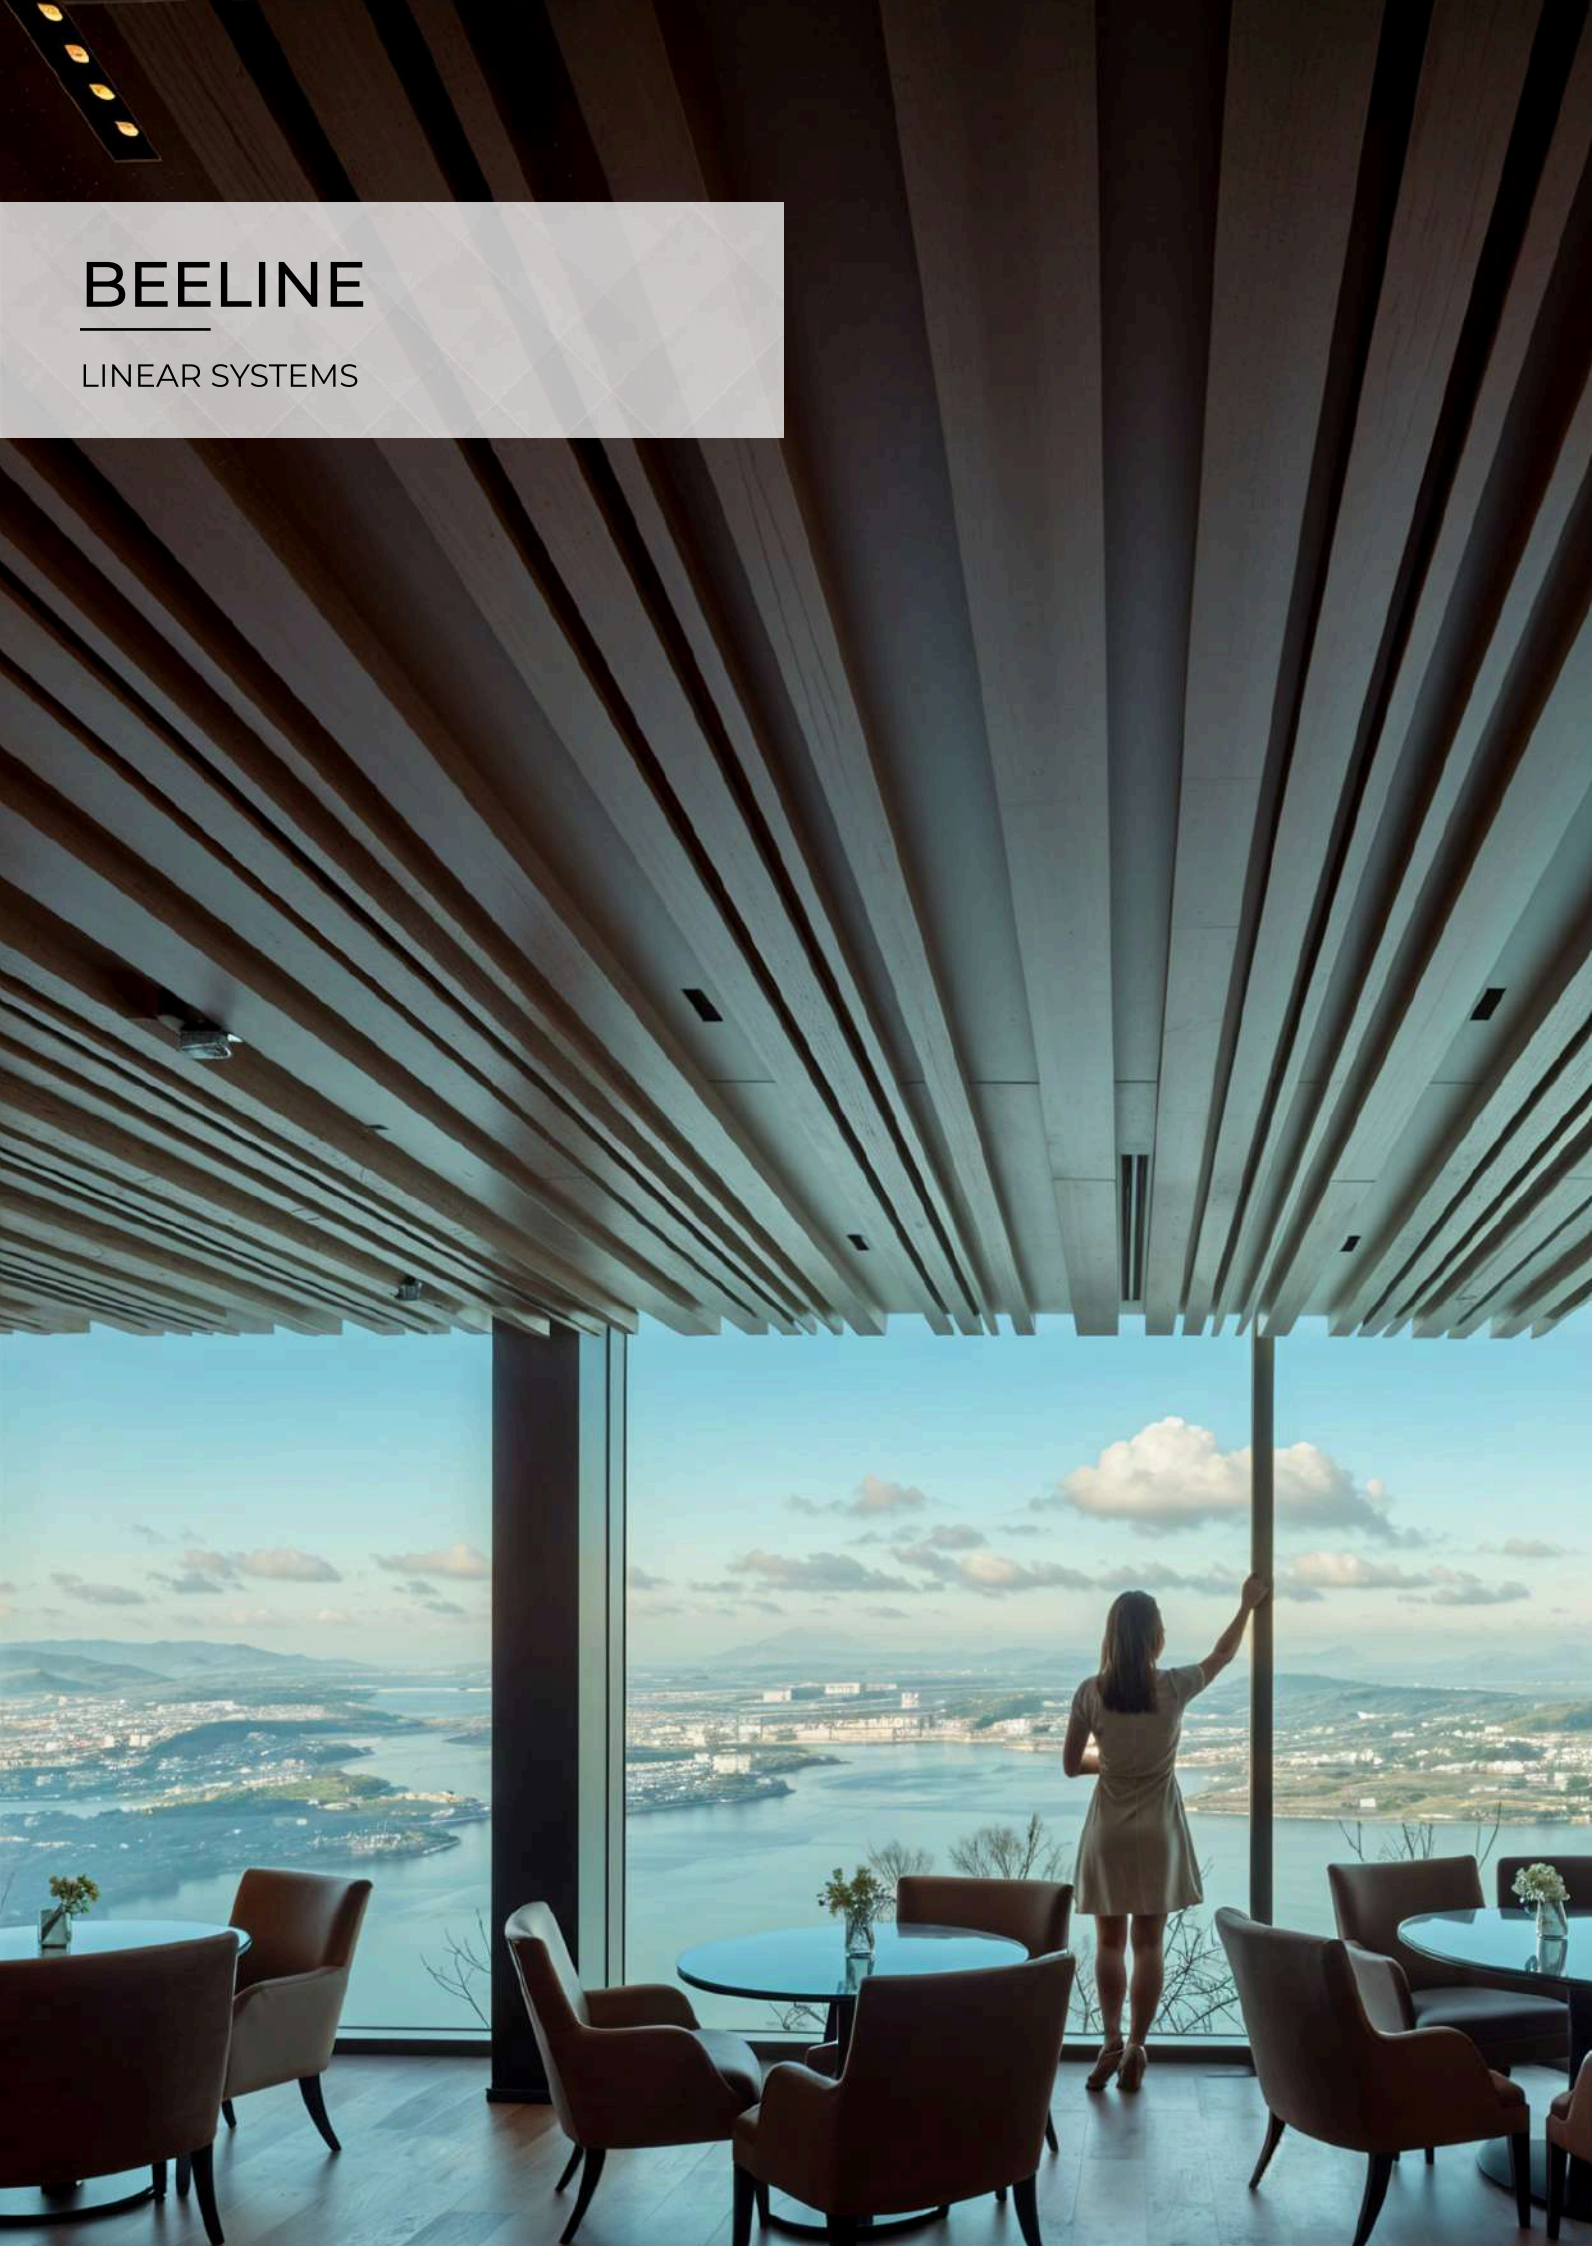

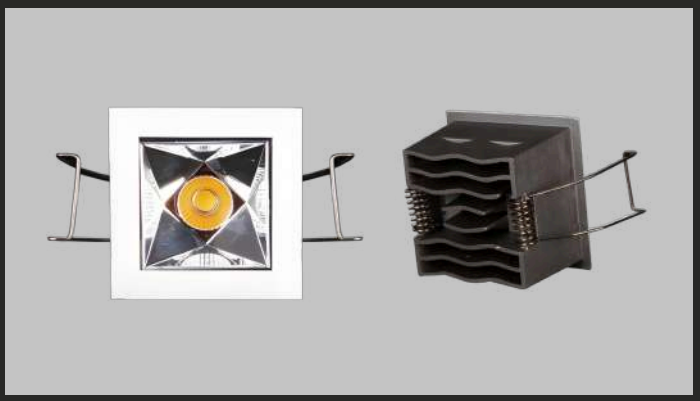


BENE.1.3.MW.CHR.30.3535.30G

Outer Size(mm) : 45(L)x45(W)x48(H)
Cut Out Size : 35x35mm
Wattage : 3W

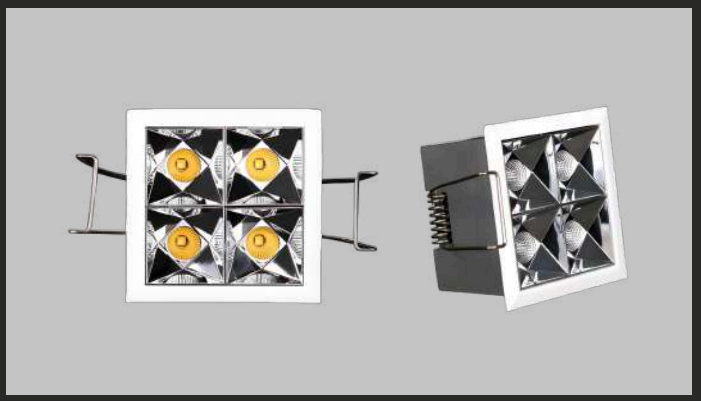


BENE.4.10.MW.CHR.30.7070.30G

Outer Size(mm) : 76(L)x76(W)x50(H)
Cut Out Size : 70x70mm
Wattage : 10W

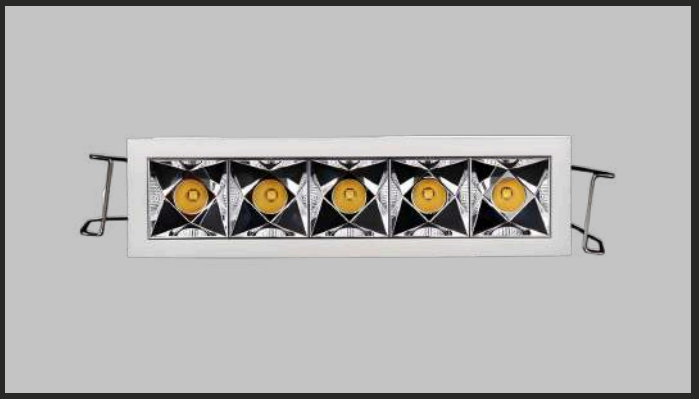


BENE.5.12.MW.CHR.30.16040.30G

Outer Size(mm) : 165.5(L)x45.5(W)x50(H)
Cut Out Size : 160x40mm
Wattage : 12W

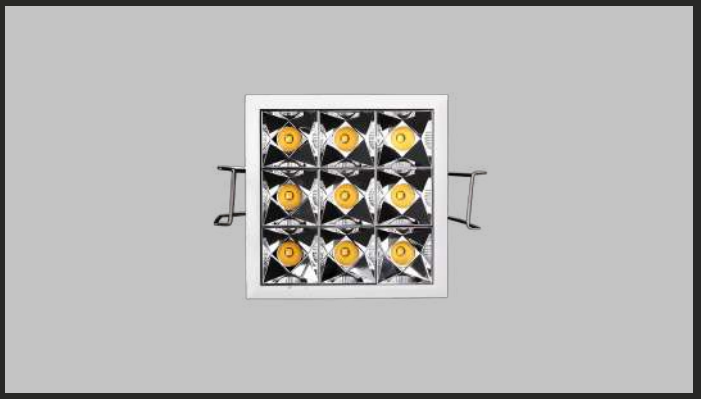

BENE.9.20.MW.CHR.30.100100.30G

Outer Size(mm) : 106(L)x106(W)x50(H)
Cut Out Size : 100x100mm
Wattage : 20W

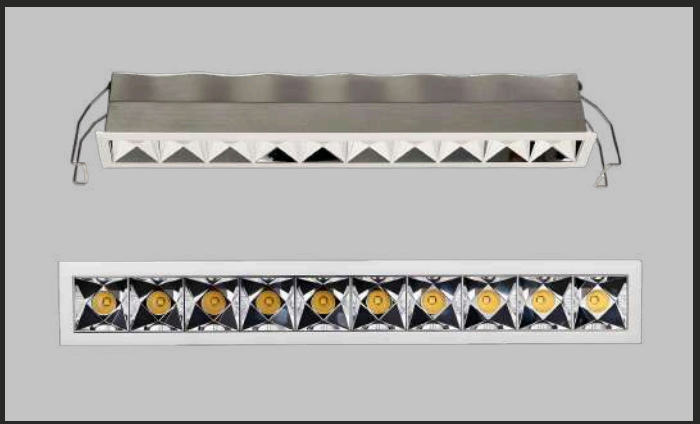

BENE.10.24.MW.CHR.30.31040.30G


Outer Size(mm) : 316(L)x45.5(W)x50(H)
Cut Out Size : 310x40mm
Wattage : 24W


BEELINE SERIES

LED	Osram
INPUT VOLTAGE	220-240V ac
PRODUCT FINISH	Matt White / Matt Black
REFLECTOR FINISH	Chrome
IP RATING	IP 20
OPERATING TEMPERATURE	0-50°c
HOUSING MATERIAL	Aluminium Die Cast
CRI	>90
SWIVEL/FIXED	Fixed
BEAM ANGLE	12°, 24°, 30°, 34°, 48°, 55°x55°, 40°x65°
DRIVER BRAND	Osram
DIMMABLE	Triac / Analogue / Dali (on request)
CCT	3000k, 4000k

BEELINE WALL WASHER

LINEAR SYSTEMS

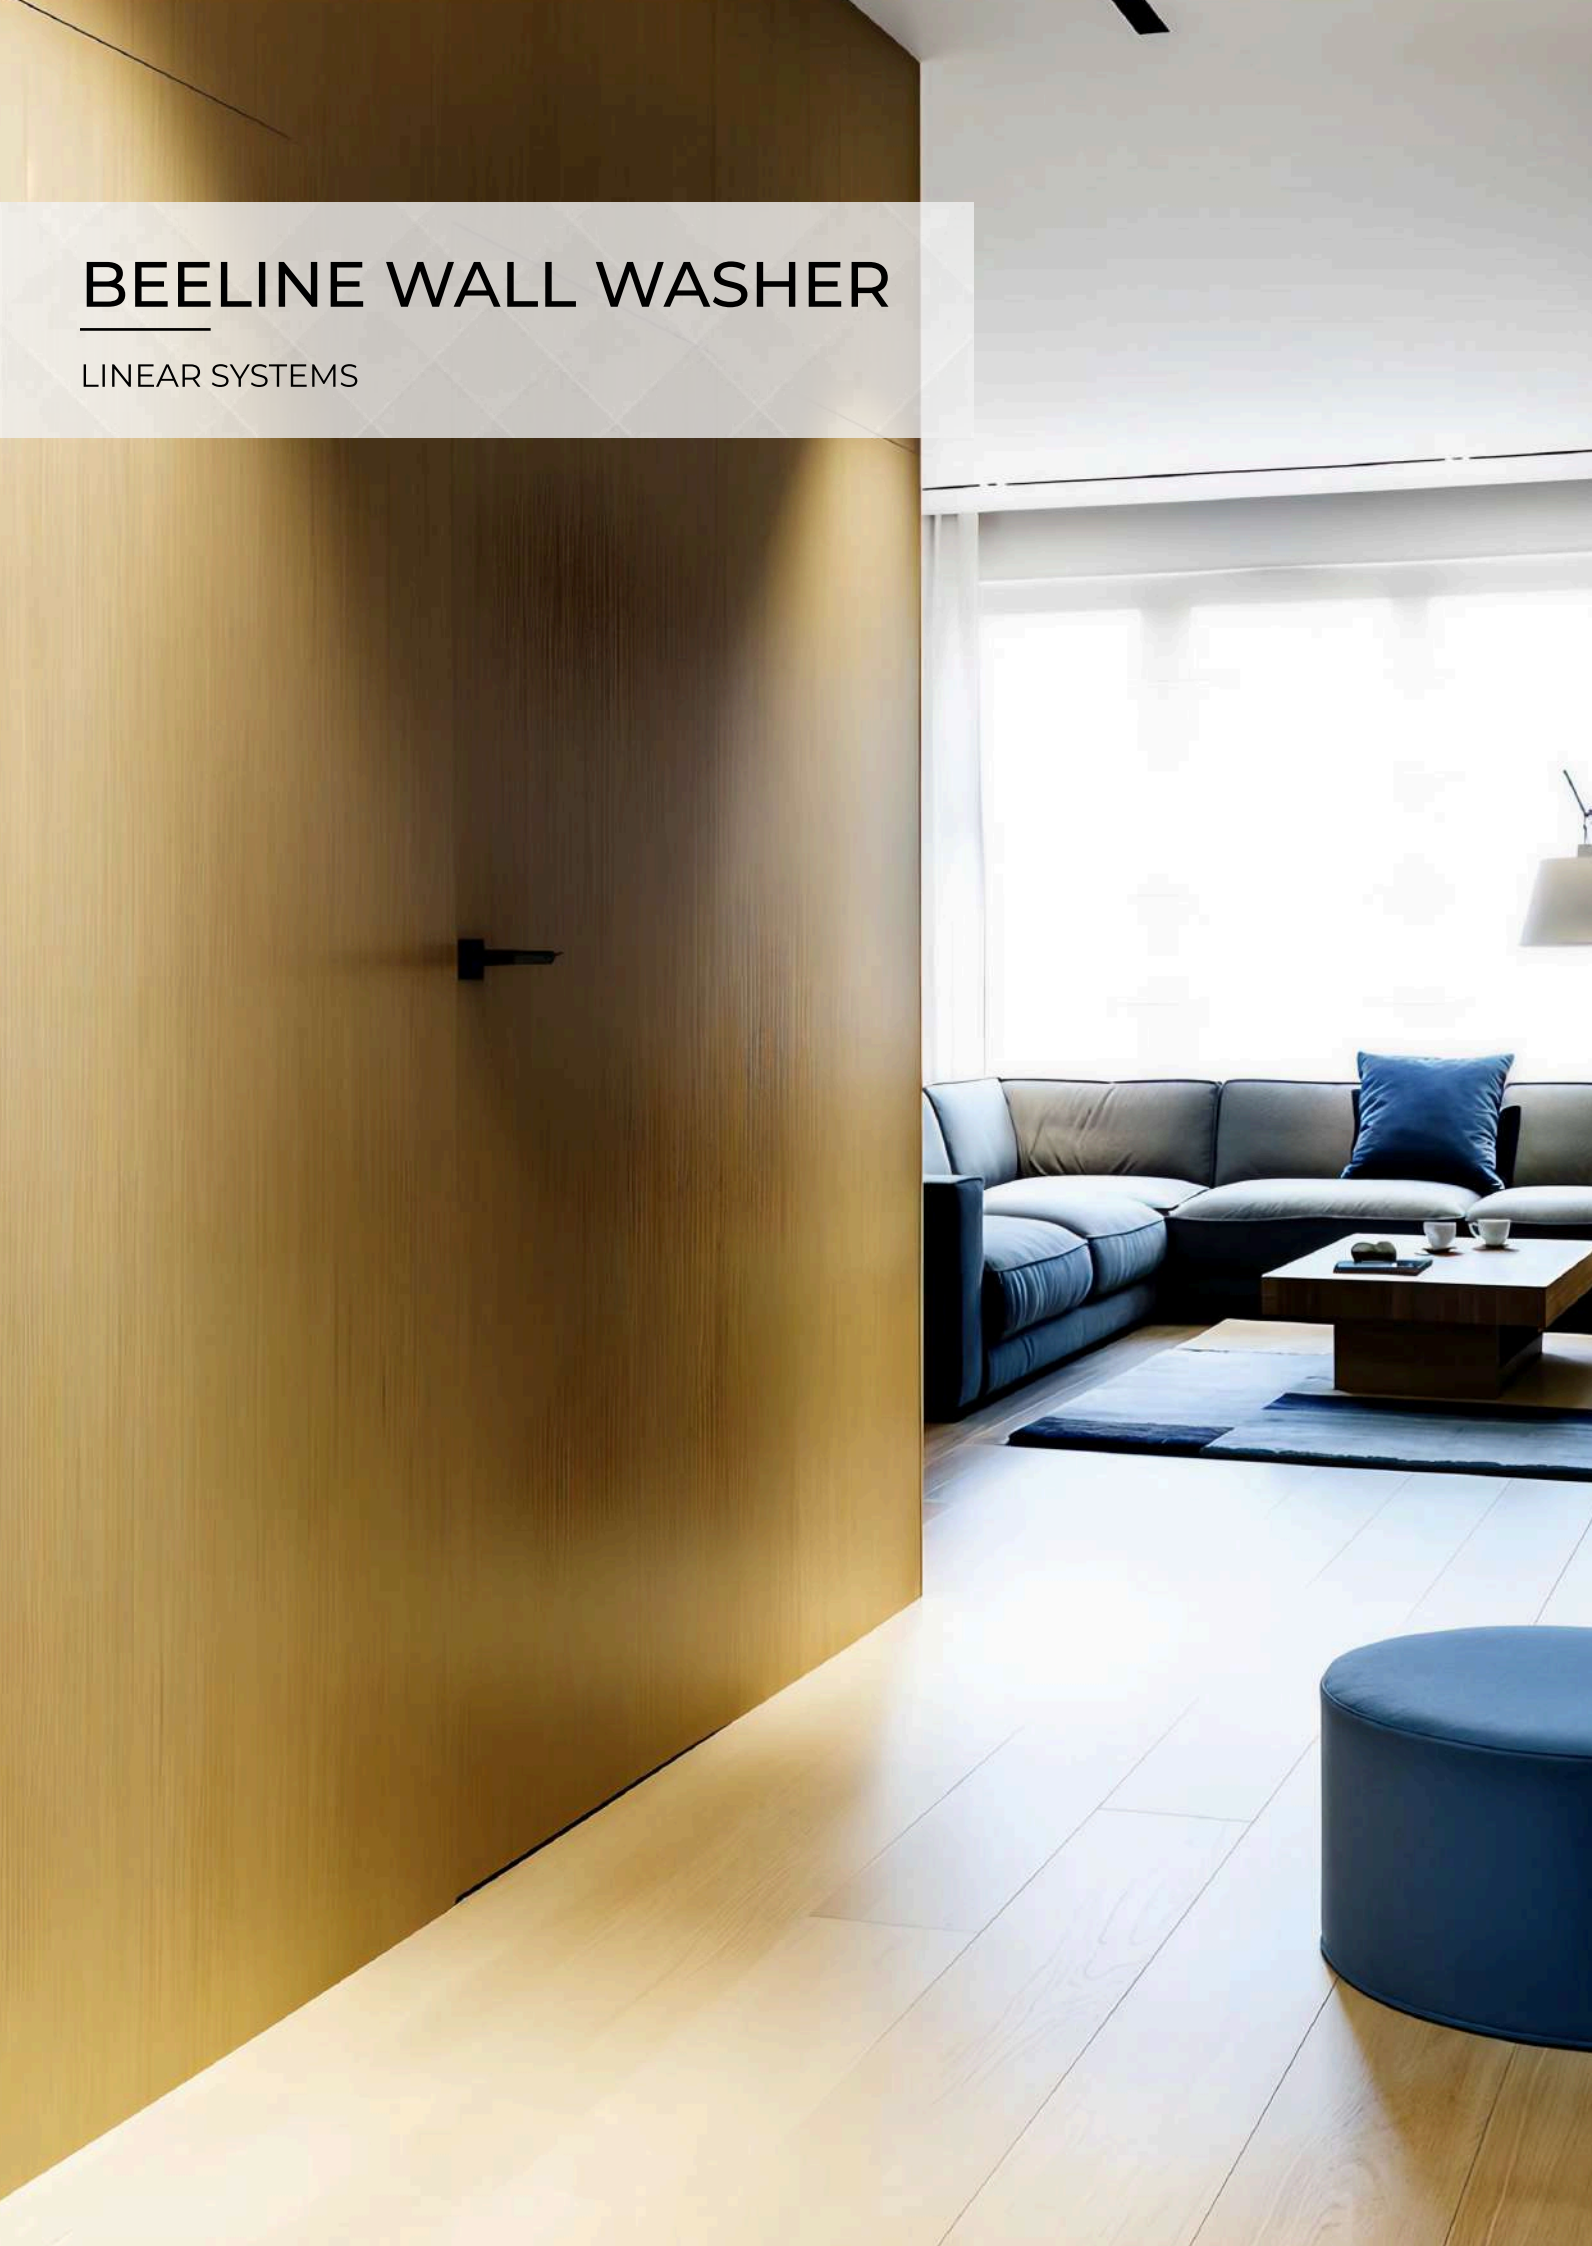

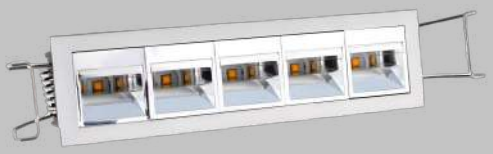





BENEWW.5.12.MW.CHR.WW.16040.30G

Outer Size(mm) : 165.5(L)x45.5(W)x50(H)
Cut Out Size : 160x40mm
Wattage : 12W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Chrome	BEAM ANGLE	Wall Wash
IP RATING	IP 20	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac / Analogue / Dali (on request)
		CCT	3000k, 4000k

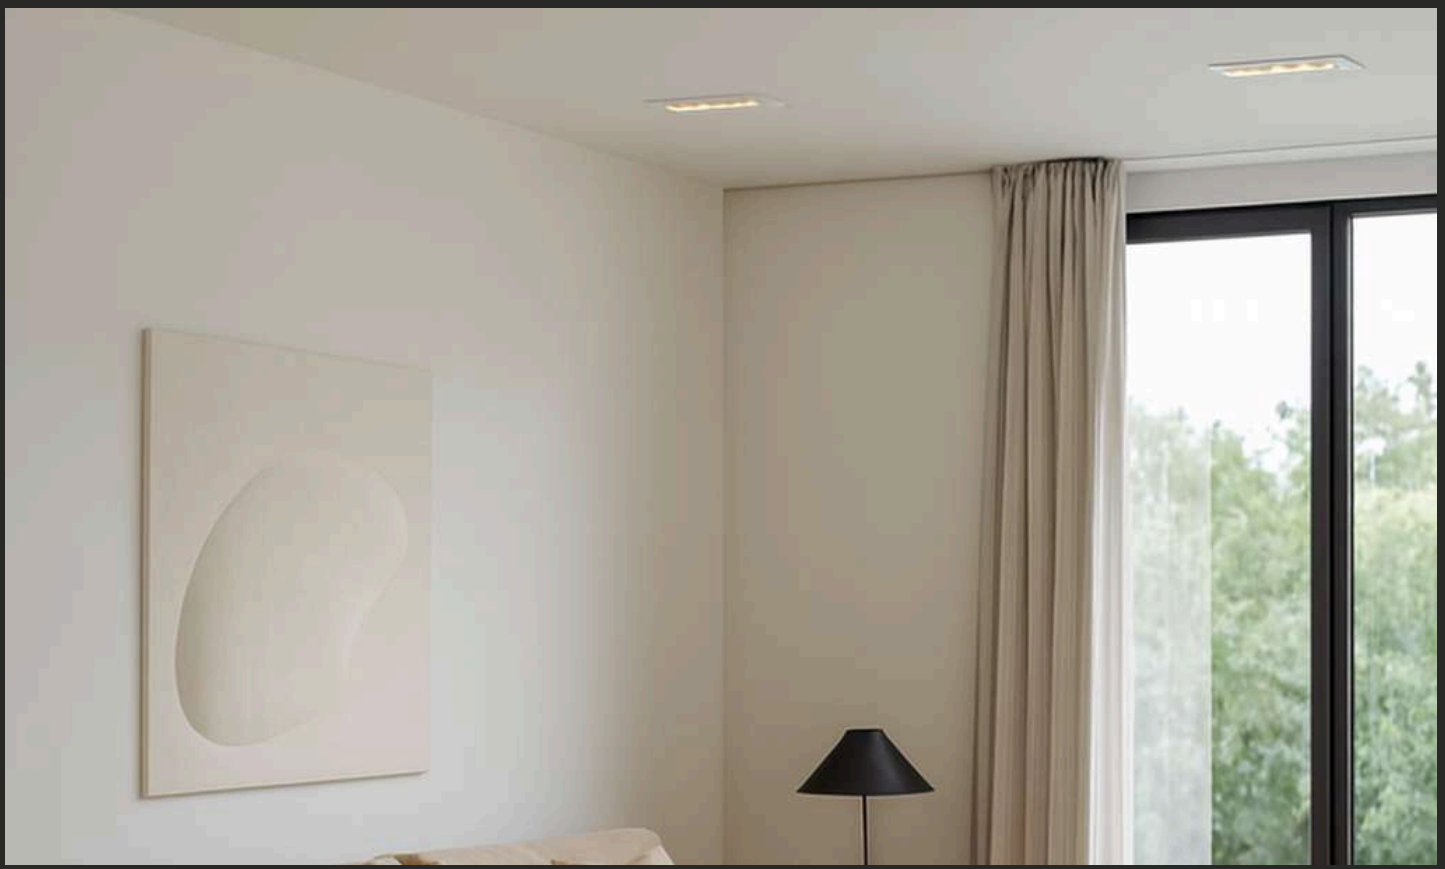

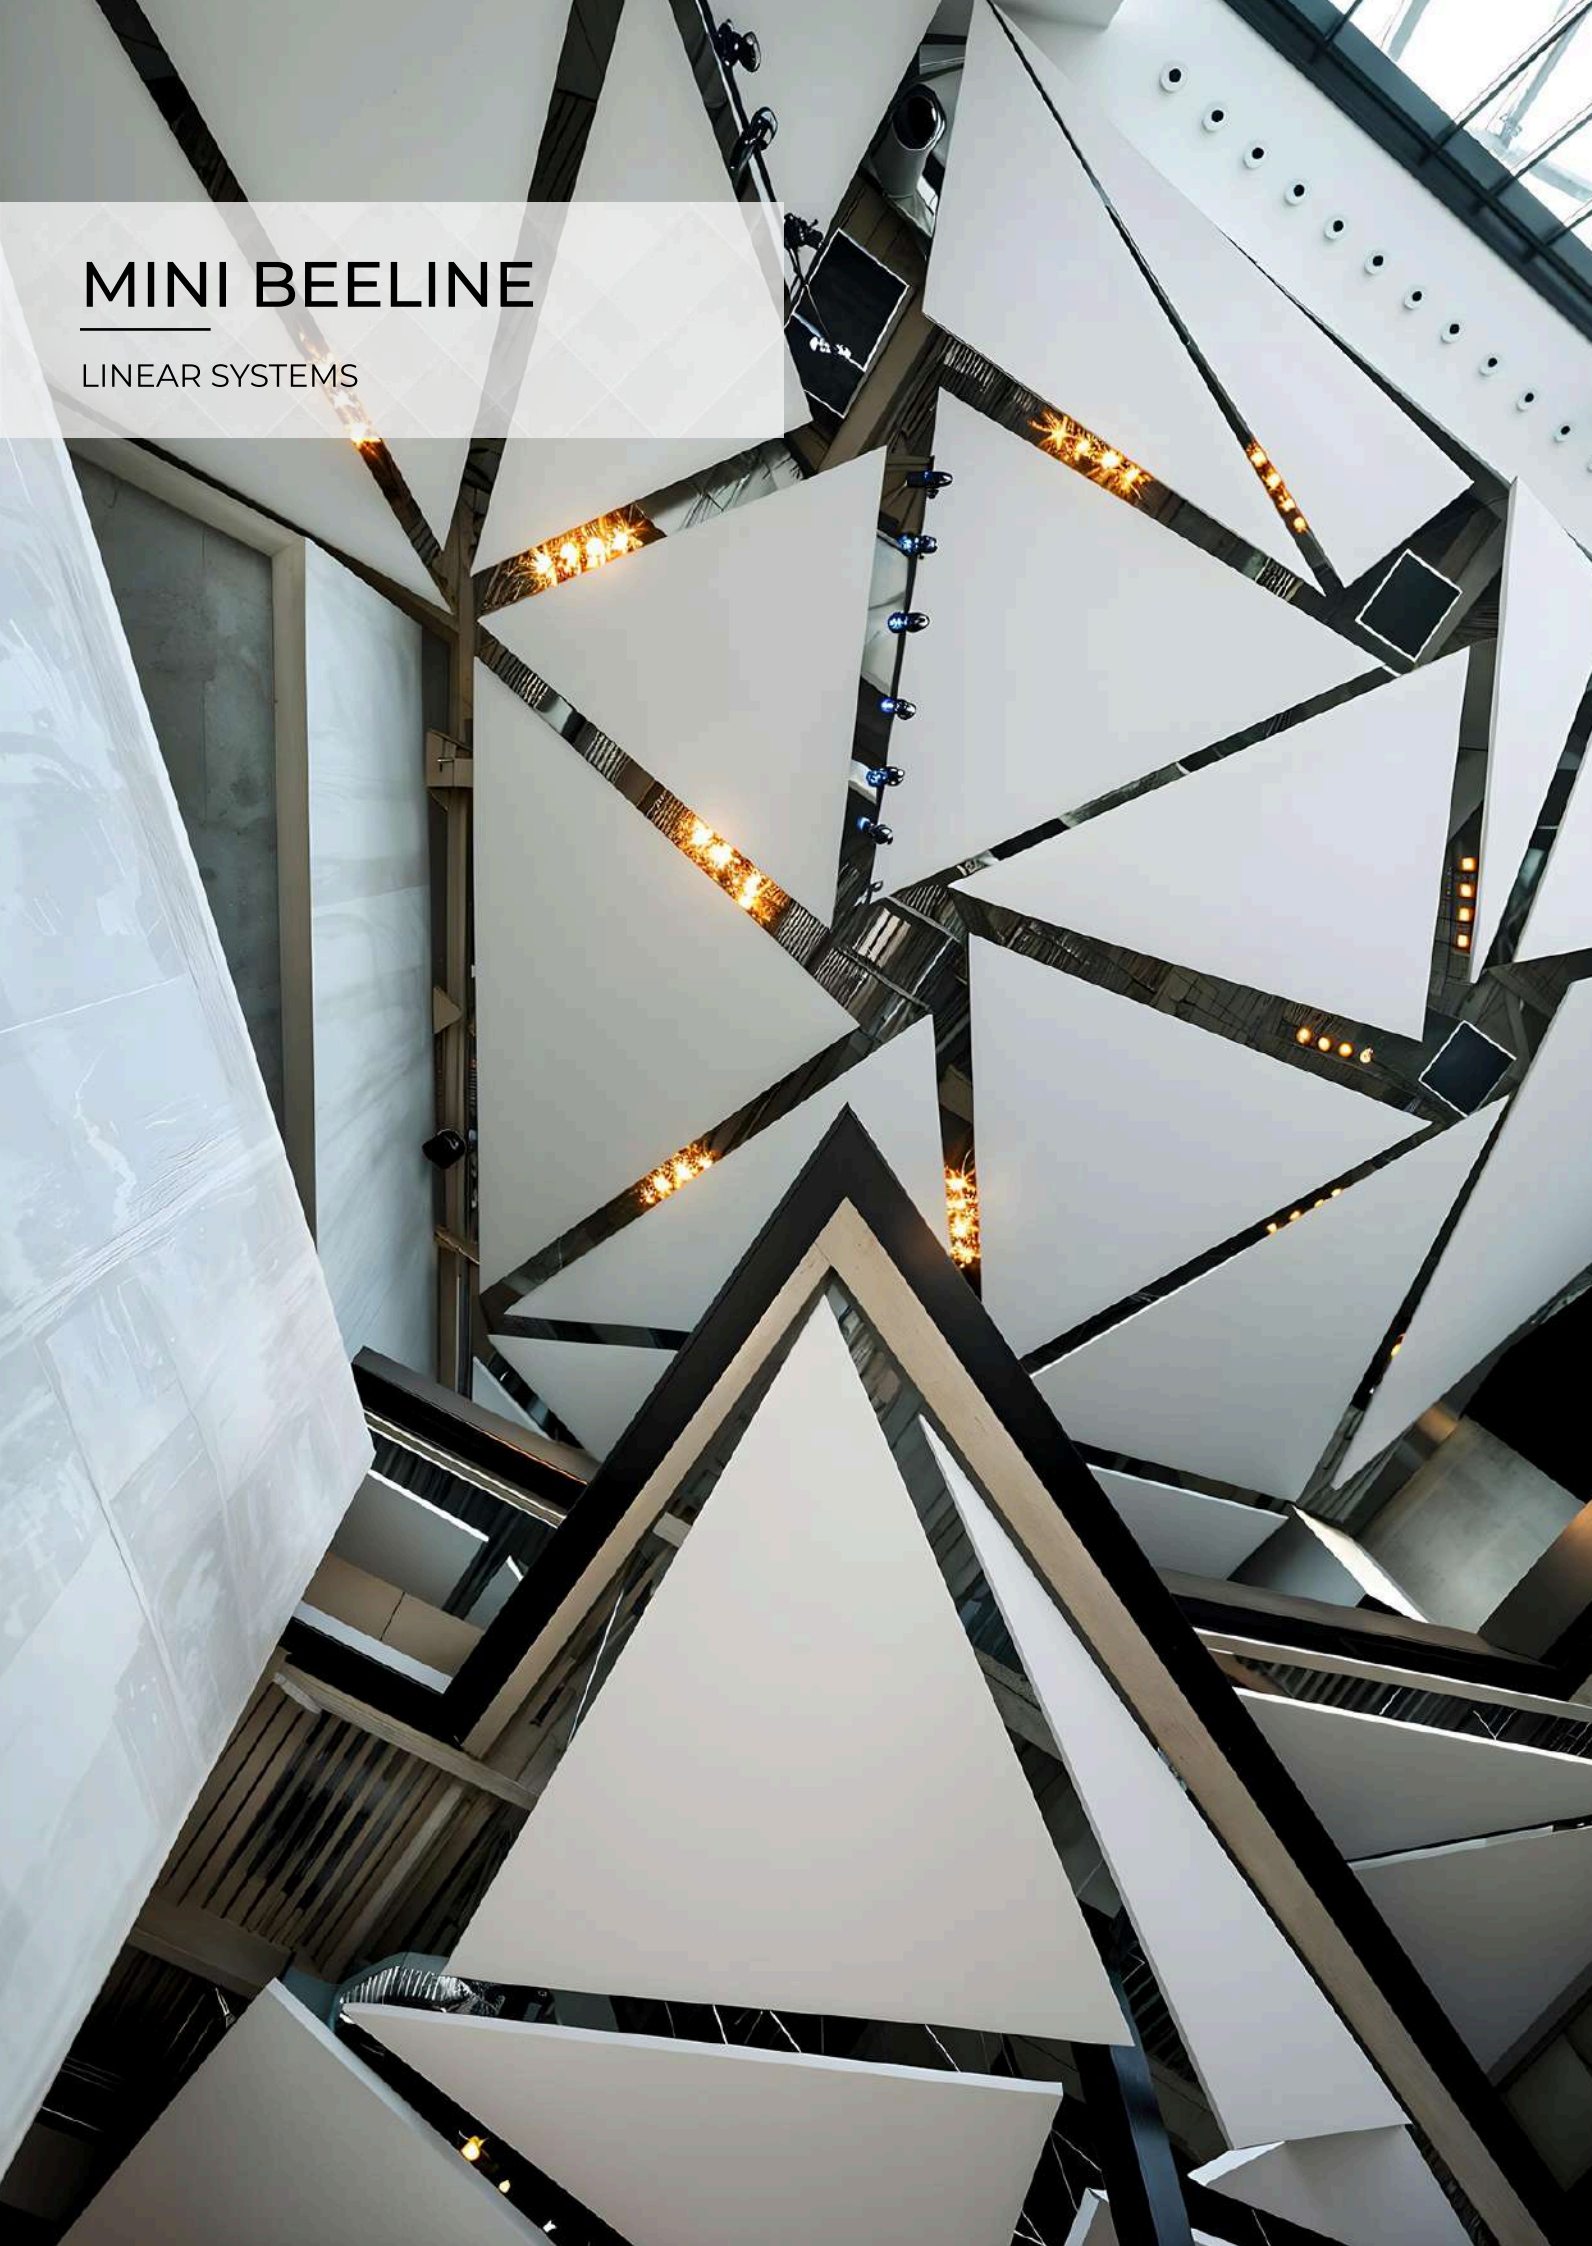


MINI BEELINE

LINEAR SYSTEMS




MIBENE.3.6.MW.MB.30.5727.30G

Outer Size(mm) : 62(L)x32(W)x40(H)
Cut Out Size : 57x27.5mm
Wattage : 6W

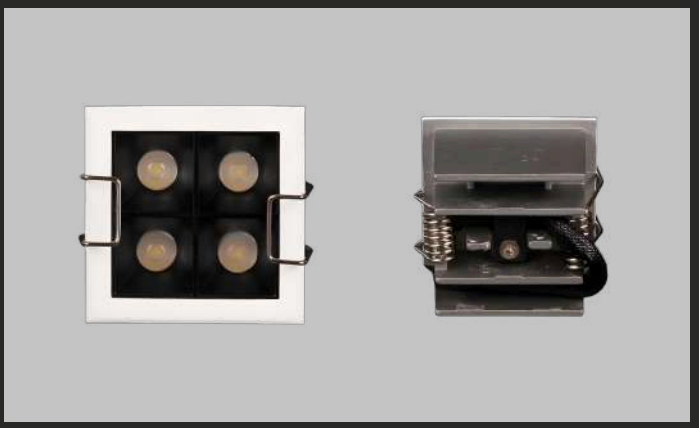

MIBENE.4.6.MW.MB.30.4848.30G

Outer Size(mm) : 52(L)x52(W)x40(H)
Cut Out Size : 48x48mm
Wattage : 6W

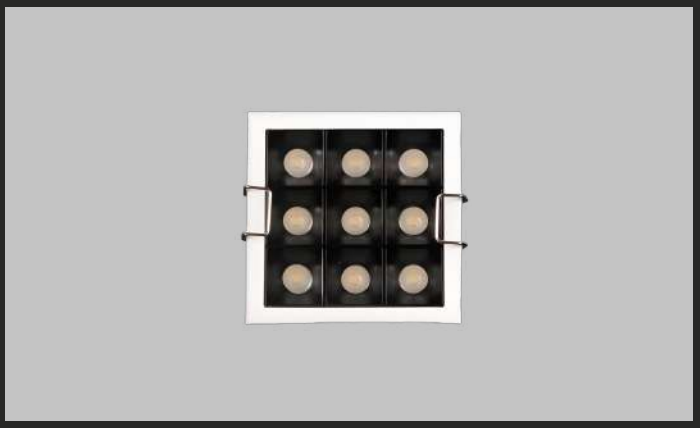


MIBENE.9.12.MW.MB.30.6868.30G

Outer Size(mm) : 71(L)x71(W)x40(H)
Cut Out Size : 68x68mm
Wattage : 12W



MIBENE.6.12.MW.MB.30.10427.30G

Outer Size(mm) : 109(L)x32(W)x40(H)
Cut Out Size : 104x27.5mm
Wattage : 12W

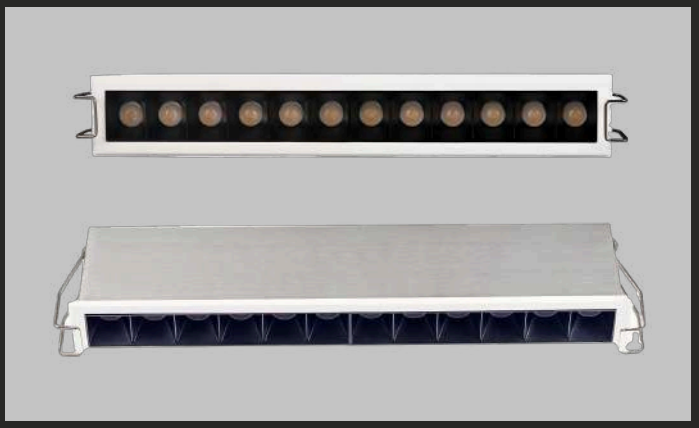

MIBENE.12.24.MW.MB.30.20027.30G


Outer Size(mm) : 205(L)x32(W)x40(H)
Cut Out Size : 200x27.5mm
Wattage : 24W

PRODUCT PROPERTIES

LED	Osram
INPUT VOLTAGE	220-240V ac
PRODUCT FINISH	Matt White / Matt Black
REFLECTOR FINISH	Matt Black
IP RATING	IP 20
OPERATING TEMPERATURE	0-50°c
HOUSING MATERIAL	Aluminium Die Cast
CRI	>90
SWIVEL/FIXED	Fixed
BEAM ANGLE	30°
DRIVER BRAND	Osram
DIMMABLE	Triac / Analogue / Dali (on request)
CCT	3000k

BEETLE

LINEAR SYSTEMS

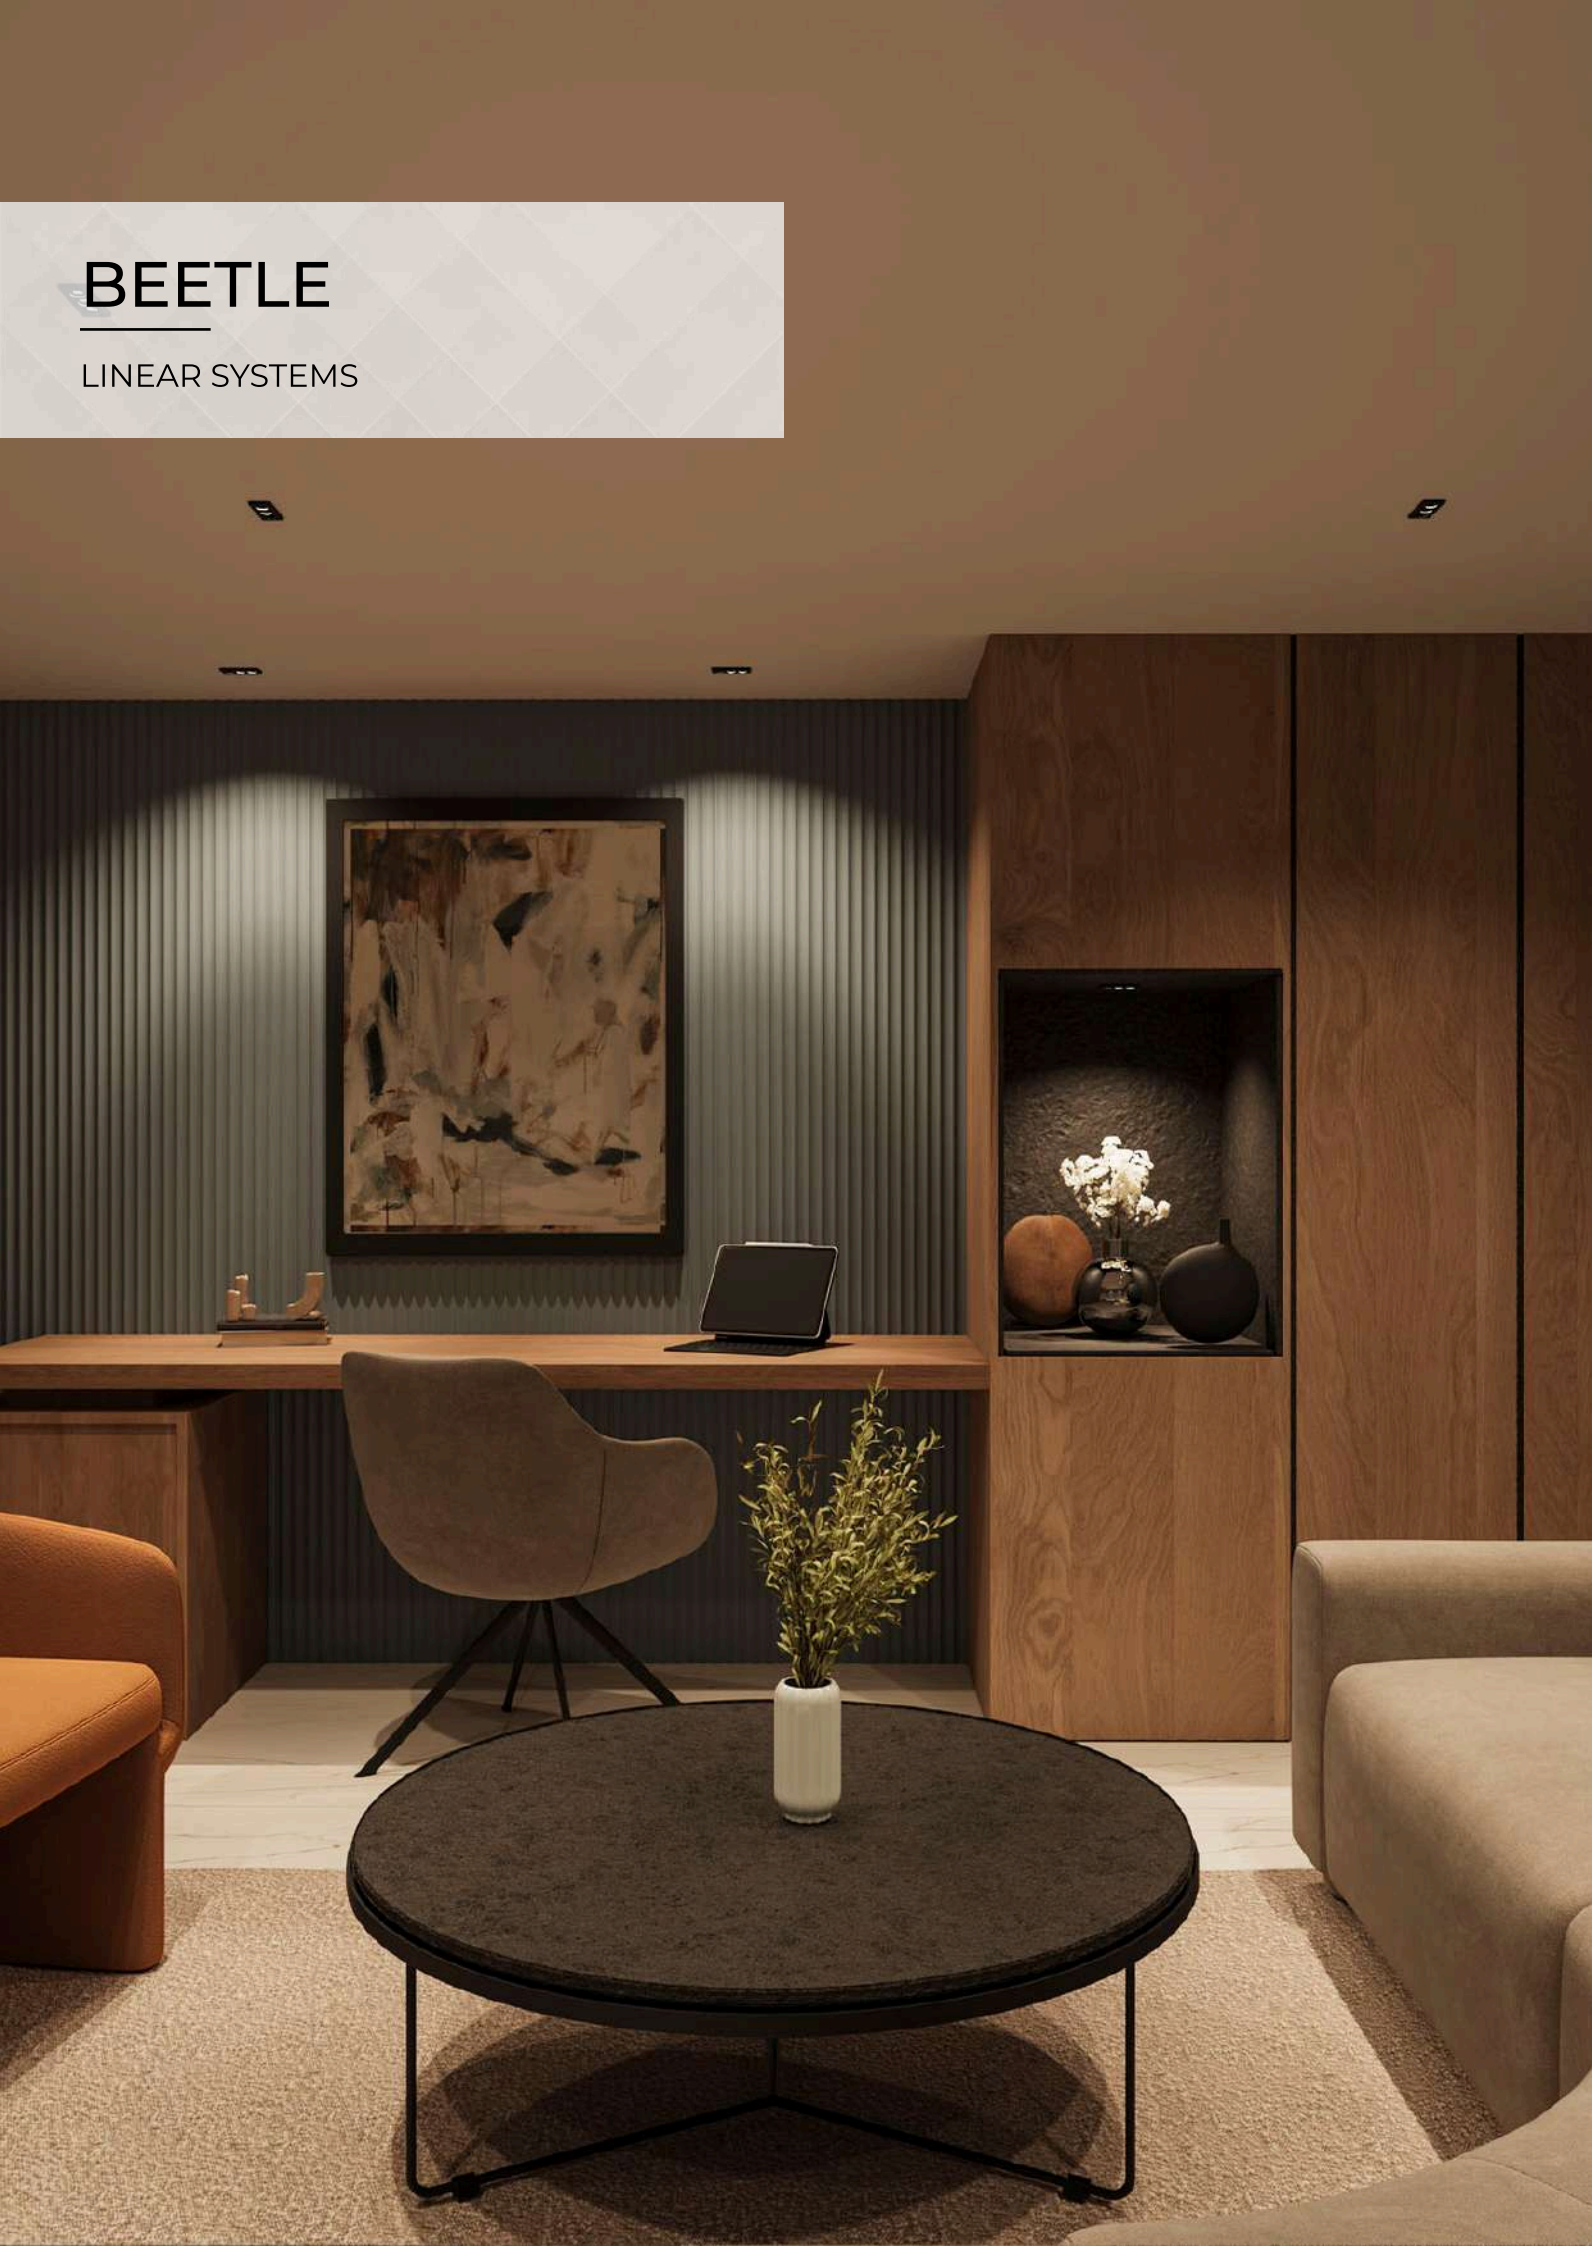




BEETLETRLS.1.12.MW.NI.30.14070.30G

Outer Size(mm) : 140(L)x35(W)x50(H)
Cut Out Size : 140x70mm
Wattage : 12W


PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt Black / Matt White	SWIVEL/FIXED	Fixed
REFLECTOR FINISH	Matt Black / Nickel	BEAM ANGLE	30°
IP RATING	IP 20	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac / Analogue / Dali (on request)
		CCT	3000k

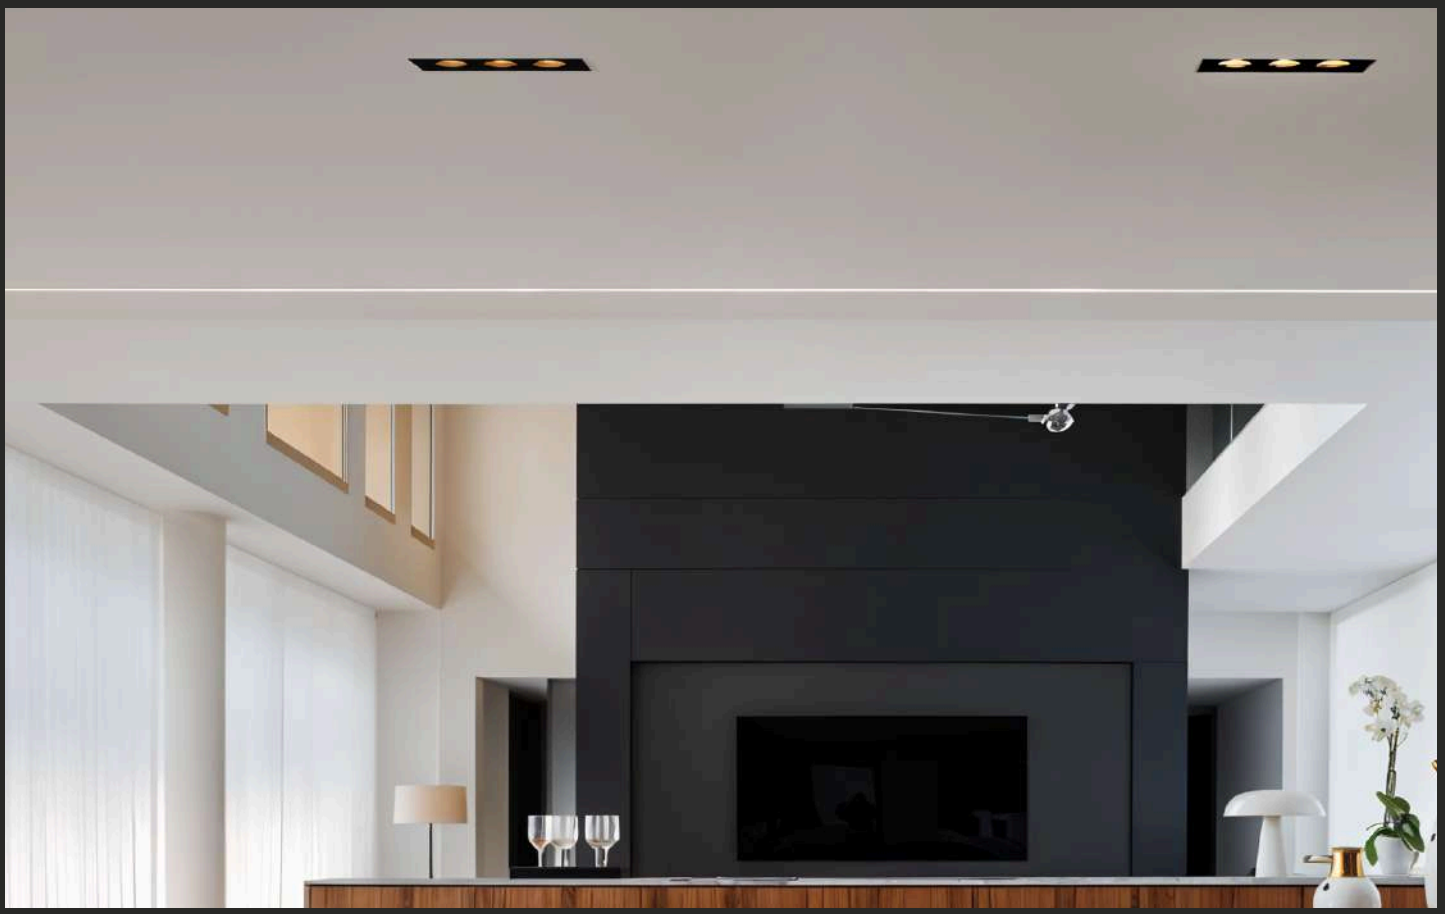

NIMBLE

COB SPOTLIGHT SYSTEMS

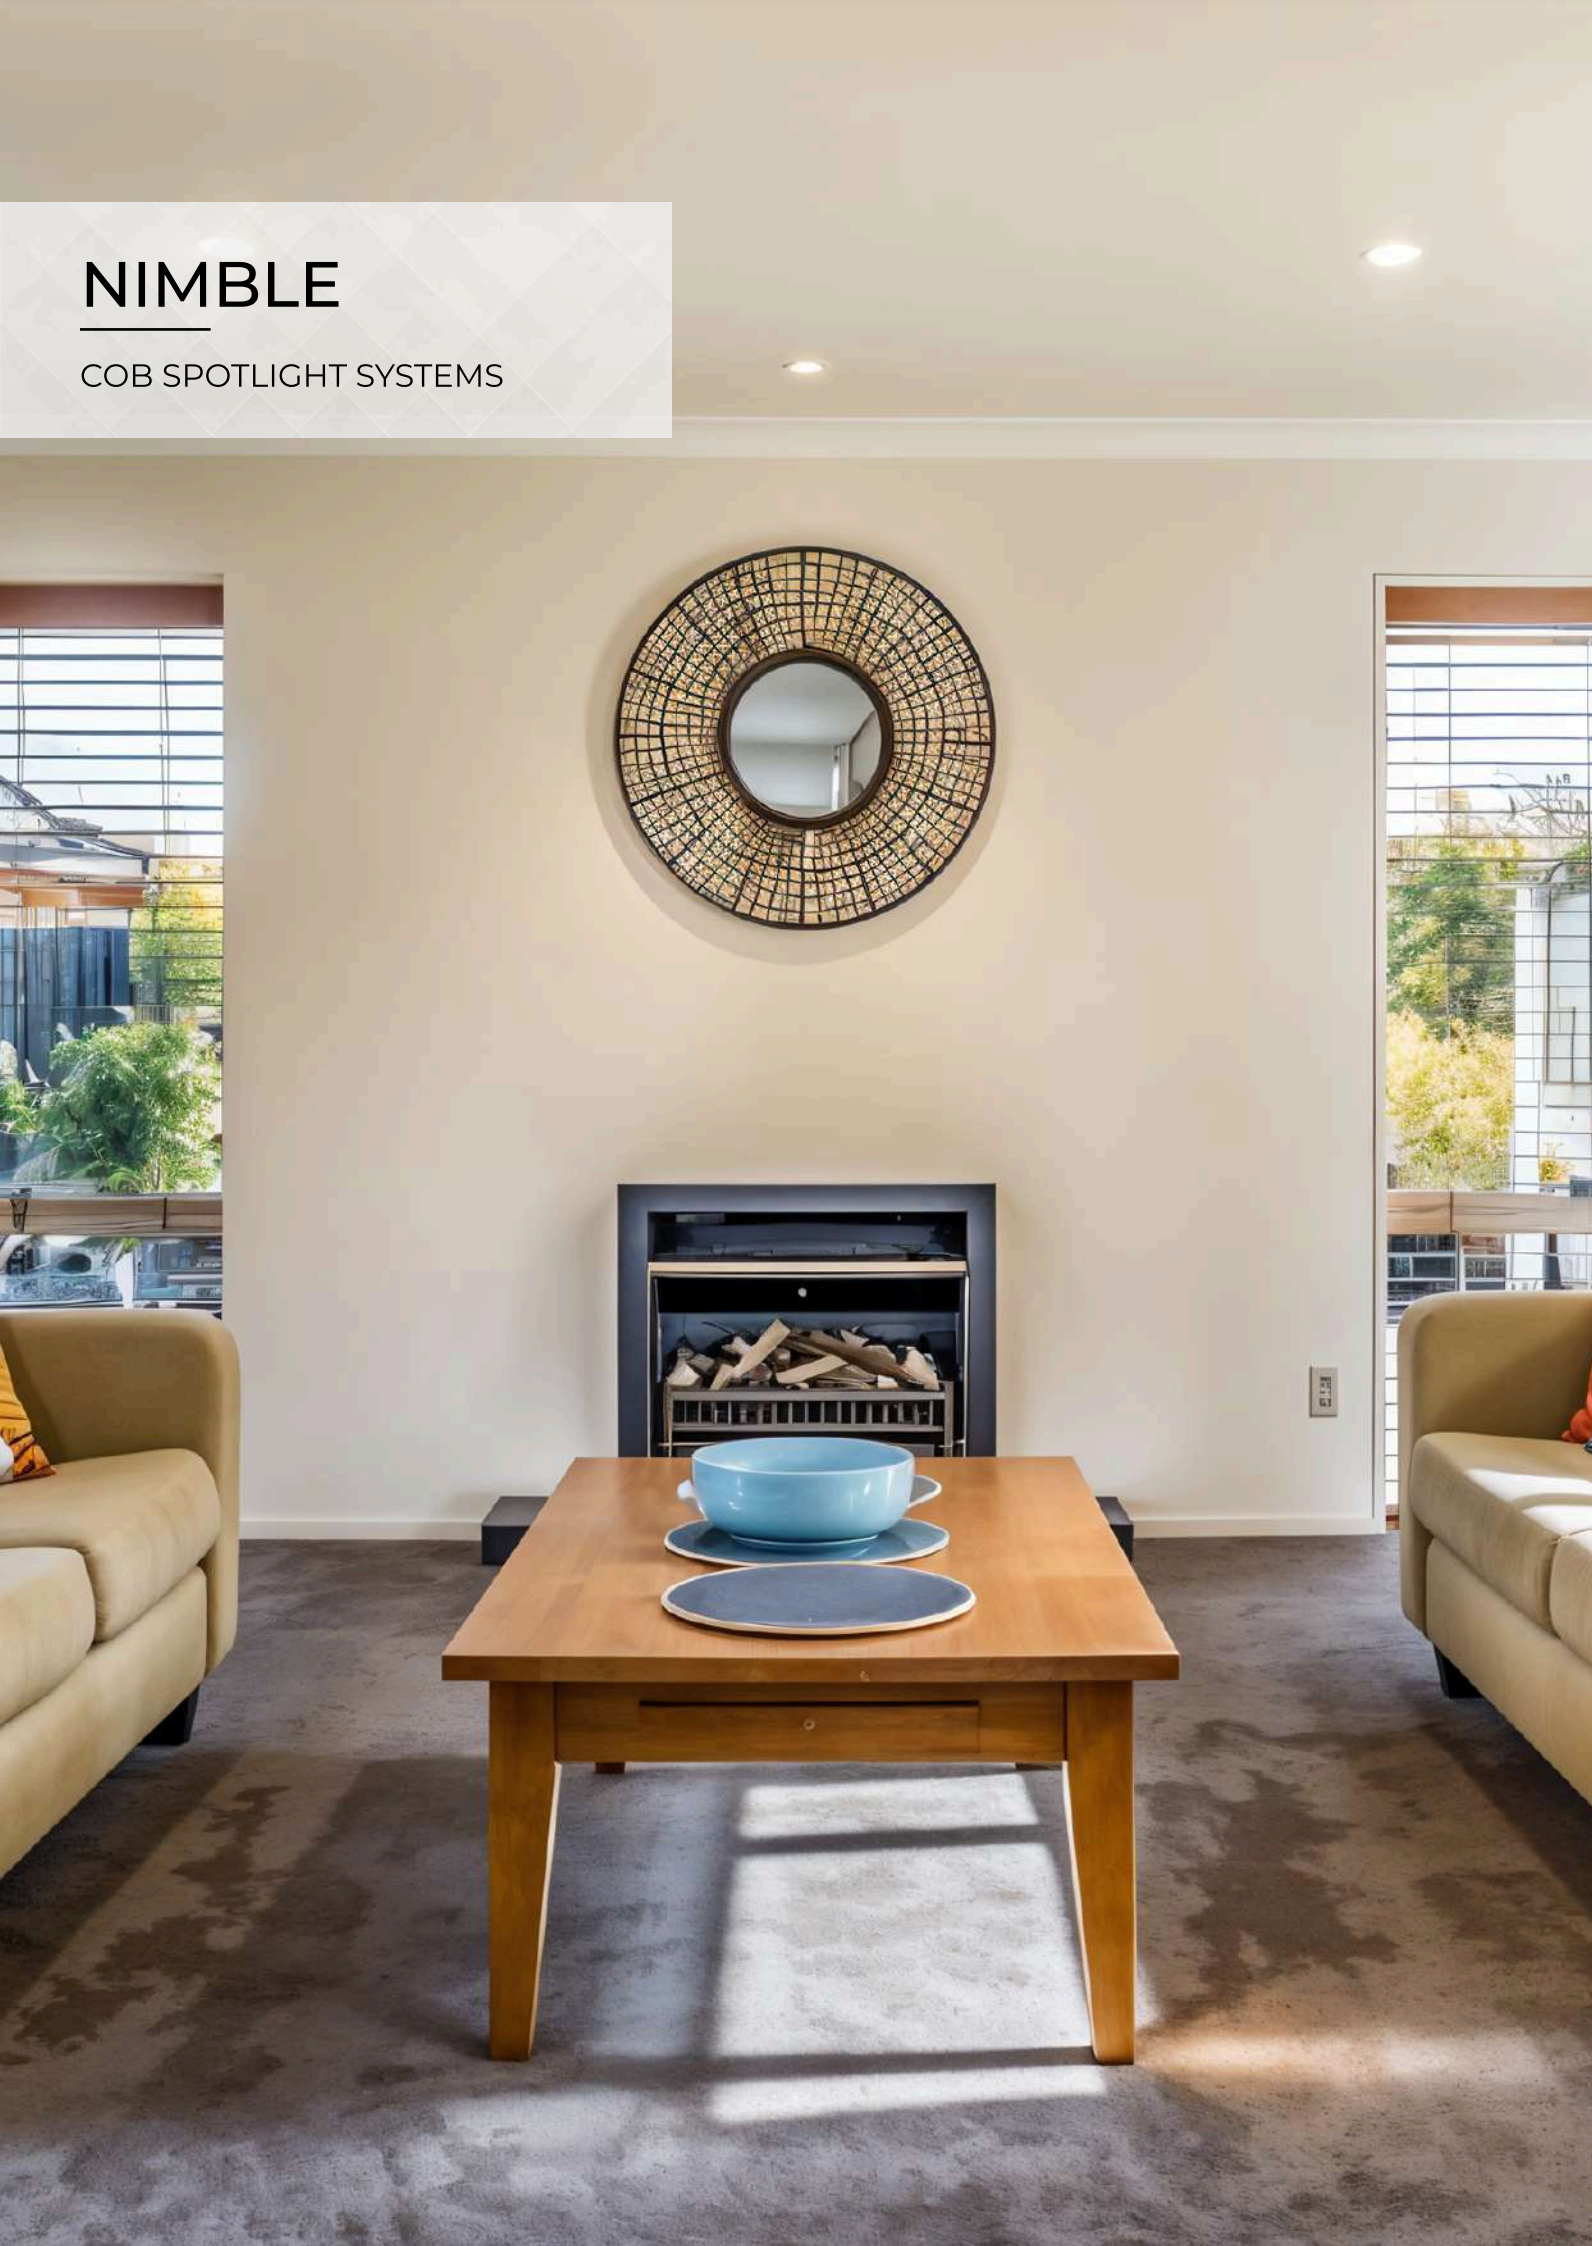

NIMBLE ROUND TRIM



NIMBLERDTRIM.1.7.MW.NI.15.55.30G


Outer Size(mm) : Dia 62x68(H)
Cut Out Size : Dia 55mm
Wattage : 7W



NIMBLERDTRIM.1.12.MW.NI.15.75.30G

Outer Size(mm) : Dia 84x101(H)
Cut Out Size : Dia 75mm
Wattage : 12W

NIMBLE SHOOT

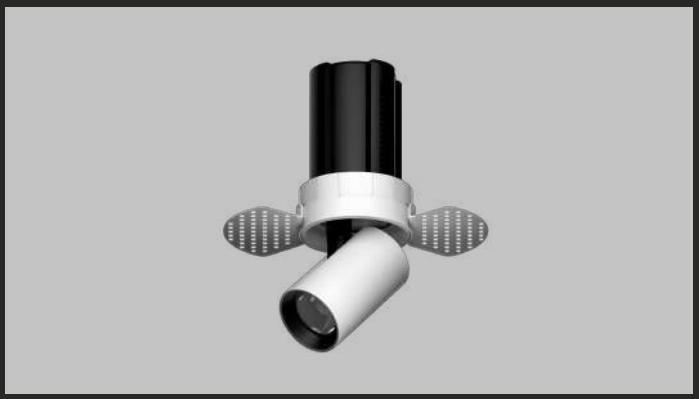

NIMBLESHT.1.7.MW.NI.15.55.30G

Outer Size(mm) : Dia 55x86(H)
Cut Out Size : Dia 55mm
Wattage : 7W



NIMBLESHT.1.7.MW.NI.15.55.30G

Outer Size(mm) : Dia 62x86(H)
Cut Out Size : Dia 55mm
Wattage : 7W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt Black / Matt White	SWIVEL ANGLE	Tiltable
REFLECTOR FINISH	Matt Black / Matt White/ Matt Silver / Nickel / Gold / Chrome	BEAM ANGLE	15°, 24°, 36°
		DRIVER BRAND	Osram
		DIMMABLE	Triac / Analogue / Dali (on request)
IP RATING	IP 20	CCT	3000k, 4000k
OPERATING TEMPERATURE	0-50°c		

NIMBLE ROUND TRIMLESS



NIMBLERDTRLS.1.7.MB.MB.15.55.30G

Outer Size(mm) : Dia 55x68(H)
Cut Out Size : Dia 55mm
Wattage : 7W



NIMBLERDTRLS.1.12.MB.MB.36.75.30G

Outer Size(mm) : Dia 73x101(H)
Cut Out Size : Dia 75mm
Wattage : 12W



NIMBLERDTRLS.2.7.MB.MB.36.131125.30G

Outer Size(mm) : 125(L)x64(W)x75(H)
Cut Out Size : 131x125mm
Wattage : 2x7W




NIMBLERDTRLS.2.12.MB.MB.24.155177.30G

Outer Size(mm) : 177(L)x83(W)x114(H)
Cut Out Size : 155x177mm
Wattage : 2x12W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt Black / Matt White	SWIVEL ANGLE	Tiltable
REFLECTOR FINISH	Matt Black / Matt White/ Matt Silver / Nickel / Gold / Chrome	BEAM ANGLE	15°, 24°, 36°
		DRIVER BRAND	Osram
		DIMMABLE	Triac / Analogue / Dali (on request)
IP RATING	IP 20	CCT	3000k, 4000k
OPERATING TEMPERATURE	0-50°c		

NIMBLE SQUARE TRIMLESS

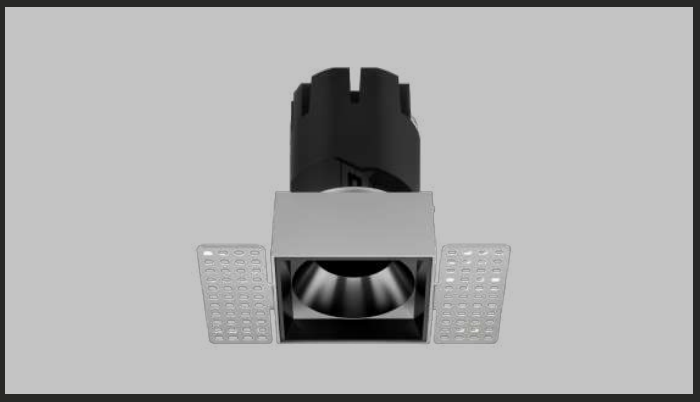


NIMBLESQTRLS.1.7.MB.MB.15.5555.30G

Outer Size(mm) : 55(L)x55(W)x88(H)
Cut Out Size : 55x55mm
Wattage : 7W




NIMBLESQTRLS.1.12.MB.MB.15.7373.30G

Outer Size(mm) : 73(L)x73(W)x112(H)
Cut Out Size : 73x73mm
Wattage : 12W

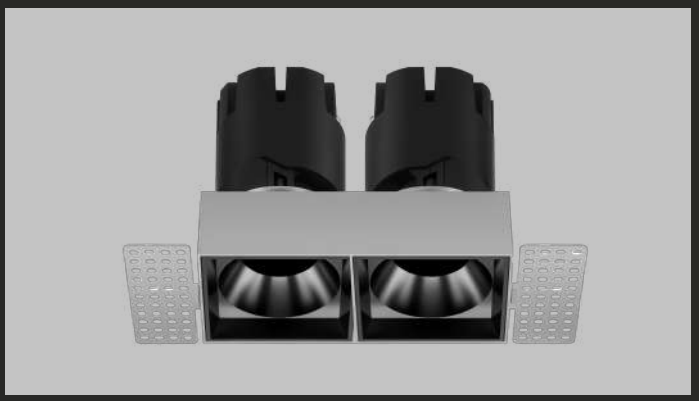

NIMBLESQTRLS.2.7.MB.MB.15.17554.30G

Outer Size(mm) : 108(L)x54(W)x88(H)
Cut Out Size : 175x54mm
Wattage : 2x7W

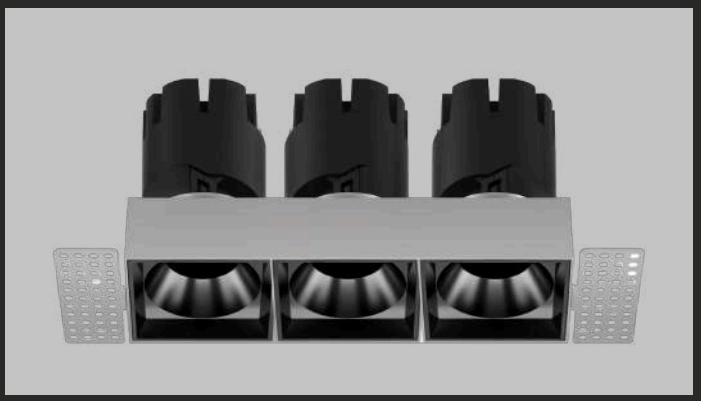

NIMBLESQTRLS.3.7.MB.MB.15.22954.30G


Outer Size(mm) :162(L)x54(W)x88(H)
Cut Out Size : 229x54mm
Wattage : 3x7W


PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt Black / Matt White	SWIVEL ANGLE	Tiltable
REFLECTOR FINISH	Matt Black / Matt White/ Matt Silver / Nickel / Gold / Chrome	BEAM ANGLE	15°, 24°, 36°
		DRIVER BRAND	Osram
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000k, 4000k

NEAT

COB SPOTLIGHT SYSTEMS

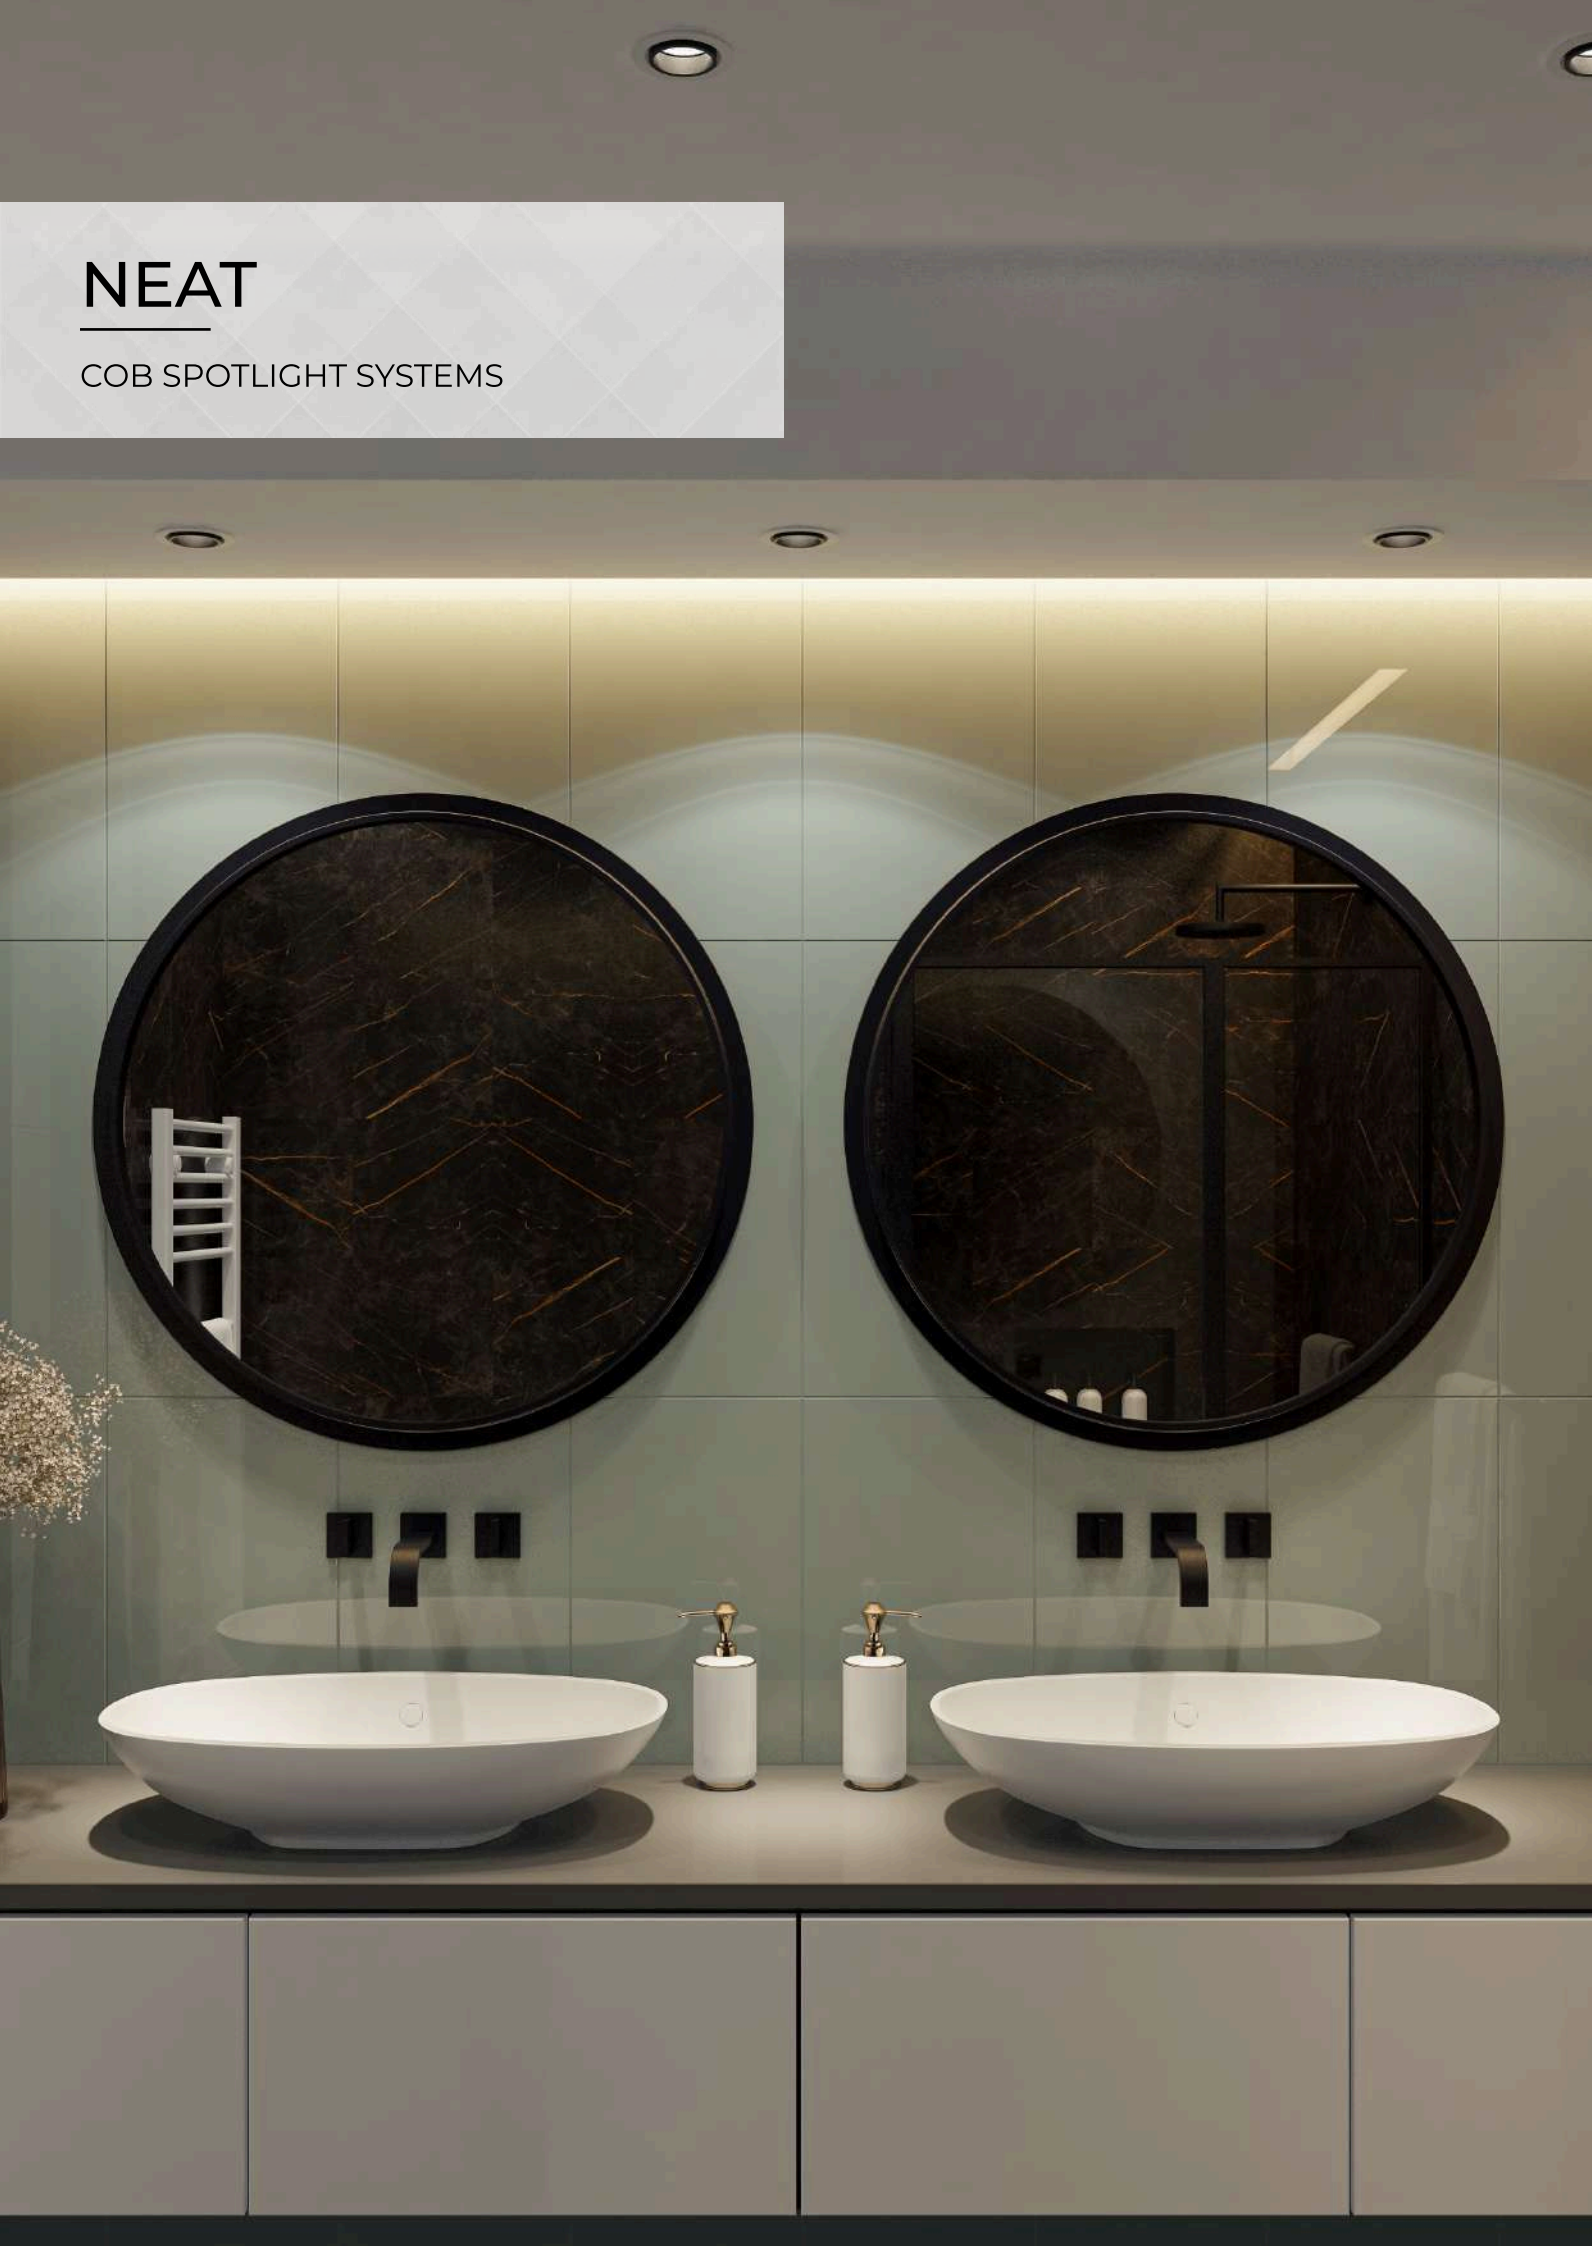

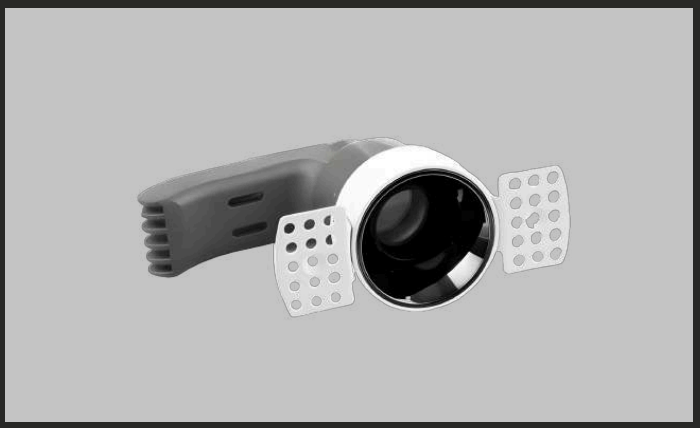

NEAT TRLS.1.12.MW.NI.36.50.30G

Outer Size(mm) : Dia 50x68(H)
Cut Out Size : Dia 55mm
Wattage : 12W



NEAT TRIM.1.12.MB.NI.36.50.30G

Outer Size(mm) : Dia 62x68(H)
Cut Out Size : Dia 55mm
Wattage : 12W



NEAT TRIM.1.17.MB.NI.36.50.30G

Outer Size(mm) : Dia 84x100(H)
Cut Out Size : Dia 75mm
Wattage : 17W



NEAT TRLS.1.17.MW.NI.36.50.30G

Outer Size(mm) : Dia 75x100(H)
Cut Out Size : Dia 75mm
Wattage : 17W

Product Properties

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt Black / Matt White	SWIVEL ANGLE	Tiltable
REFLECTOR FINISH	Matt Black / Matt White/ Matt Silver / Nickel / Gold / Chrome	BEAM ANGLE	15°, 24°, 36°, 60°
		DRIVER BRAND	Osram
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	CCT	3000k, 4000k



RARE TRIMLESS

COB SPOTLIGHT SYSTEMS



RARETRLS.1.7.MW.MB.36.32.30G

Outer Size(mm) : Dia 32x82(H)
Cut Out Size : Dia 32mm
Wattage : 7W



RARETRLS.1.9.MW.MB.36.42.30G

Outer Size(mm) : Dia 42x93(H)
Cut Out Size : Dia 42mm
Wattage : 9W



RARETRLS.1.12.MW.MB.36.52.30G

Outer Size(mm) : Dia 52x100(H)
Cut Out Size : Dia 52mm
Wattage : 12W



RARETRLS.1.17.MW.MB.36.62.30G


Outer Size(mm) : Dia 62x110(H)
Cut Out Size : Dia 62mm
Wattage : 17W

PRODUCT PROPERTIES

LED	Osram	OPERATING TEMPERATURE	0-50°c
INPUT VOLTAGE	220-240V AC	HOUSING MATERIAL	Aluminium Die Cast
PRODUCT FINISH	N.A.	SWIVEL ANGLE	Tiltable
REFLECTOR FINISH	Nickel	BEAM ANGLE	24°, 36°
IP RATING	IP 20	DRIVER BRAND	B.A.G / Osram
CRI	>90	DIMMABLE	Triac / Analogue / Dali (on Request)
		CCT	3000k, 4000k, 6500k

RARE TRIM

COB SPOTLIGHT SYSTEMS

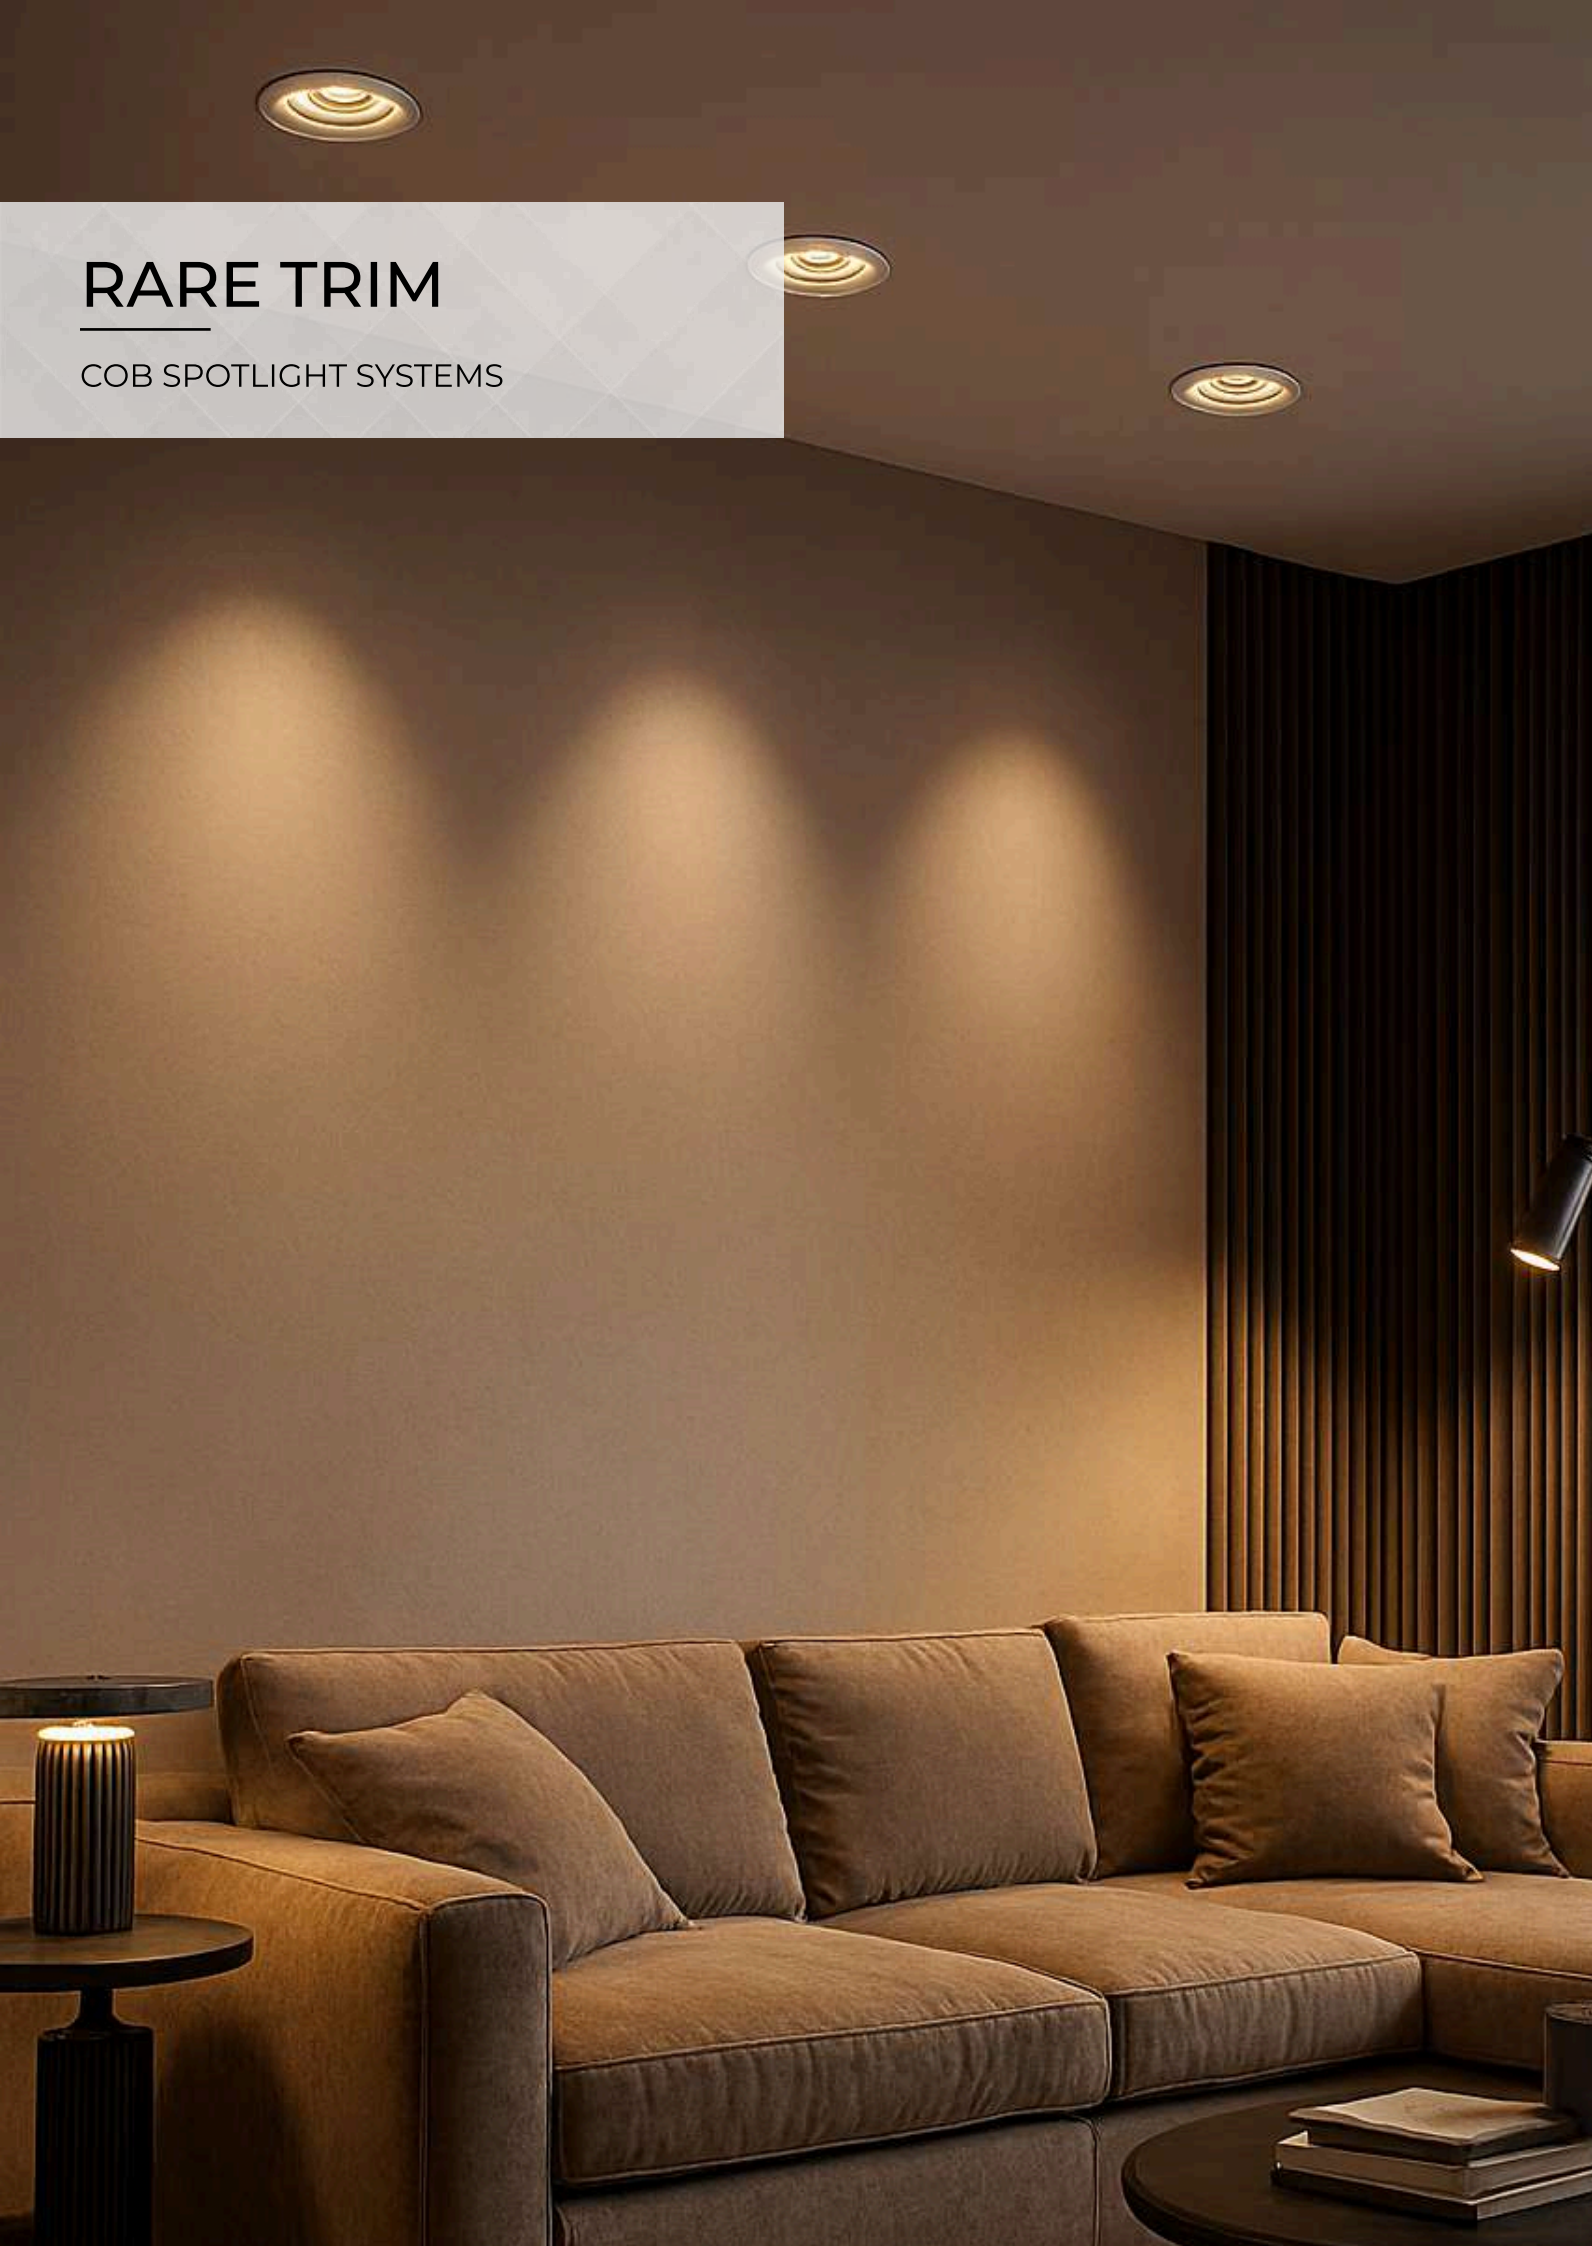



RARE TRIM.1.7.MW.NI.36.32.30G

Outer Size(mm) : Dia 42x114(H)
Cutout Size : Dia 32mm
Wattage : 7W



RARE TRIM.1.9.MW.NI.36.42.30G

Outer Size(mm) : Dia 52x94(H)
Cutout Size : Dia 42mm
Wattage : 9W



RARE TRIM.1.12.MW.NI.36.52.30G

Outer Size(mm) : Dia 62x102(H)
Cutout Size : Dia 52mm
Wattage : 12W




RARE TRIM.1.17.MW.NI.36.62.30G

Outer Size(mm) : Dia 72x111(H)
Cutout Size : Dia 62mm
Wattage : 17W

PRODUCT PROPERTIES

LED	Osram	OPERATING TEMPERATURE	0-50°c
INPUT VOLTAGE	220-240V ac	HOUSING MATERIAL	Aluminium Die Cast
PRODUCT FINISH	Matt White / Matt Black	SWIVEL ANGLE	Tiltable
REFLECTOR FINISH	Matt Black / Nickel	BEAM ANGLE	24°, 36°
IP RATING	IP 20	DRIVER BRAND	Osram
CRI	>90	DIMMABLE	Triac / Analogue / Dali (on Request)
		CCT	3000k, 4000k, 6500k

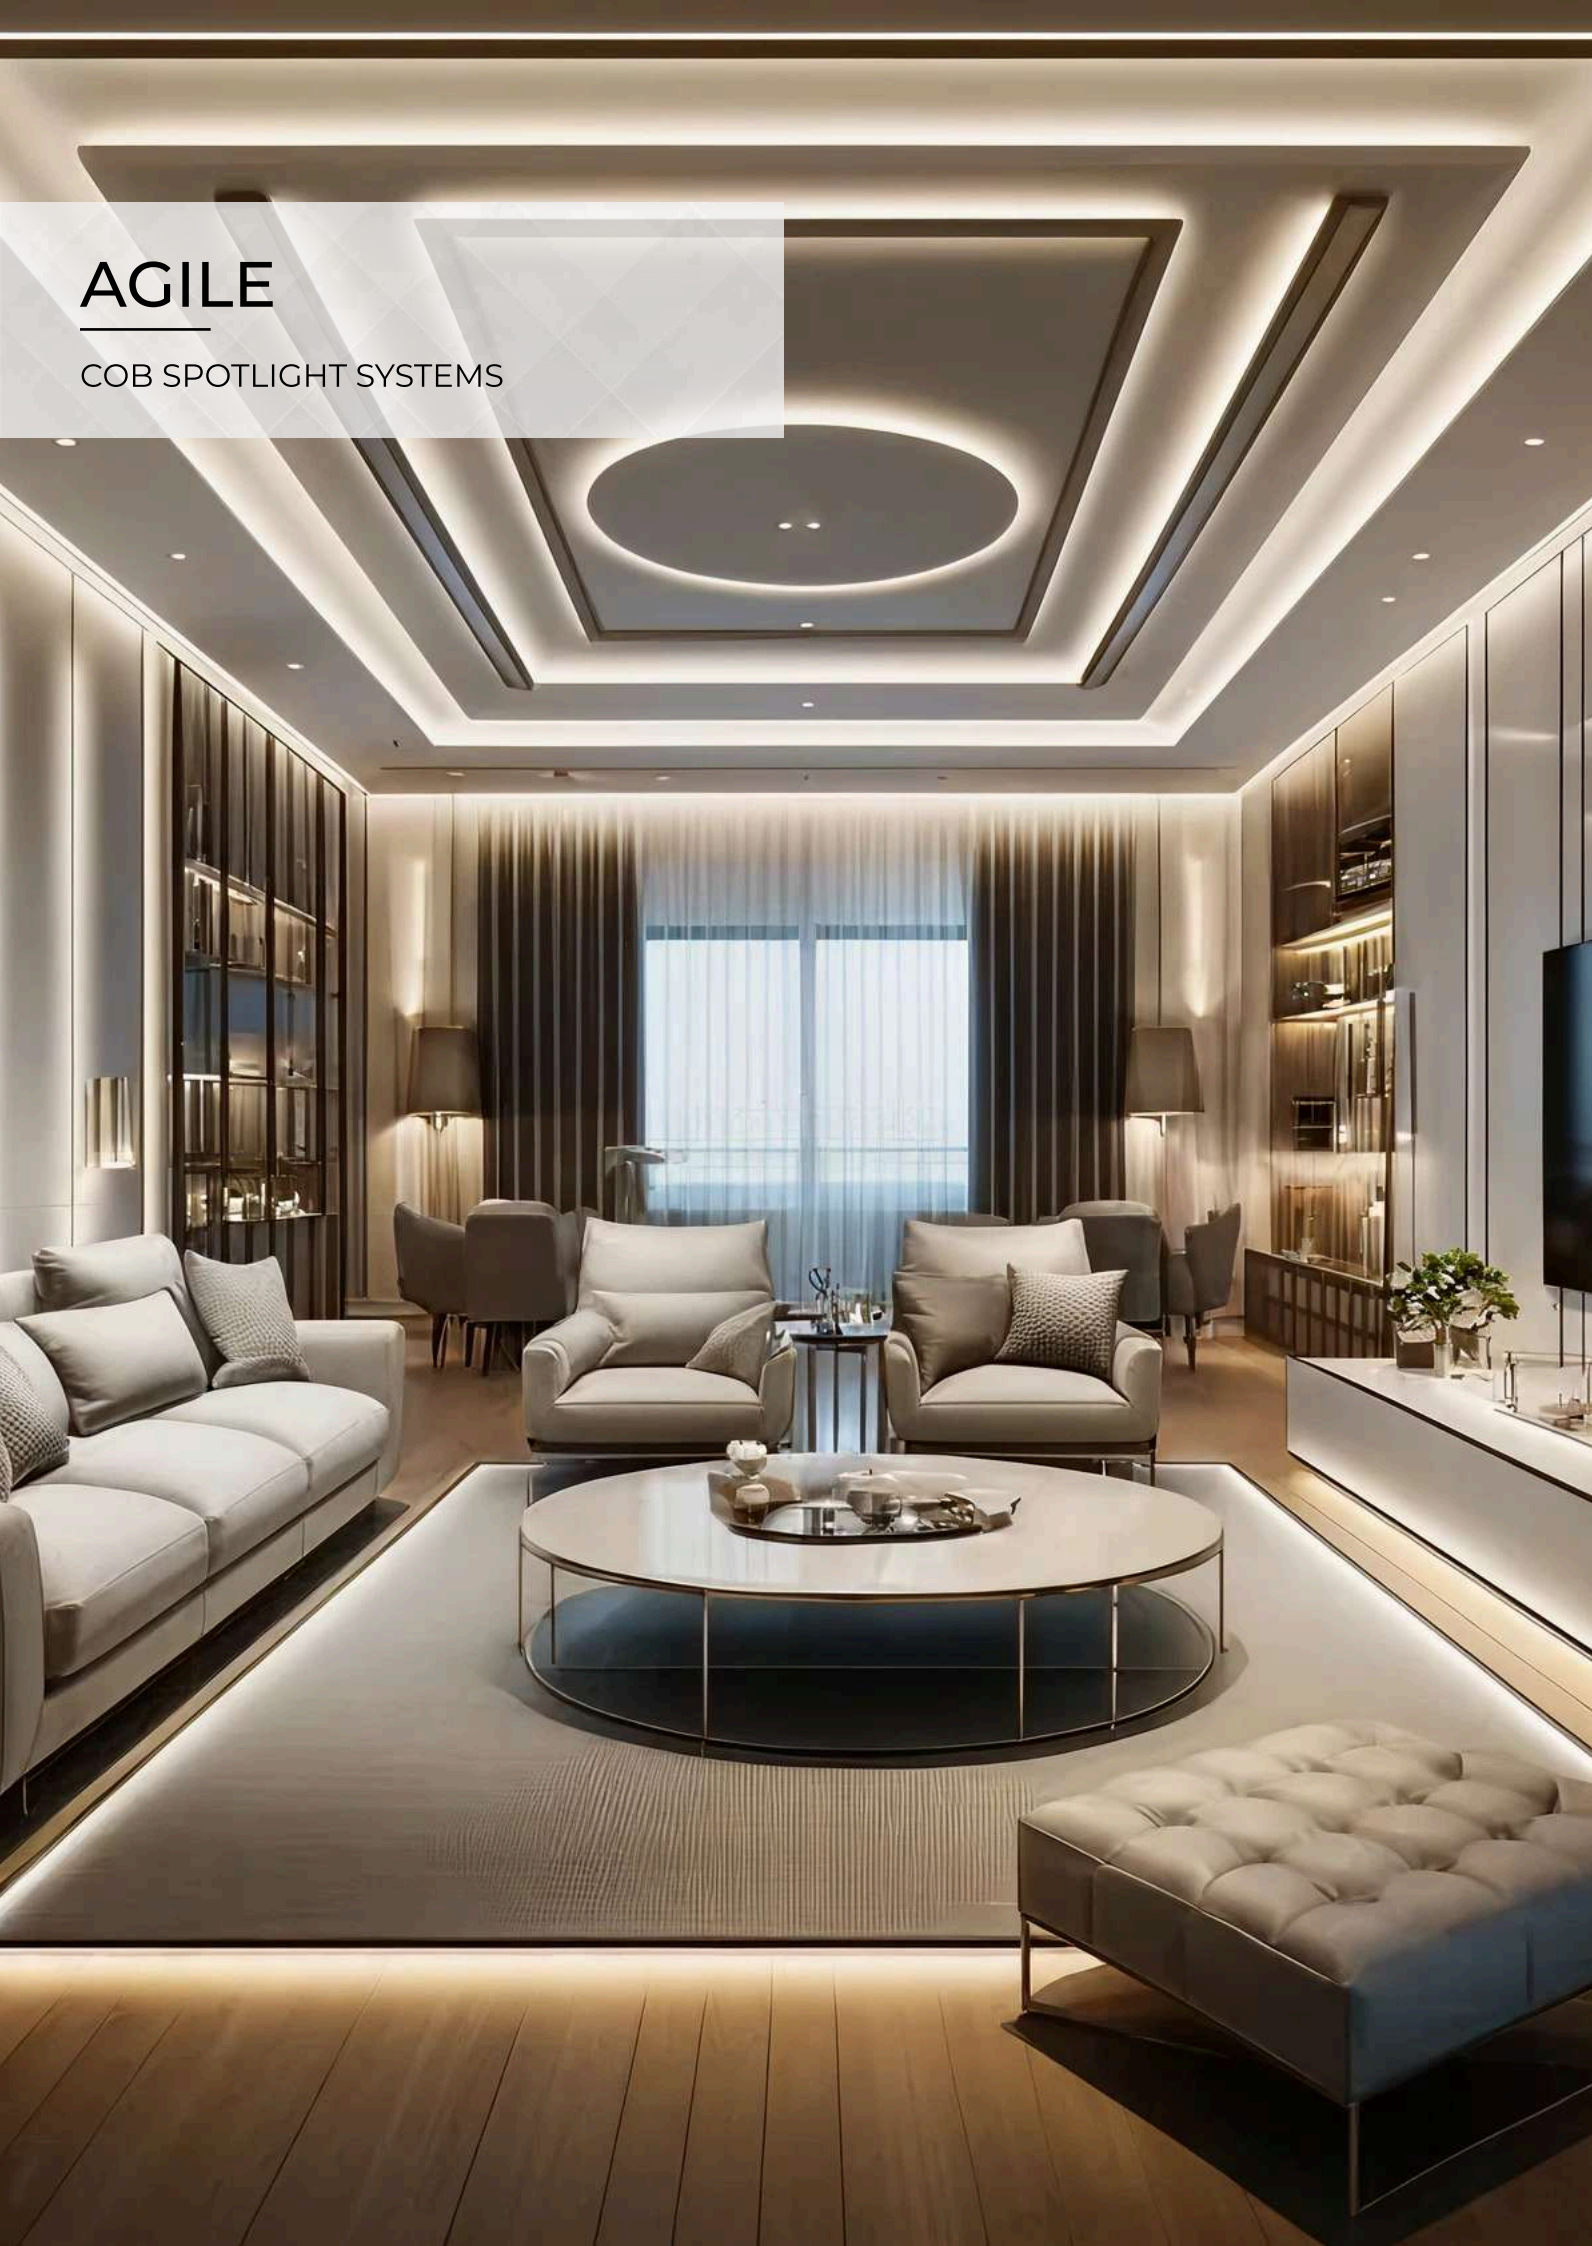


AGILE

COB SPOTLIGHT SYSTEMS




AGILE.1.7.MW.NI.36.30.30G

Outer Size(mm) : Dia 37x73(H)
Cutout Size : Dia 27mm
Wattage : 7W

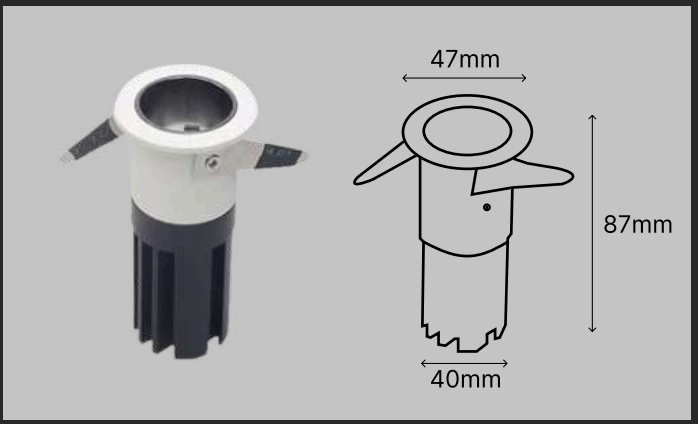

AGILE.1.9.MW.NI.36.40.30G

Outer Size(mm) : Dia 47x87(H)
Cutout Size : Dia 37mm
Wattage : 9W

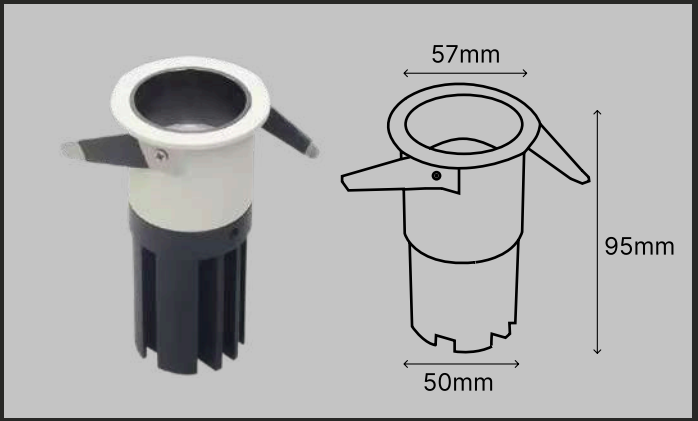

AGILE.1.12.MW.NI.36.50.30G

Outer Size(mm) : Dia 57x95(H)
Cutout Size : Dia 47mm
Wattage : 12W



AGILE.1.17.MW.NI.36.60.30G


Outer Size(mm) : Dia 67x100(H)
Cutout Size : Dia 57mm
Wattage : 17W

PRODUCT PROPERTIES

LED	Osram	OPERATING TEMPERATURE	0-50°c
INPUT VOLTAGE	220-240V ac	HOUSING MATERIAL	Aluminium Die Cast
PRODUCT FINISH	Matt White / Matt Black	SWIVEL ANGLE	Fixed
REFLECTOR FINISH	Nickel	BEAM ANGLE	24°, 36°
IP RATING	IP 20	DRIVER BRAND	Osram
CRI	>90	DIMMABLE	Triac / Analogue / Dali (on Request)
		CCT	3000k, 4000k, 6500k

QUICK

COB SPOTLIGHT SYSTEMS

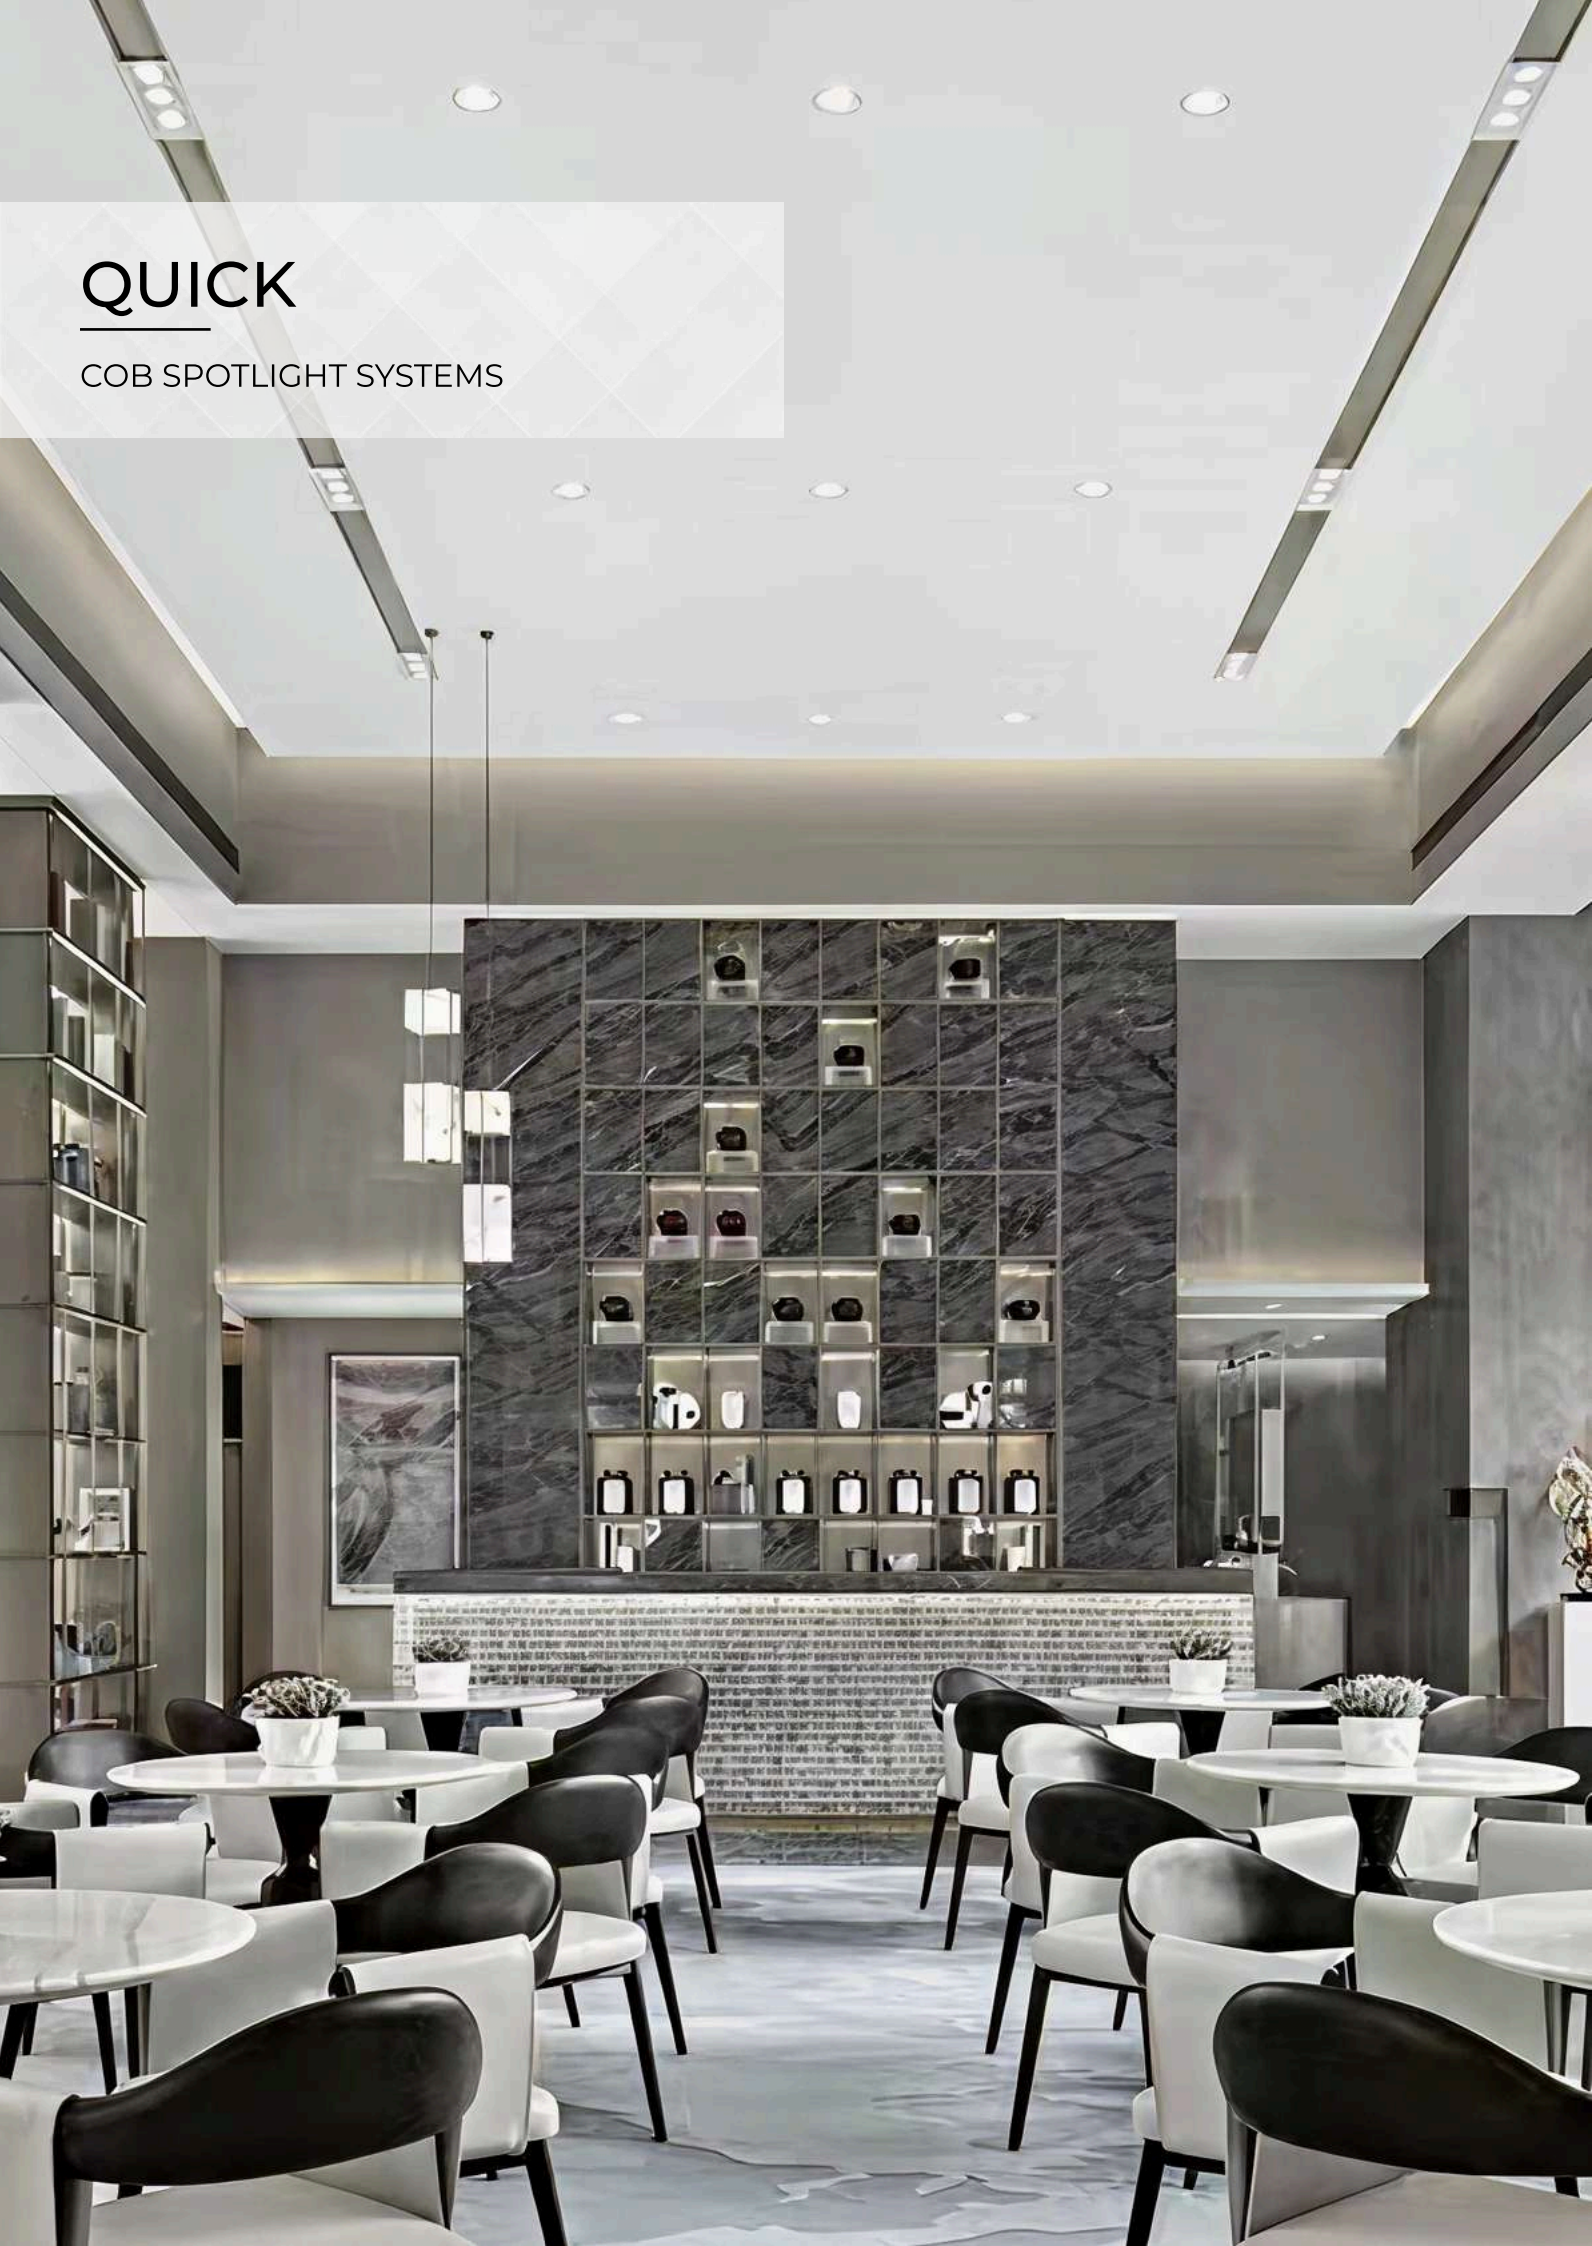



QUICK.1.5.MW.MW.36.22.30G

Outer Size(mm) : Dia 30x63(H)
Cutout Size : Dia 22mm
Wattage : 5W



QUICK.1.9.MW.MW.36.42.30G

Outer Size(mm) : Dia 50x70(H)
Cutout Size : Dia 42mm
Wattage : 9W



QUICK.1.12.MW.MW.36.52.30G


Outer Size(mm) : Dia 60x74(H)
Cutout Size : Dia 52mm
Wattage : 12W


PRODUCT PROPERTIES

LED	Osram	OPERATING TEMPERATURE	0-50°c
INPUT VOLTAGE	220-240V ac	HOUSING MATERIAL	Aluminium Die Cast
PRODUCT FINISH	Matt White / Matt Black	SWIVEL ANGLE	Fixed
REFLECTOR FINISH	Matt White / Matt Black	BEAM ANGLE	24°, 36°
IP RATING	IP 20	DRIVER BRAND	Osram
CRI	>90	DIMMABLE	Triac / Analogue / Dali (on Request)
		CCT	3000k, 4000k, 6500k

PRIVY


COB SPOTLIGHT SYSTEMS

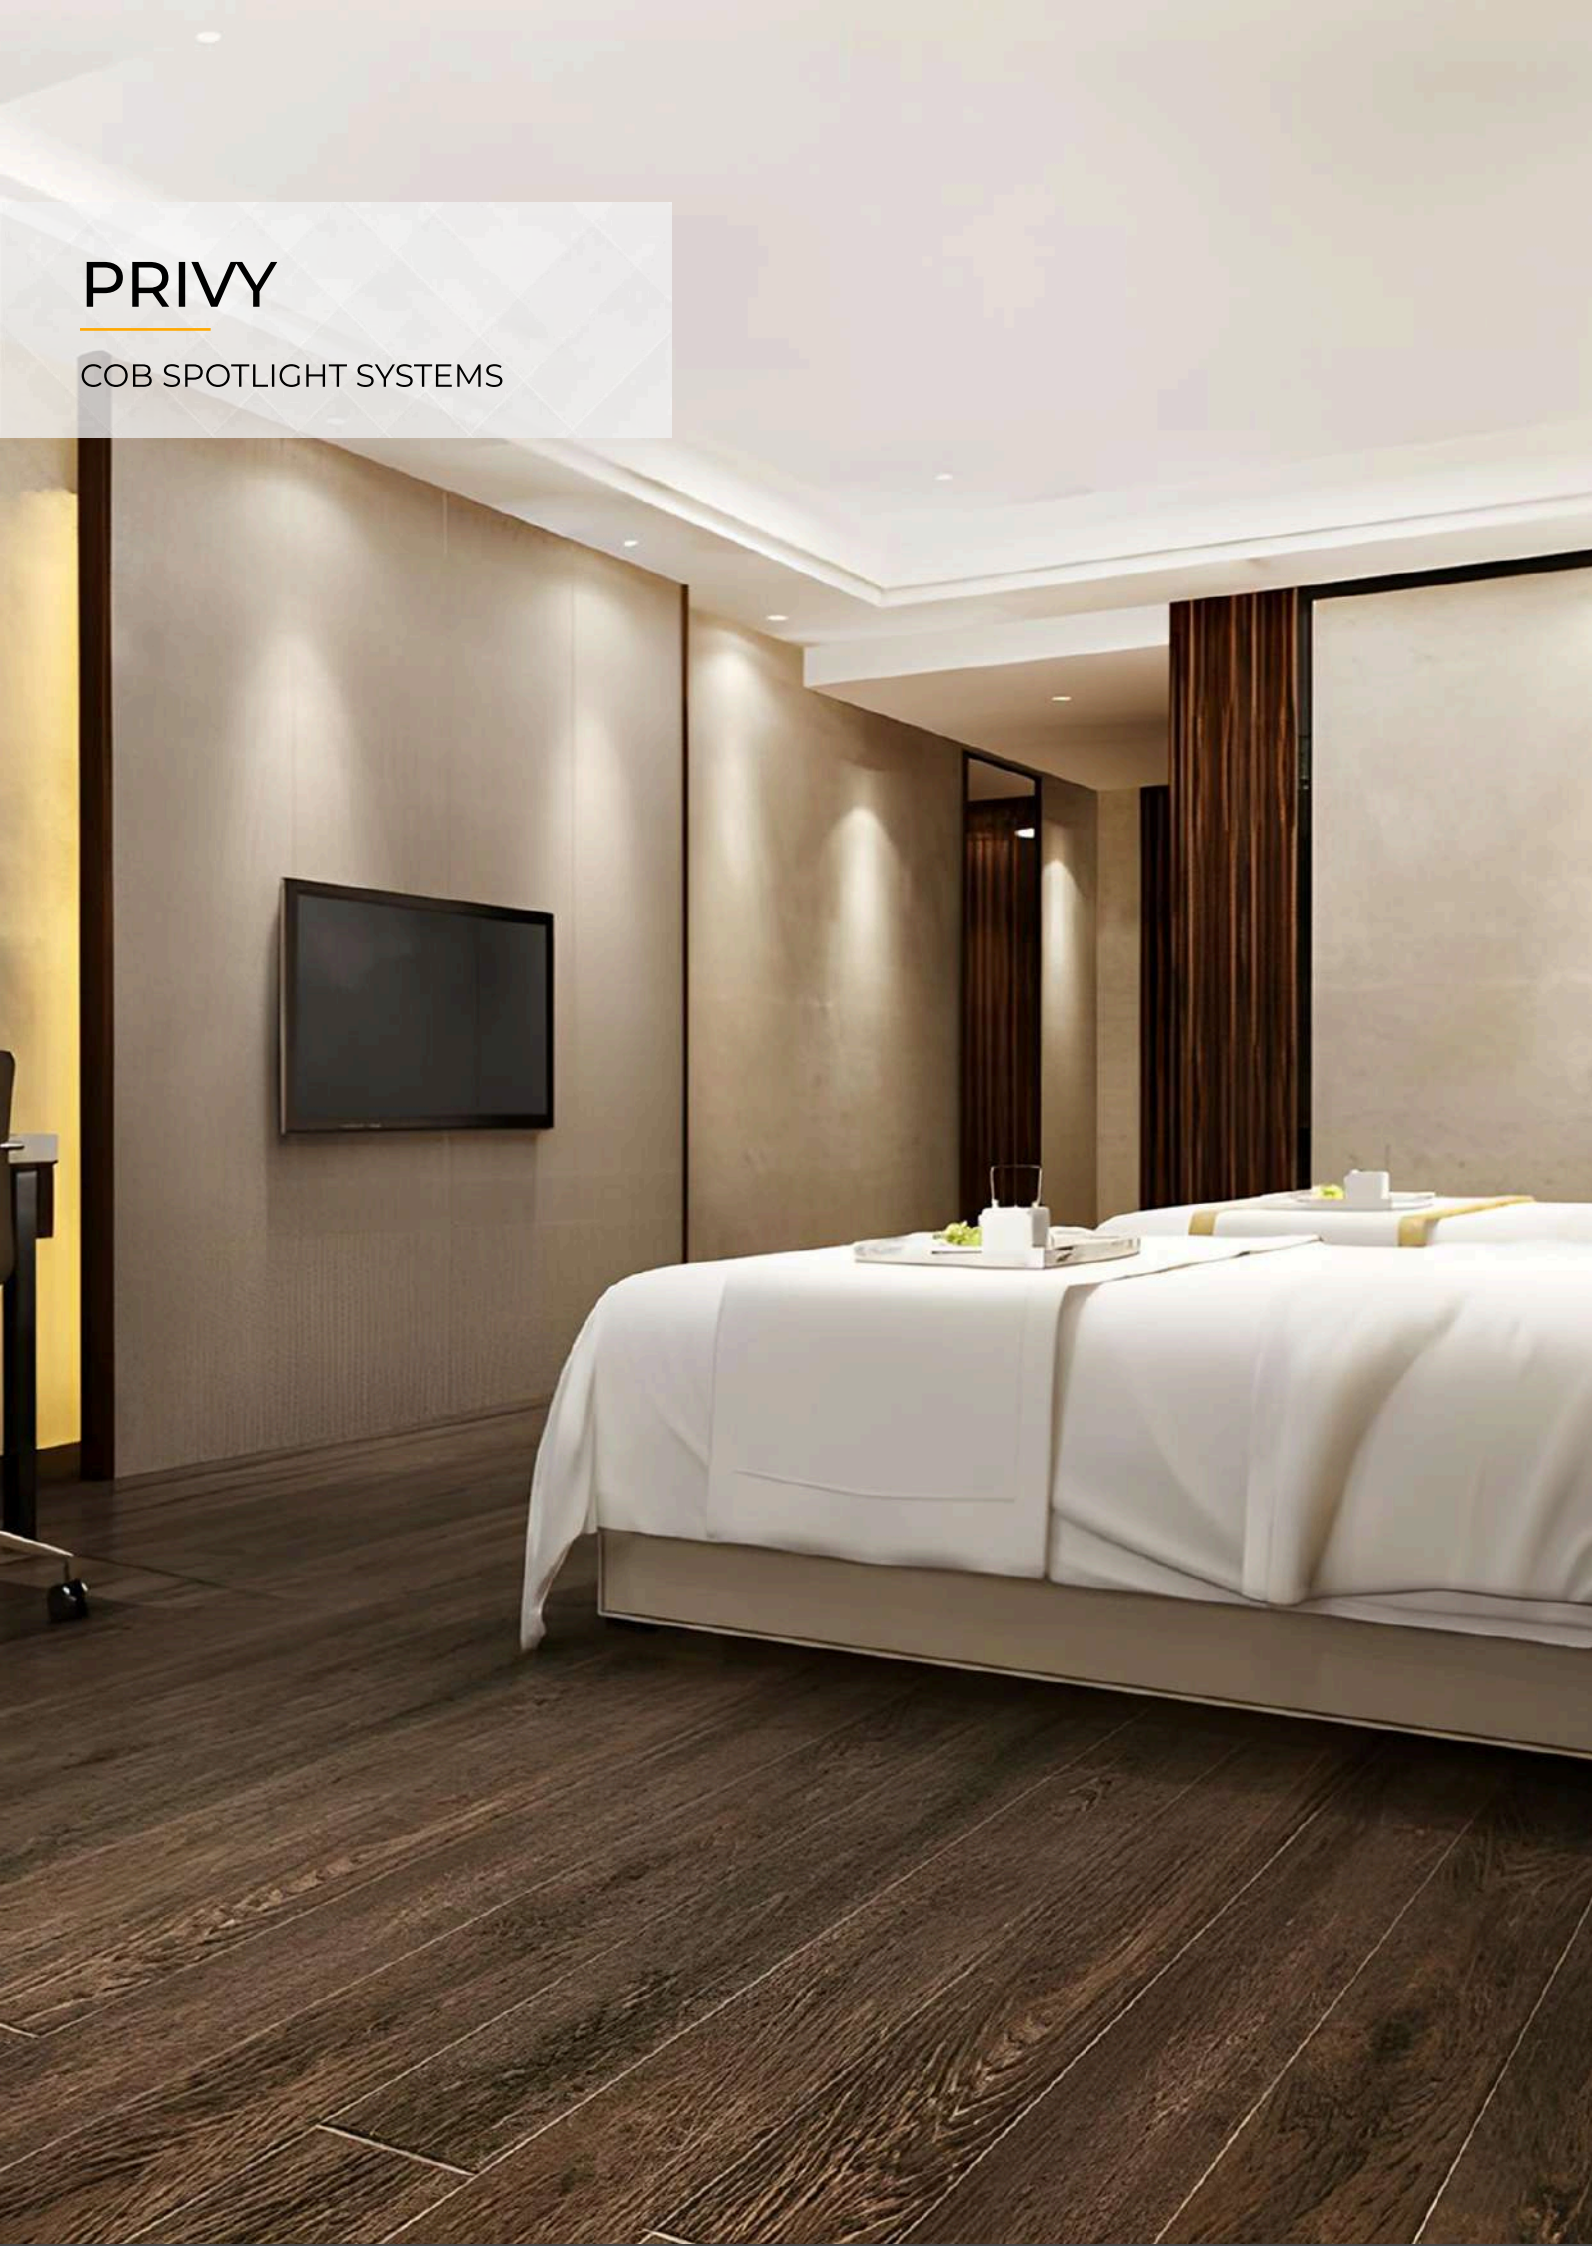

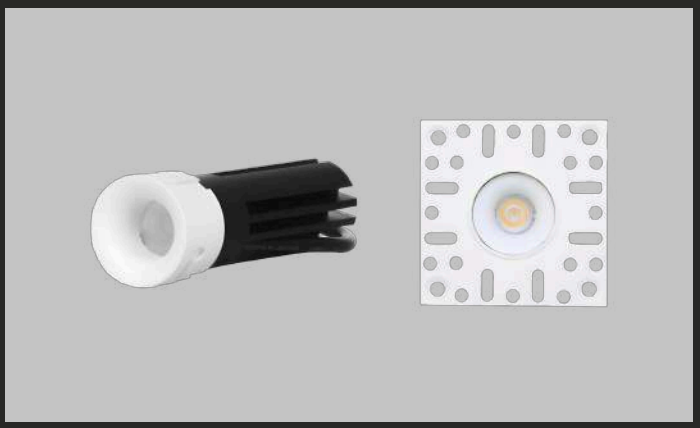

PRIVY.1.7.MW.MW.36.30.30G

Outer Size(mm) : Dia 26x81(H)
Cut Out Size : Dia 30 mm
Wattage : 7W

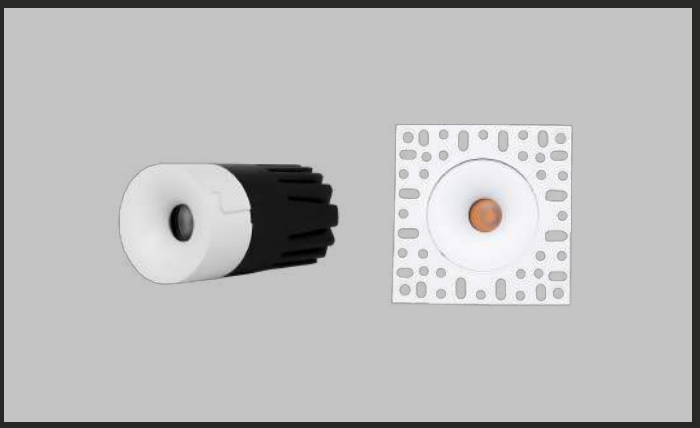


PRIVY.1.12.MB.MB.36.50.30G

Outer Size(mm) : Dia 45x80(H)
Cut Out Size : Dia 50mm
Wattage : 12W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt Black / Matt White	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt Black / Matt White	BEAM ANGLE	36°
IP RATING	IP 20	DRIVER BRAND	Eaglerise/Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac / Analogue / Dali (on request)
		CCT	3000k, 4000k




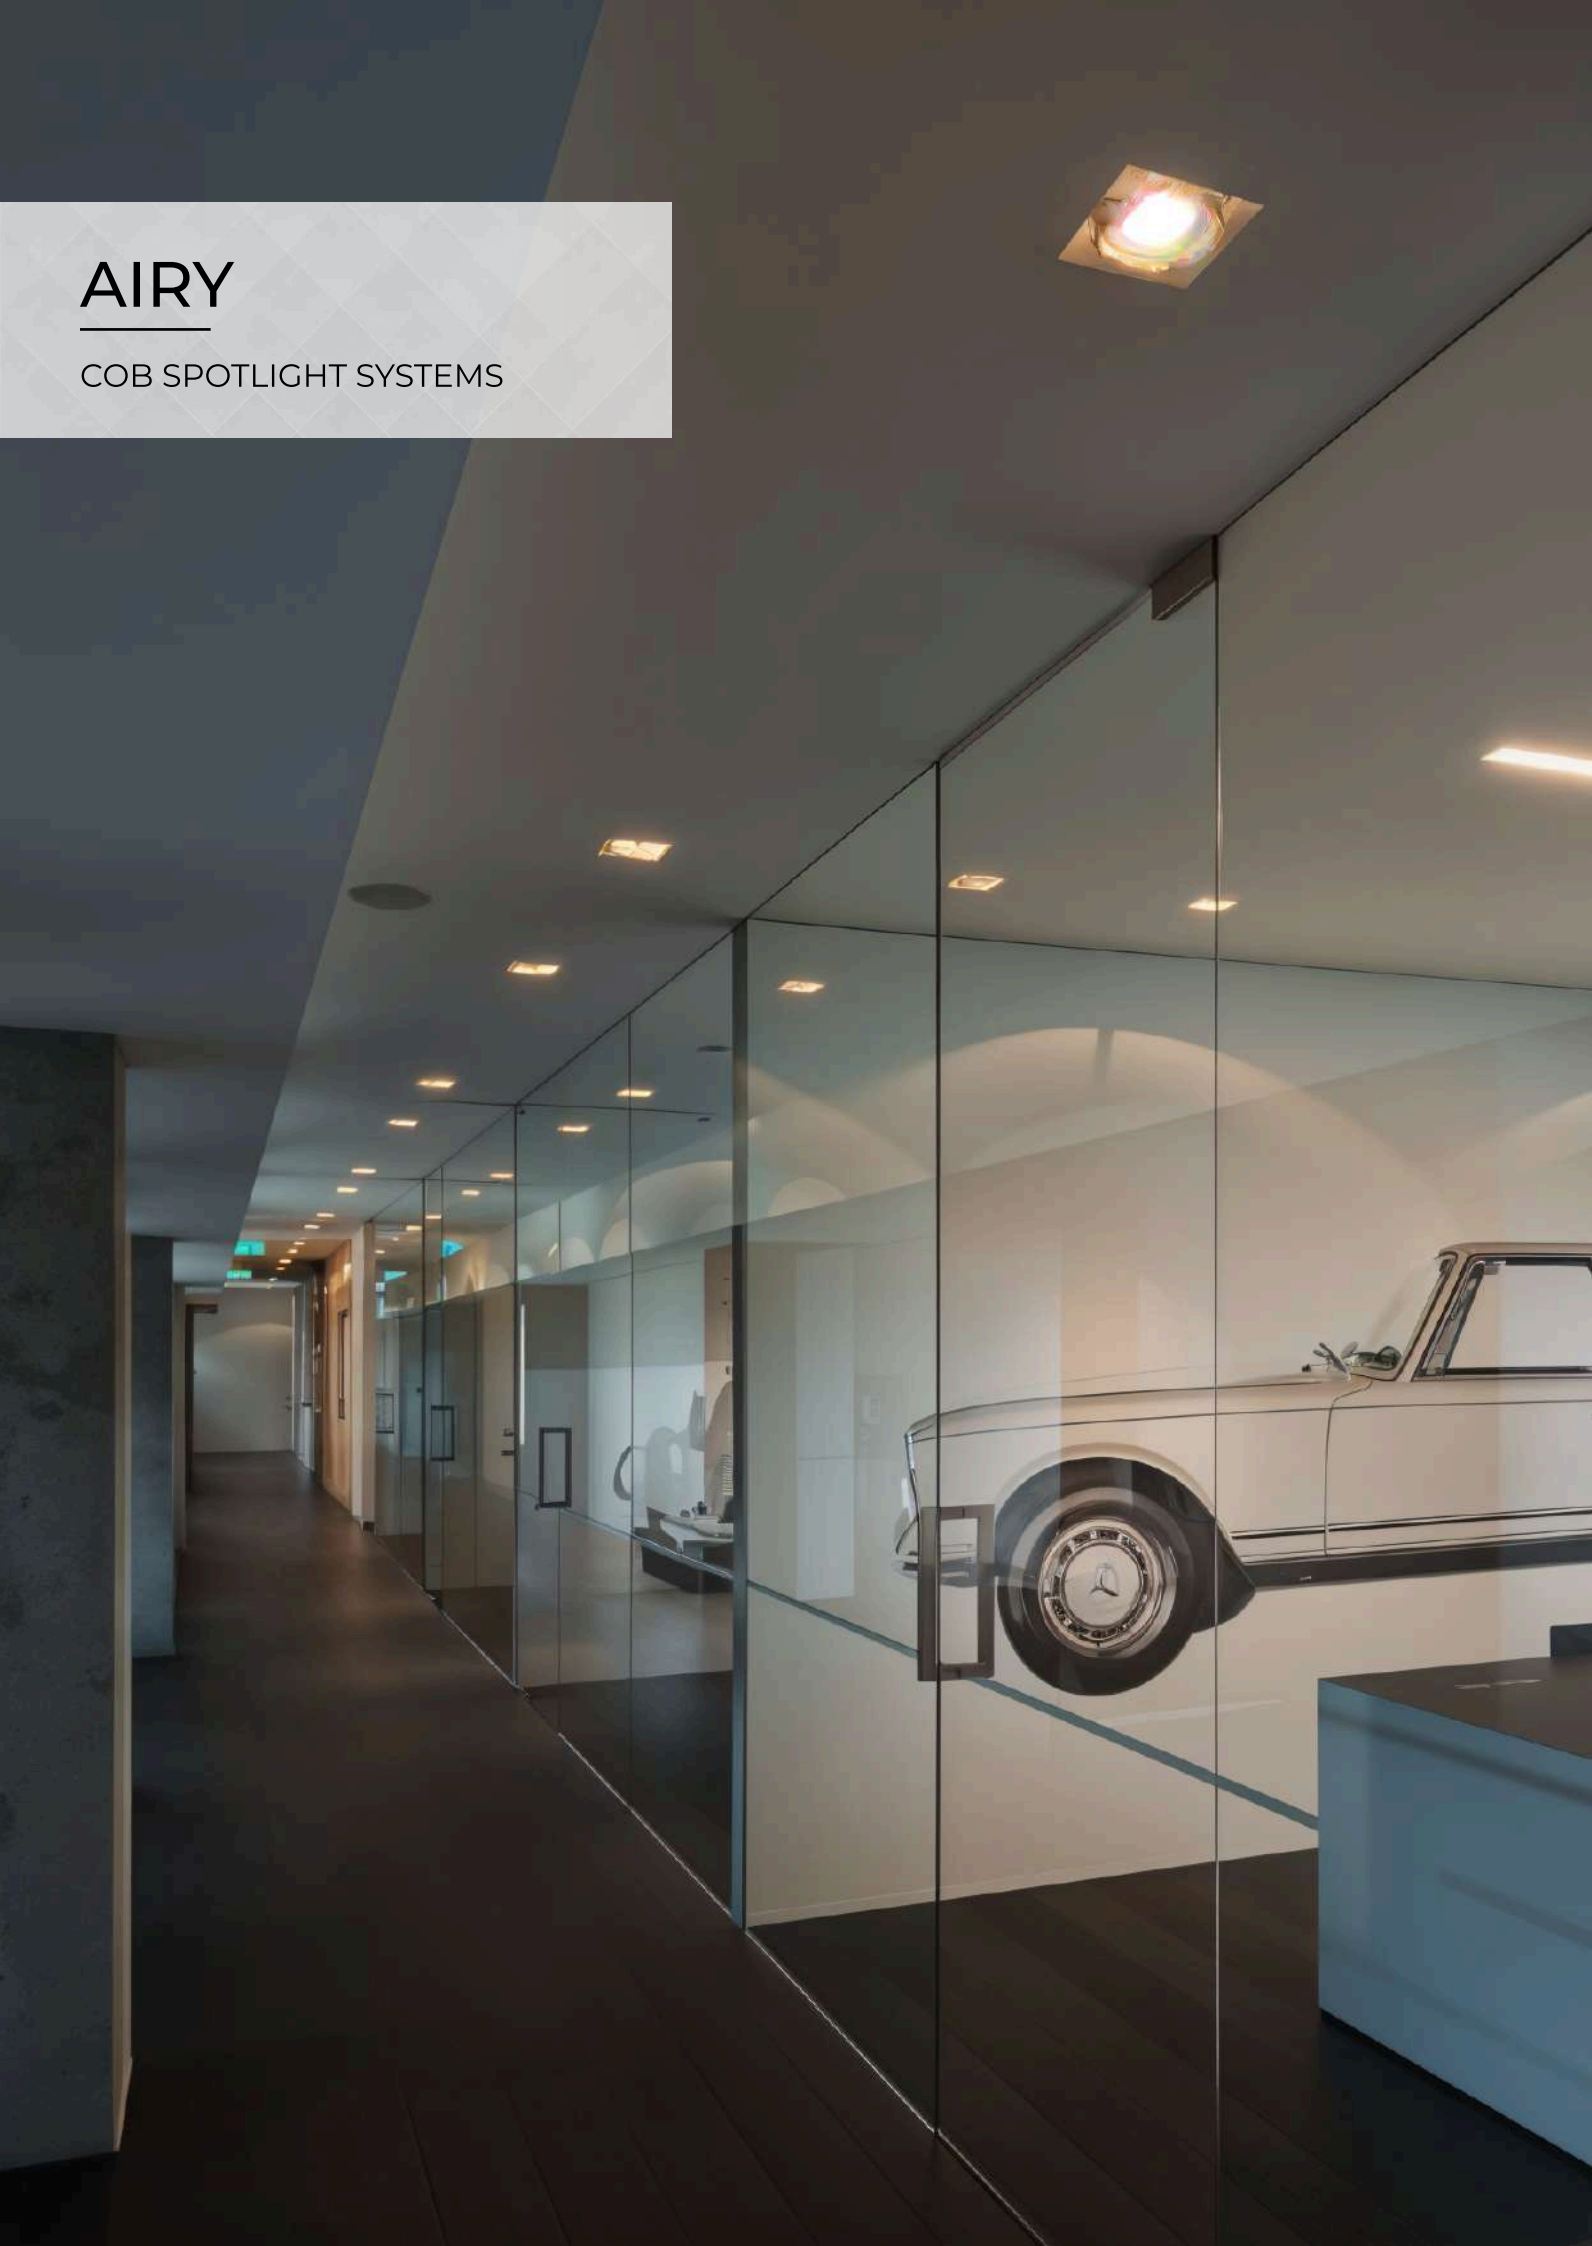



AIRY

COB SPOTLIGHT SYSTEMS










AIRY.1.12.SW.ASH.24.8080.30S

Outer Size(mm) : 110(L)x110(W)(Outer trim)x110(H)
Inner Size : 74mmx74mm(Inner light)
Cut Out Size : 80x80mm
Wattage : 12W

AIRY SERIES


LED	Bridgelux V8	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Sand White	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Ash	BEAM ANGLE	24°, 35°
IP RATING	IP 20	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac / Analogue / Dali (on request)
		CCT	3000k



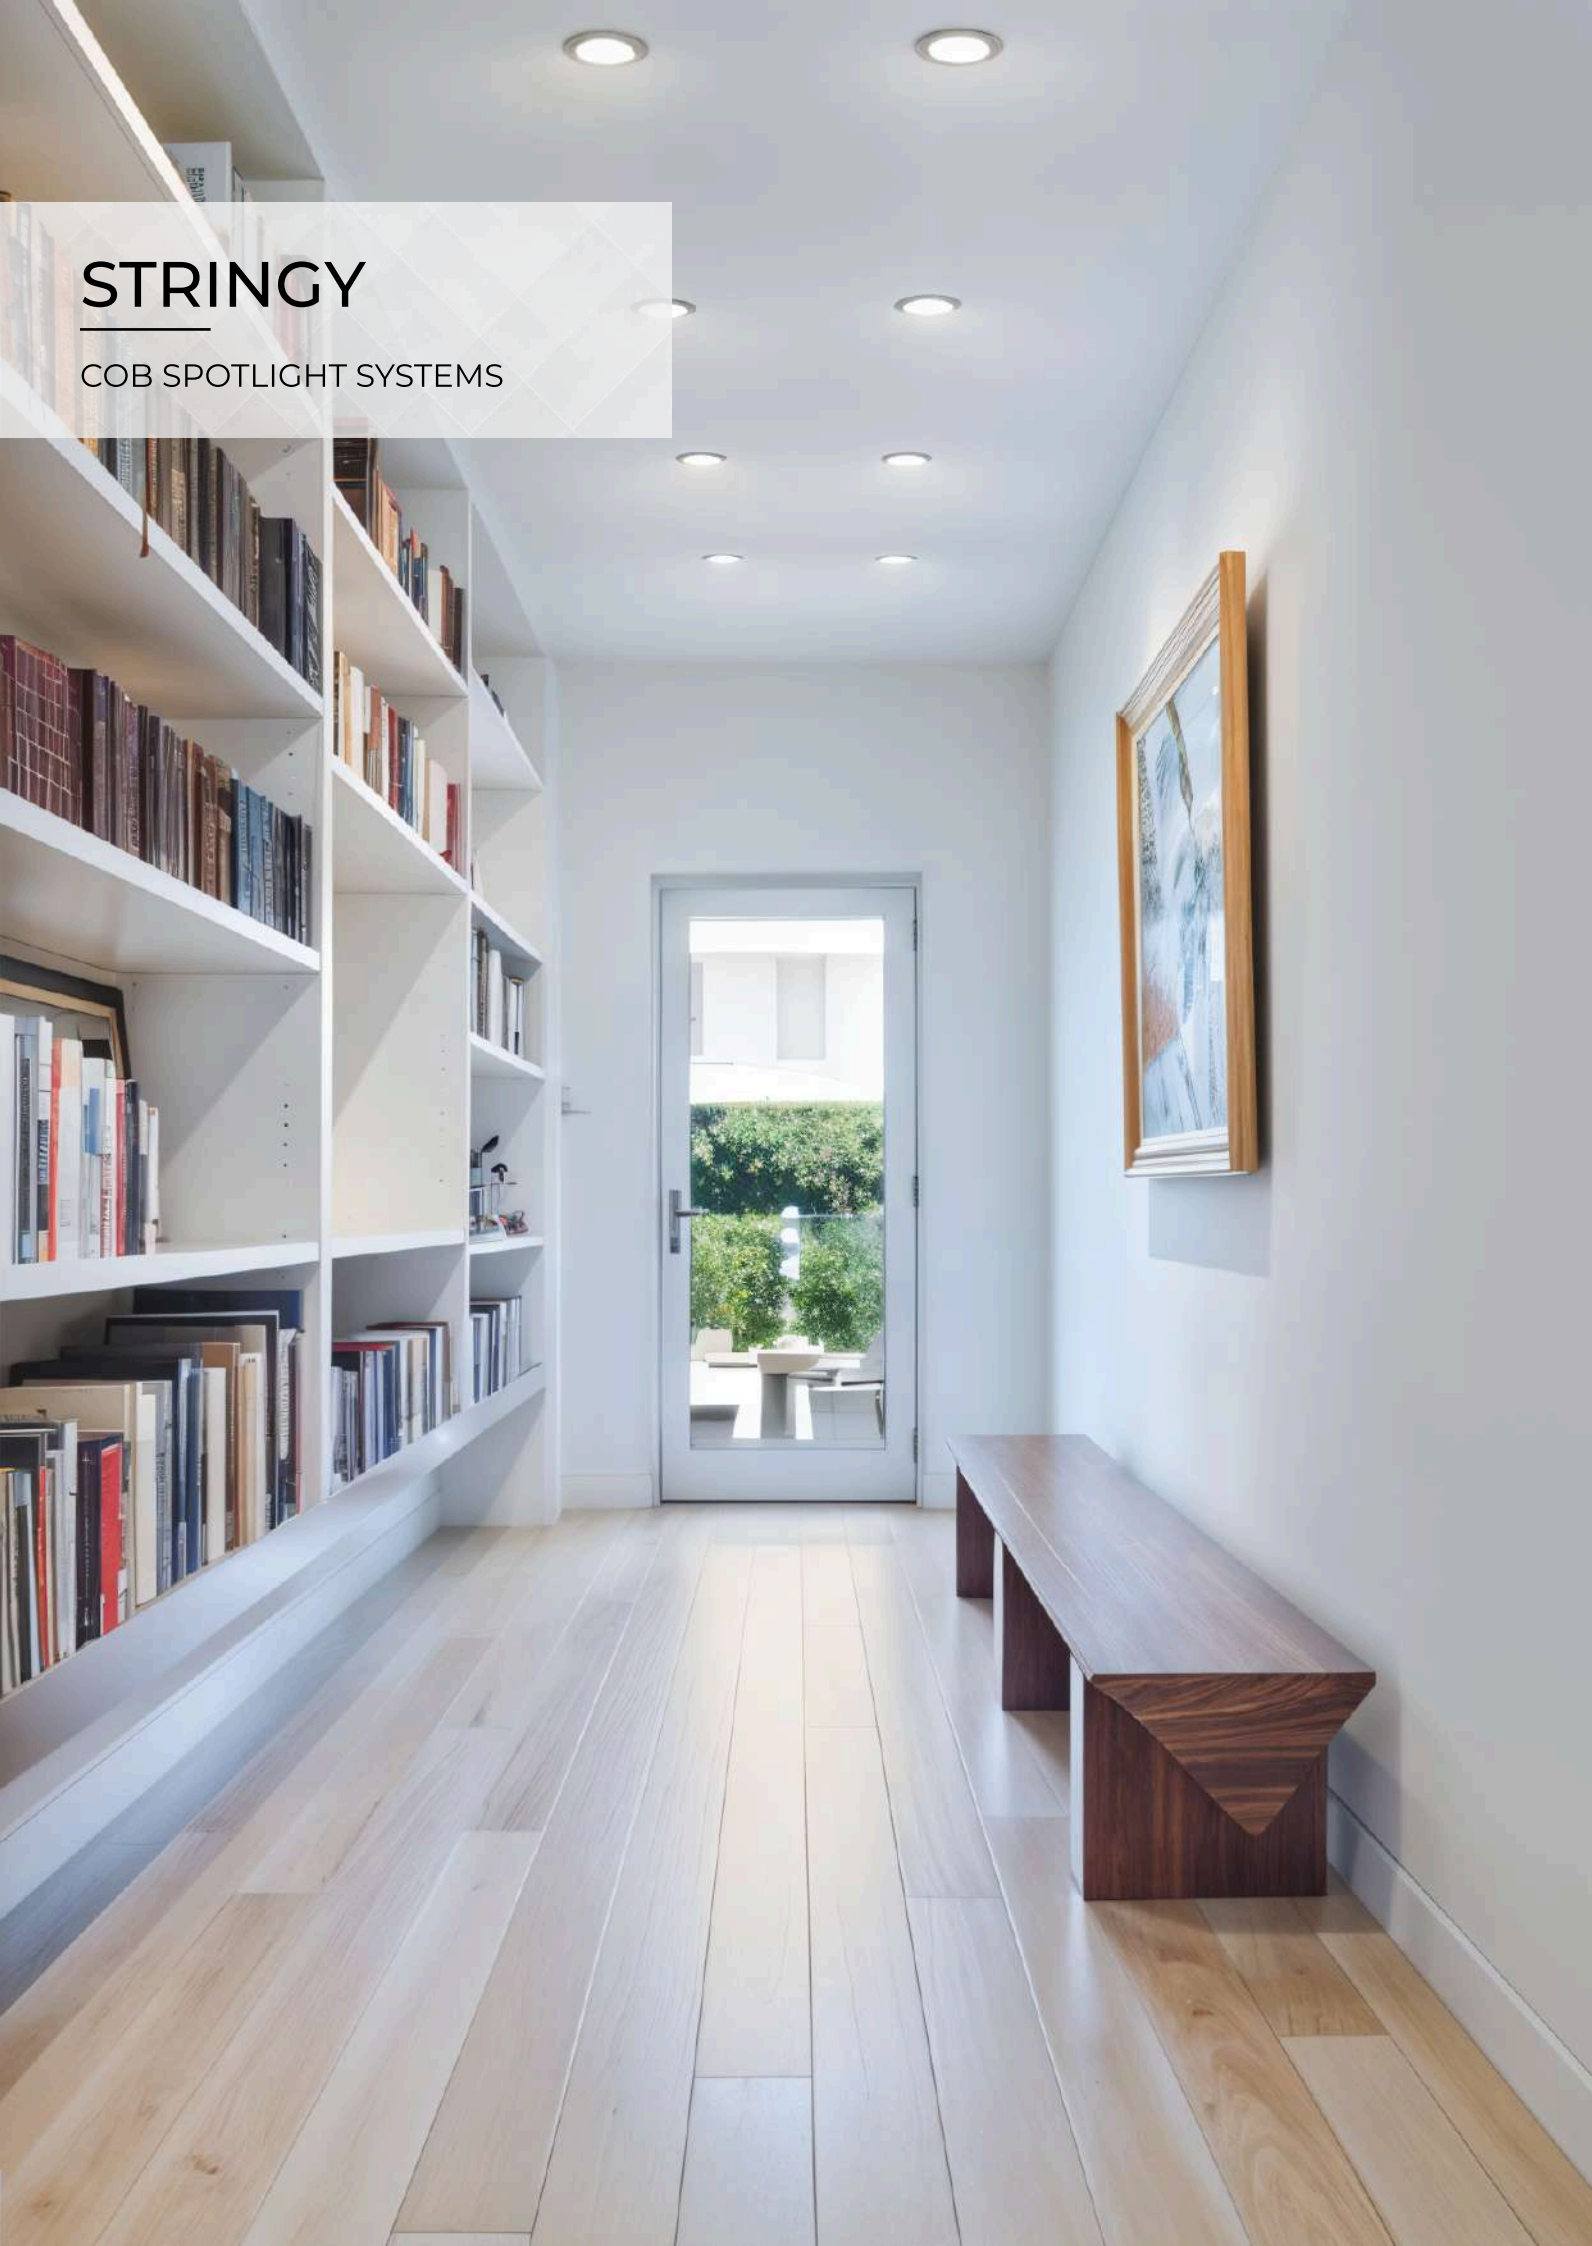


STRINGY

COB SPOTLIGHT SYSTEMS








STGY.1.12.SW.ASH.24.80.30S

Outer Size(mm) : Dia 115x106(H)
Inner Size : Dia 80mm
Cut Out Size : Dia 80mm
Wattage : 12W


STRINGY SERIES

LED	Bridgelux V8	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Sand White	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Ash	BEAM ANGLE	24°, 35°
IP RATING	IP 20	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac / Analogue / Dali (on request)
		CCT	3000k

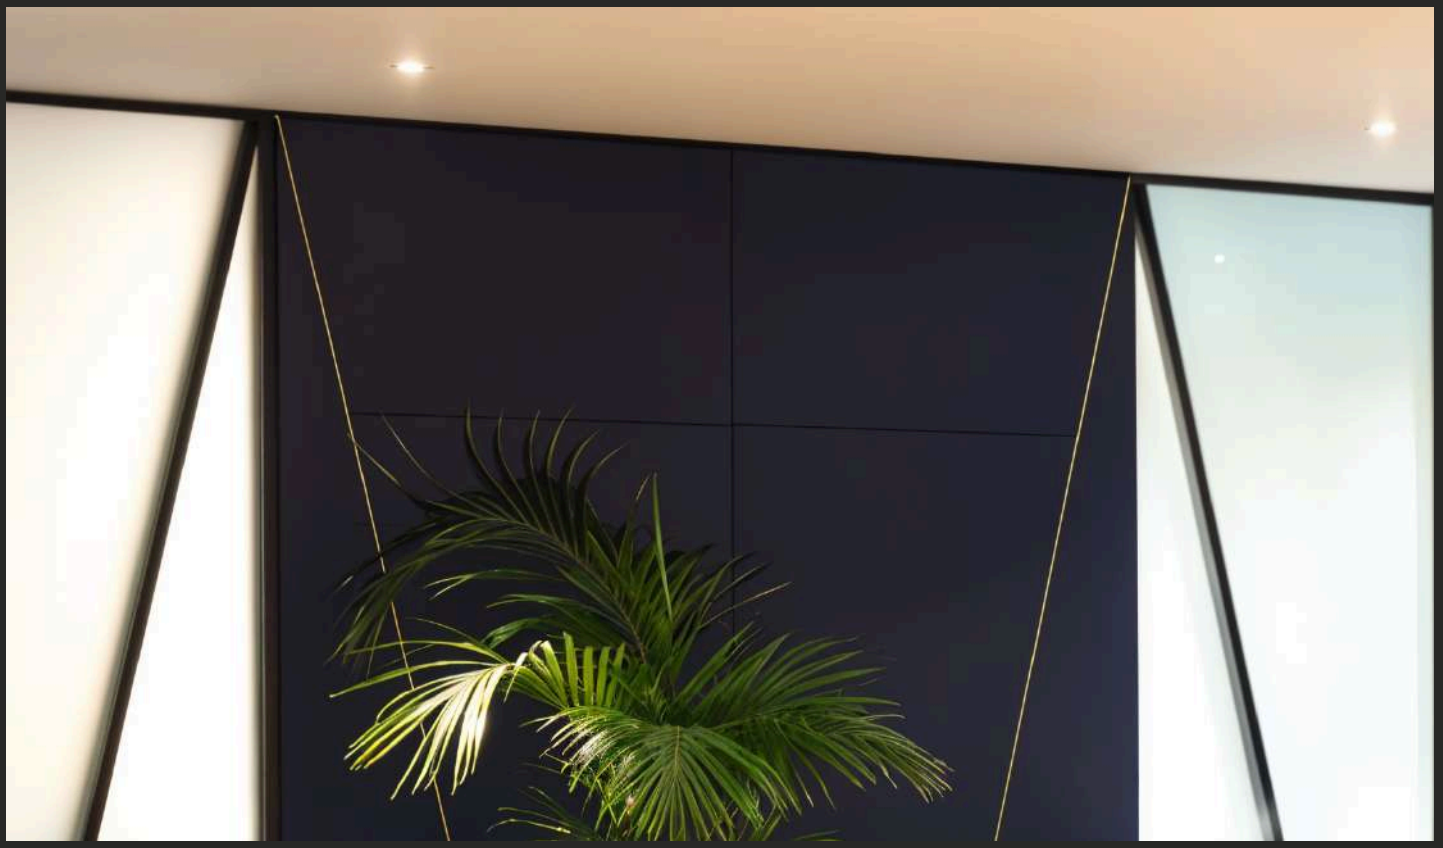

TRENTO

COB SPOTLIGHT SYSTEMS

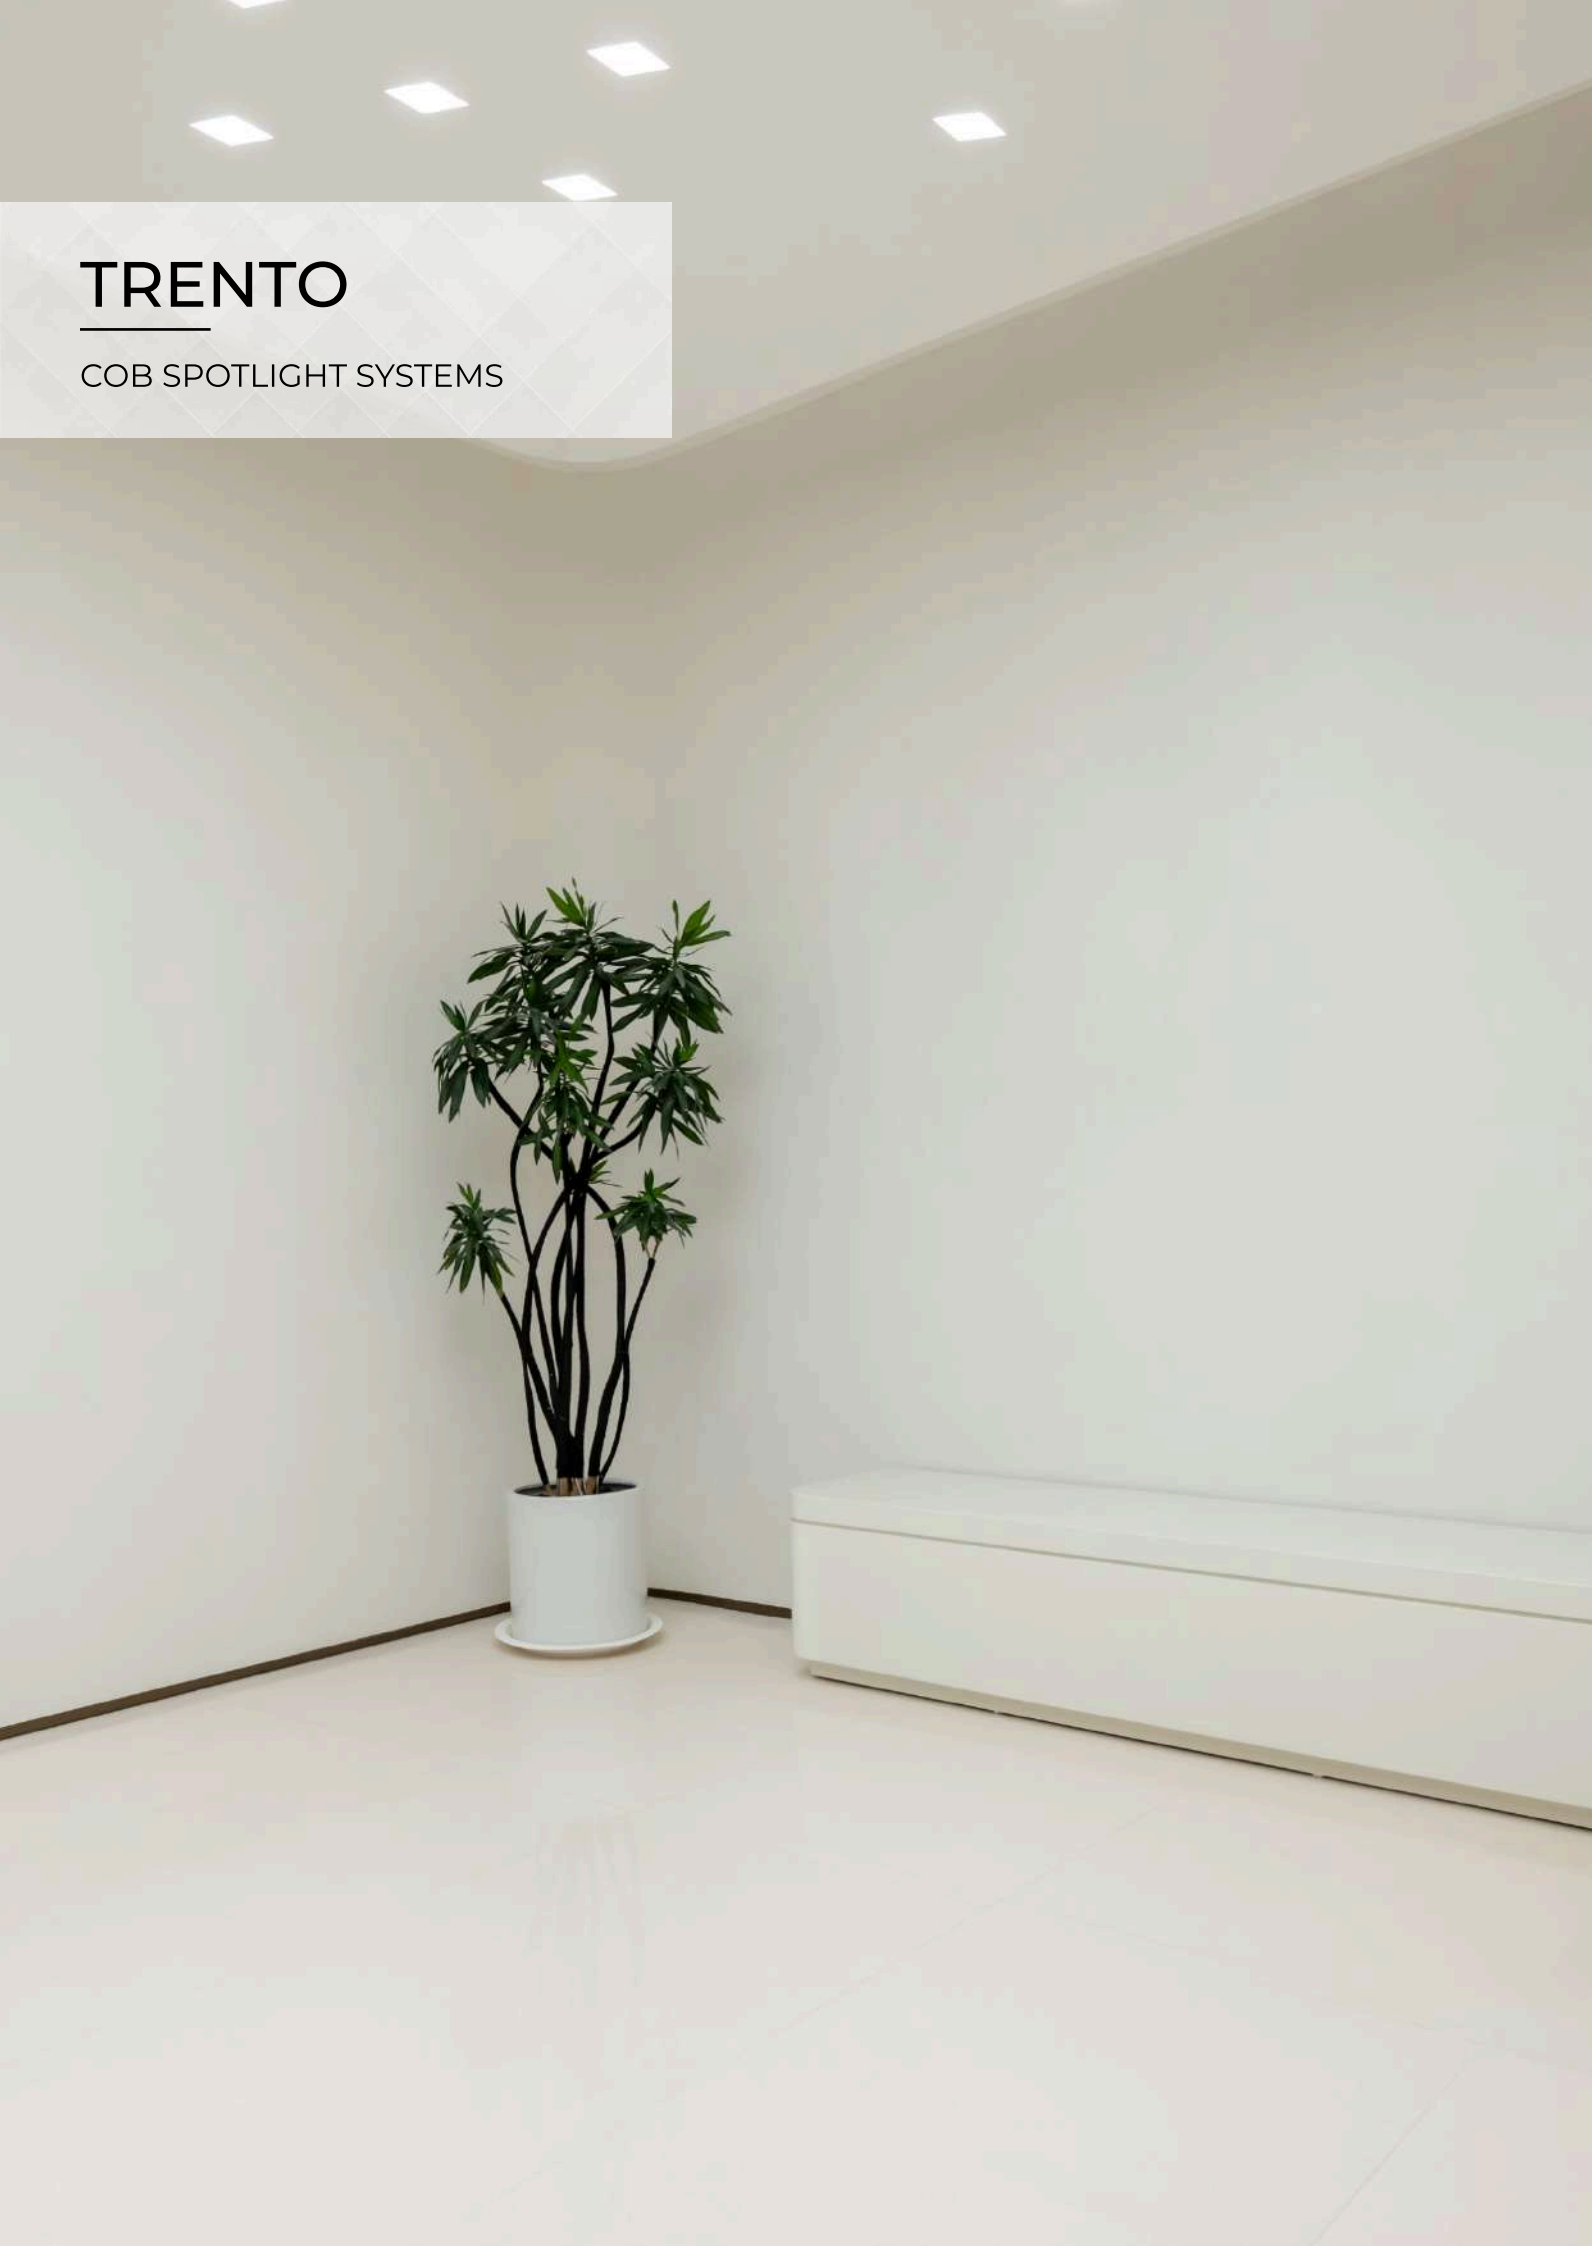




TRTO.1.18.SW.SW.35.122122.30S

Outer Size(mm) : 120(L)x185(W)x110(H)
Inner Size : 115x115mm
Cut Out Size : 122x122mm
Wattage : 18W

TRENTO SERIES

LED	Cree	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Sand White	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Sand White	BEAM ANGLE	35°
IP RATING	IP 20	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac / Analogue / Dali (on request)
		CCT	3000k

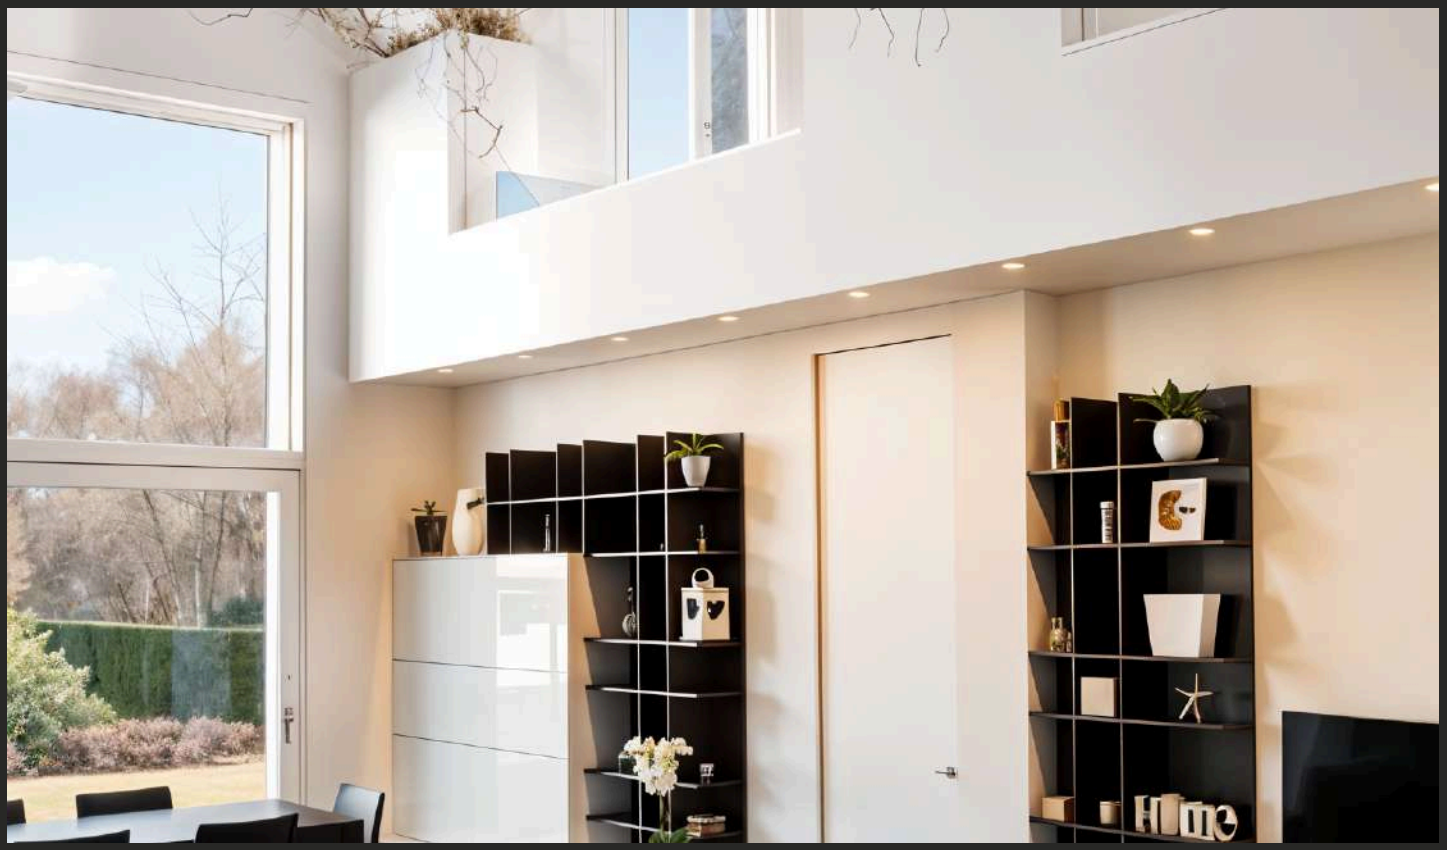




LOFTY

COB SPOTLIGHT SYSTEMS





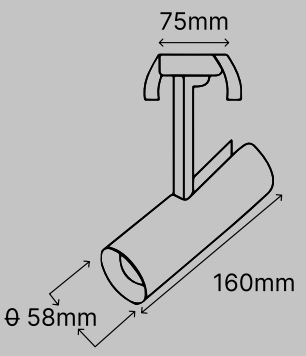

LOFTY.1.12.MB.MB.24.65.30G

Outer Size(mm)	: Dia 75x15(H)
Cylinder Size	: 58x160(L)
Cut Out Size	: 65mm
Wattage	: 12W

PRODUCT PROPERTIES

LED	Cree	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt Black	SWIVEL / FIXED	Swivel and Tilt 360°
REFLECTOR FINISH	Matt Black	BEAM ANGLE	24°
IP RATING	IP 20	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac / Analogue / Dali (on request)
		CCT	3000k





BOXY

COB SPOTLIGHT SYSTEMS




BOXY.1.03.SW.SW.08.3535.30S

Outer Size(mm) : 41(L)x41(W)x68(H)
Cut Out Size : 35x35mm
Wattage : 3W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Sand White / Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Sand White / Matt Black	BEAM ANGLE	8°
IP RATING	IP 20	DRIVER BRAND	Eaglerise
OPERATING TEMPERATURE	0-50°c	DIMMABLE	N.A.
		CCT	3000k

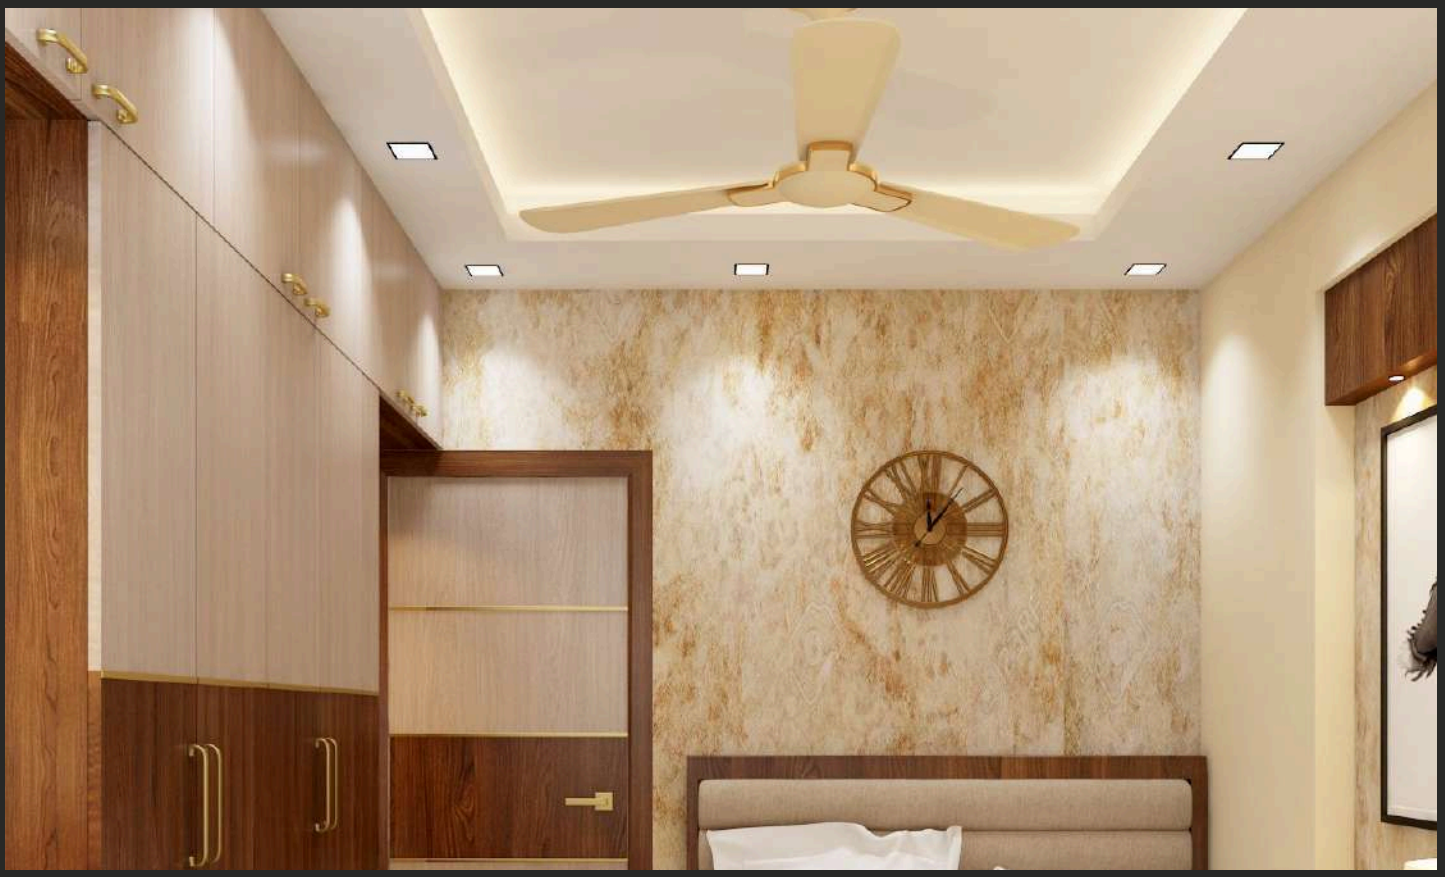



MODENA

COB SPOTLIGHT SYSTEMS




MODENA.1.03.MW.MW.24.35.30S

Outer Size(mm) : Dia 42x34(H)
Cut Out Size : Dia 35 mm
Wattage : 3W


PRODUCT PROPERTIES

LED	Cree	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt White / Matt Black	BEAM ANGLE	24°
IP RATING	IP 20	DRIVER BRAND	Eaglerise
OPERATING TEMPERATURE	0-50°c	DIMMABLE	N.A.
		CCT	3000k

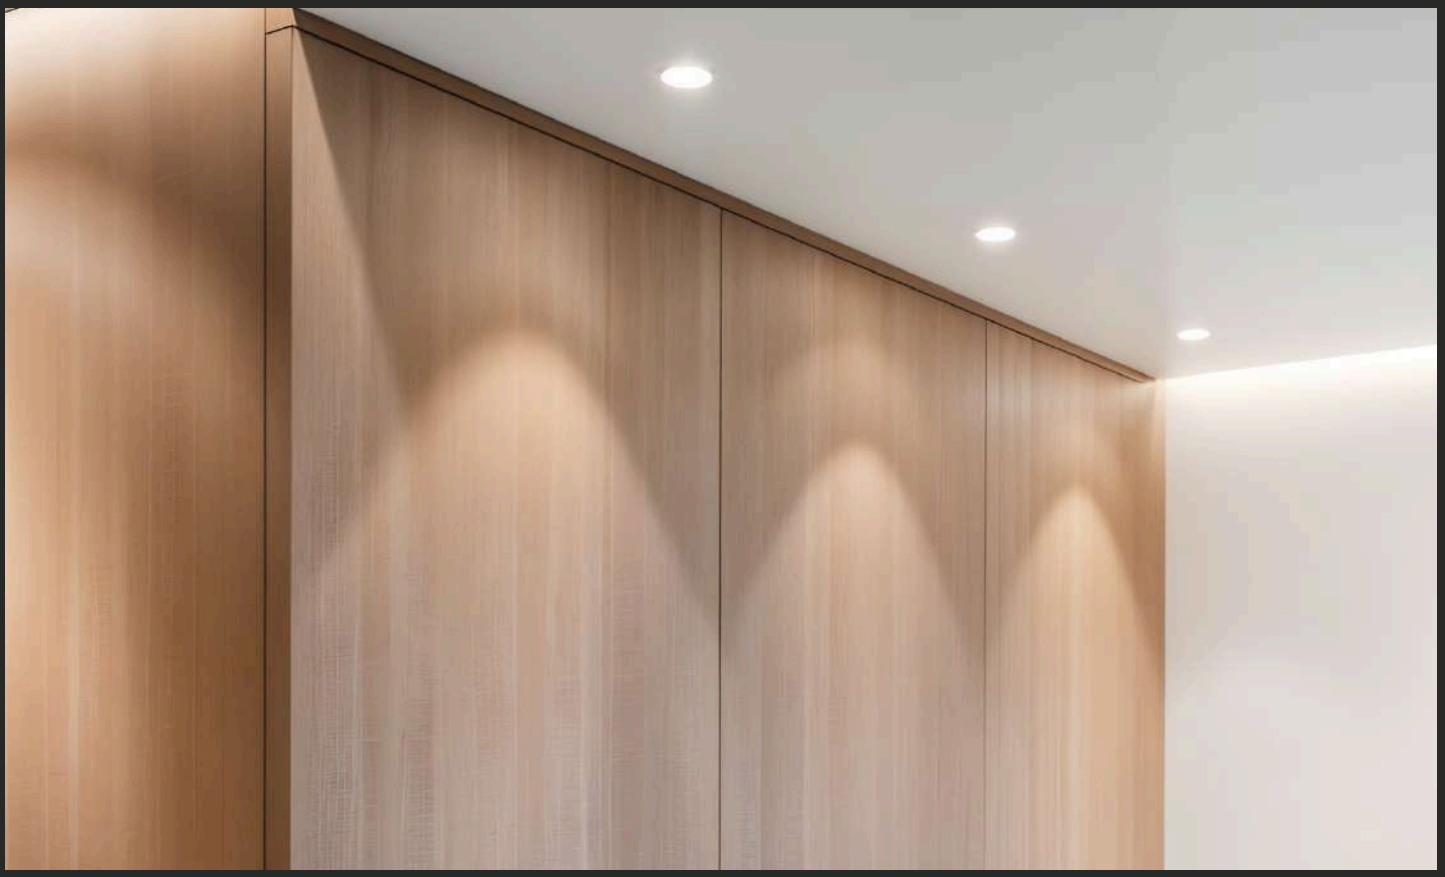






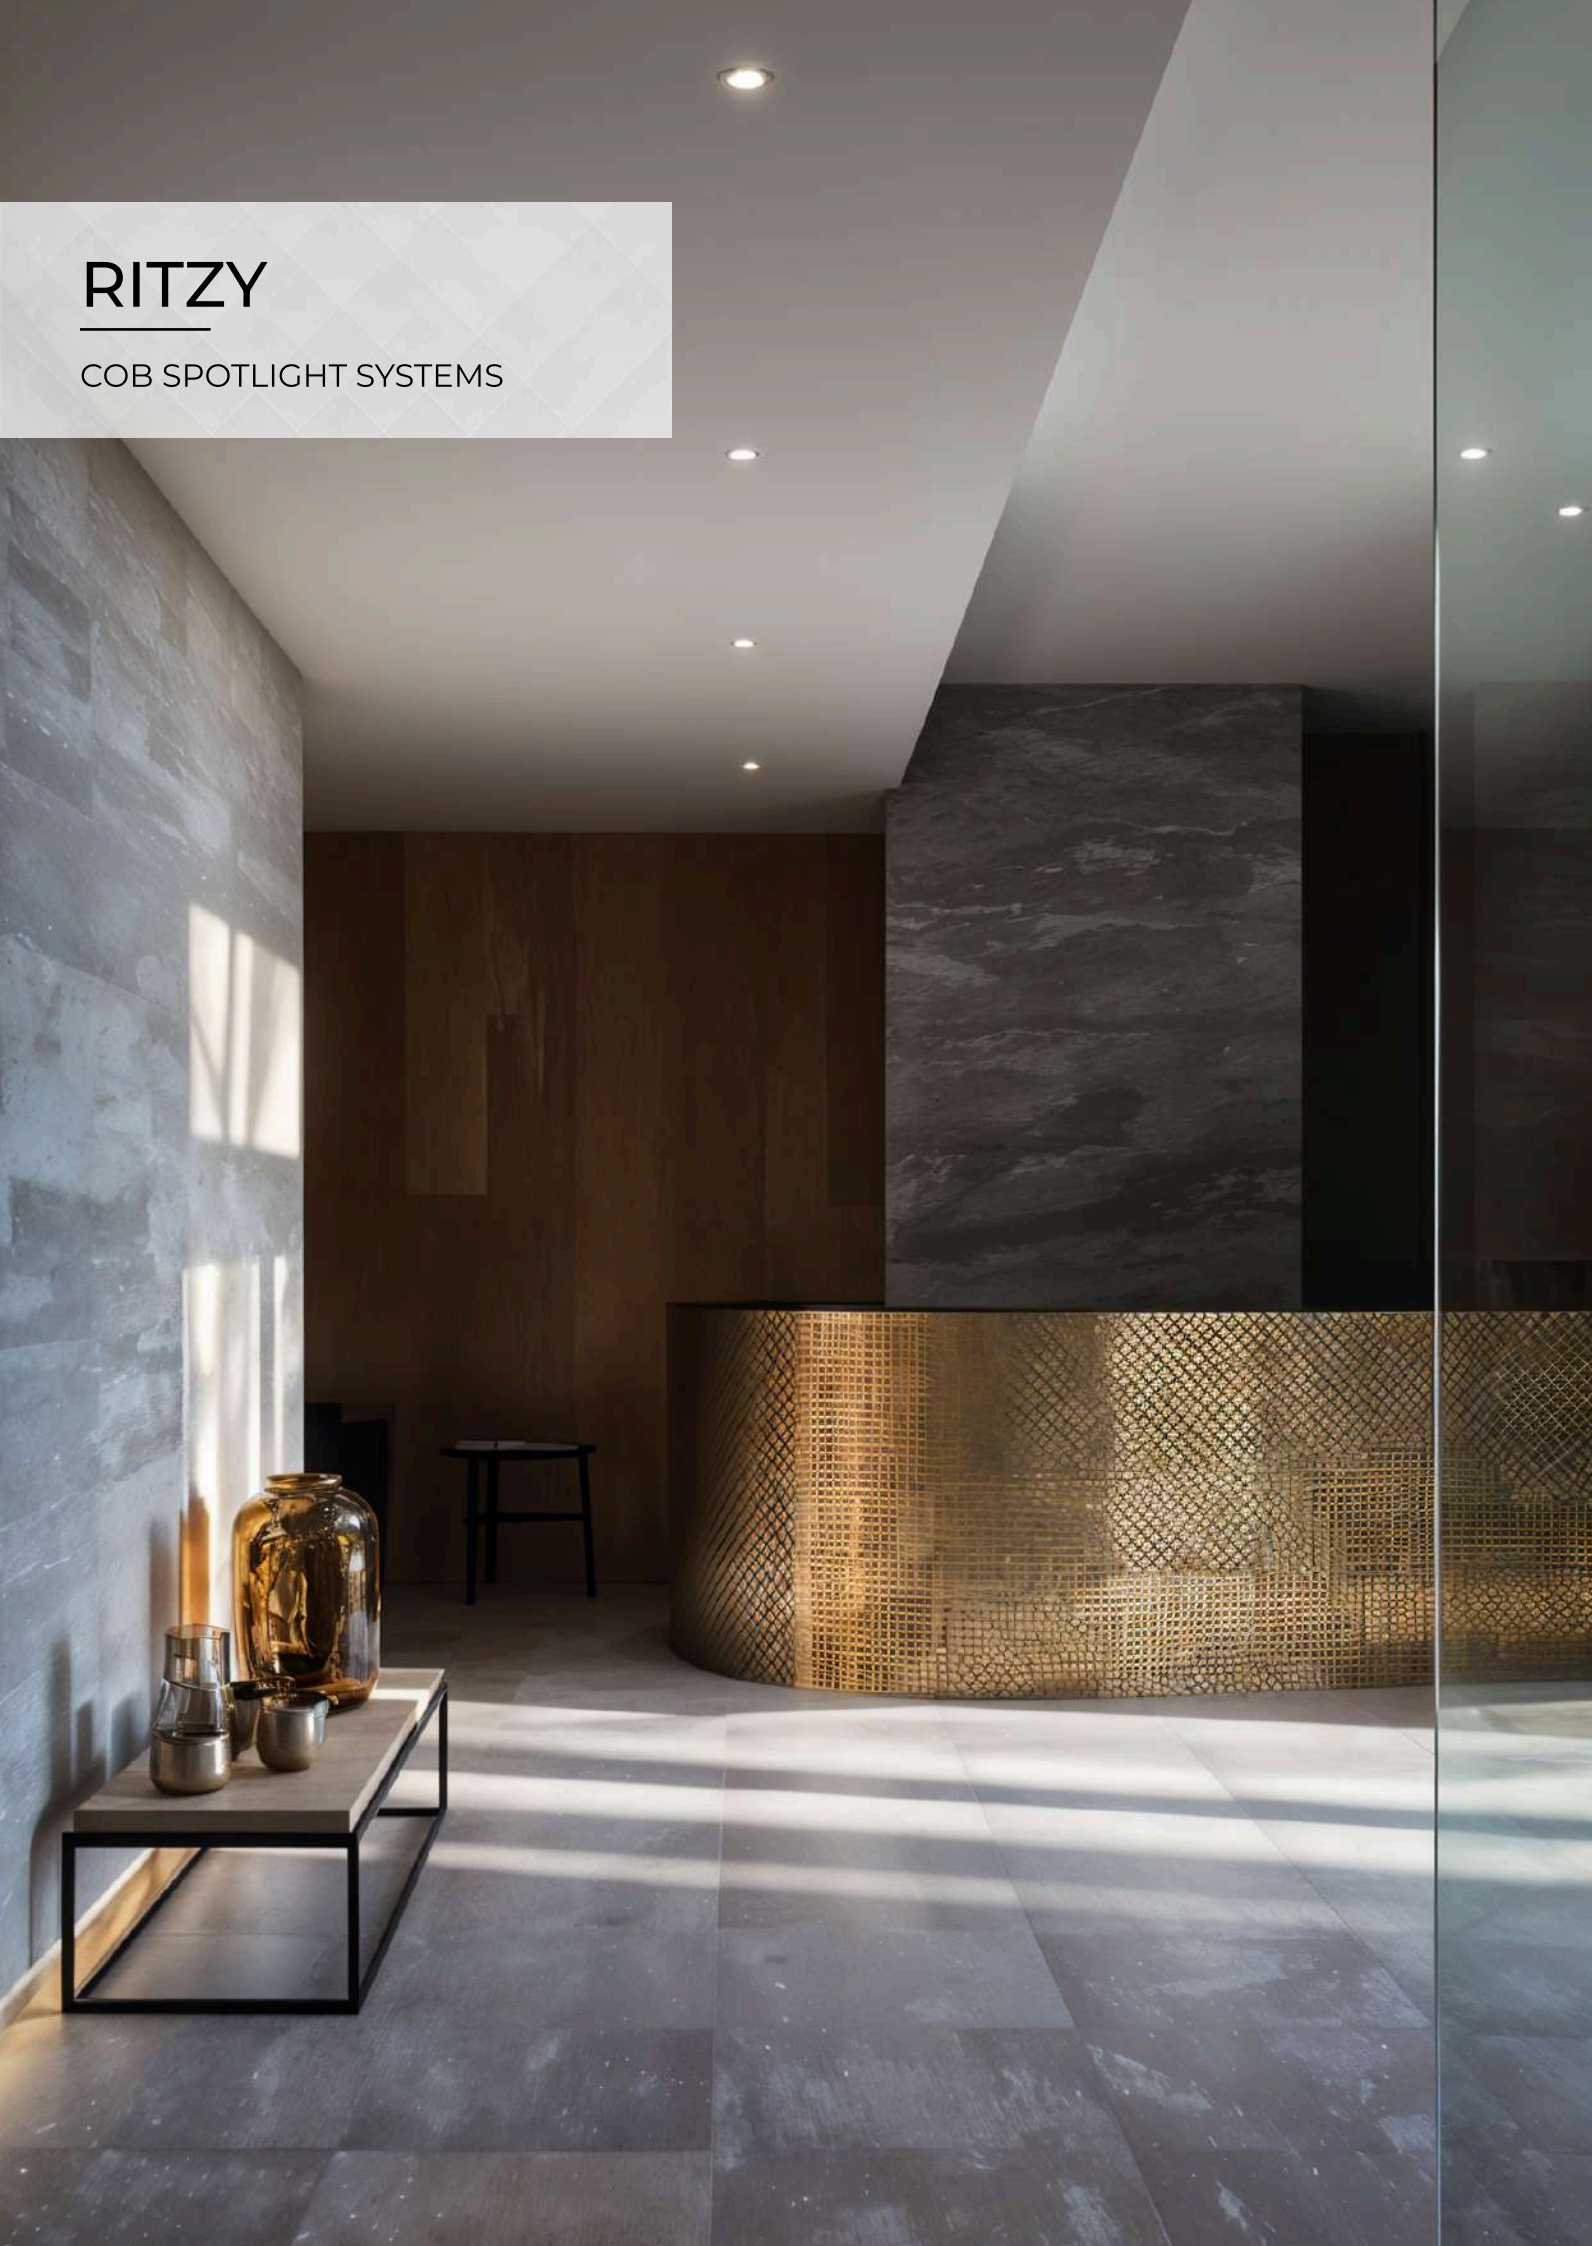


RITZY

COB SPOTLIGHT SYSTEMS







RITZY.1.03.SW.SW.08.39.30S

Outer Size(mm)	: Dia 115x56(H)
Inner Size	: Dia 39mm
Cut Out Size	: Dia 45mm
Wattage	: 3W

PRODUCT PROPERTIES

LED	Cree	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Sand White / Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Sand White / Matt Black	BEAM ANGLE	8°
IP RATING	IP 20	DRIVER BRAND	Eaglerise
OPERATING TEMPERATURE	0-50°c	DIMMABLE	N.A.
		CCT	3000k





DREAMY WALL WASHER

COB SPOTLIGHT SYSTEMS



DRWW.1.8.MW.SL.WW.75.30S

Outer Size(mm) : Dia 85x70(H)
Cut Out Size : Dia 75mm
Wattage : 8W




DRWW.1.12.MW.SL.WW.75.30S

Outer Size(mm) : Dia 85x70(H)
Cut Out Size : Dia 75mm
Wattage : 12W


PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt Black / Matt White	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Silver	BEAM ANGLE	Wall Washer
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Osram
		CCT	2700k, 3000k, 3500k, 4000k, 5000k, 5700k, 6500k

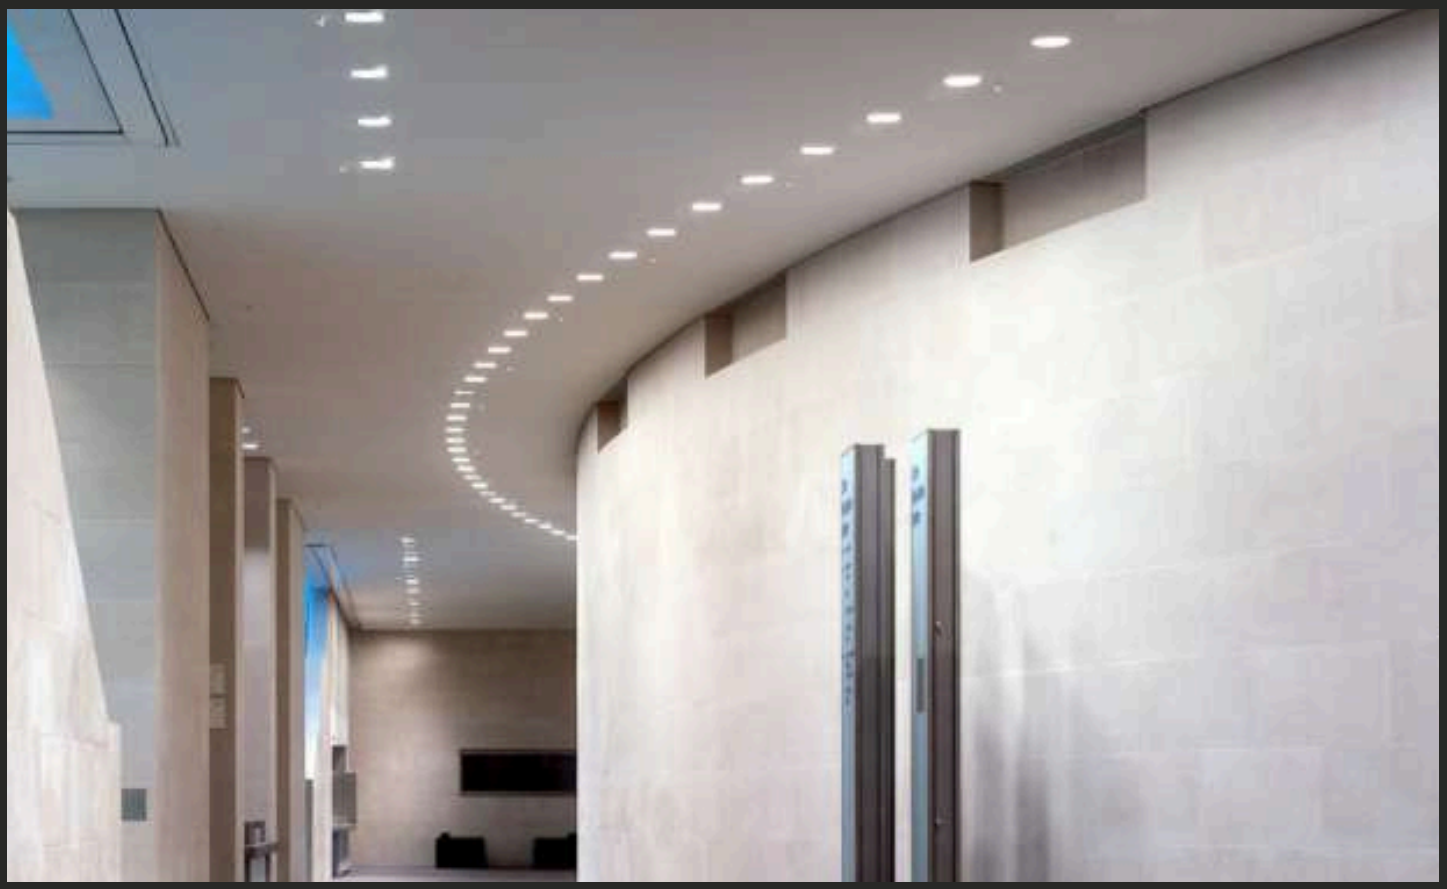

MINI DREAMY WALL WASHER

COB SPOTLIGHT SYSTEMS

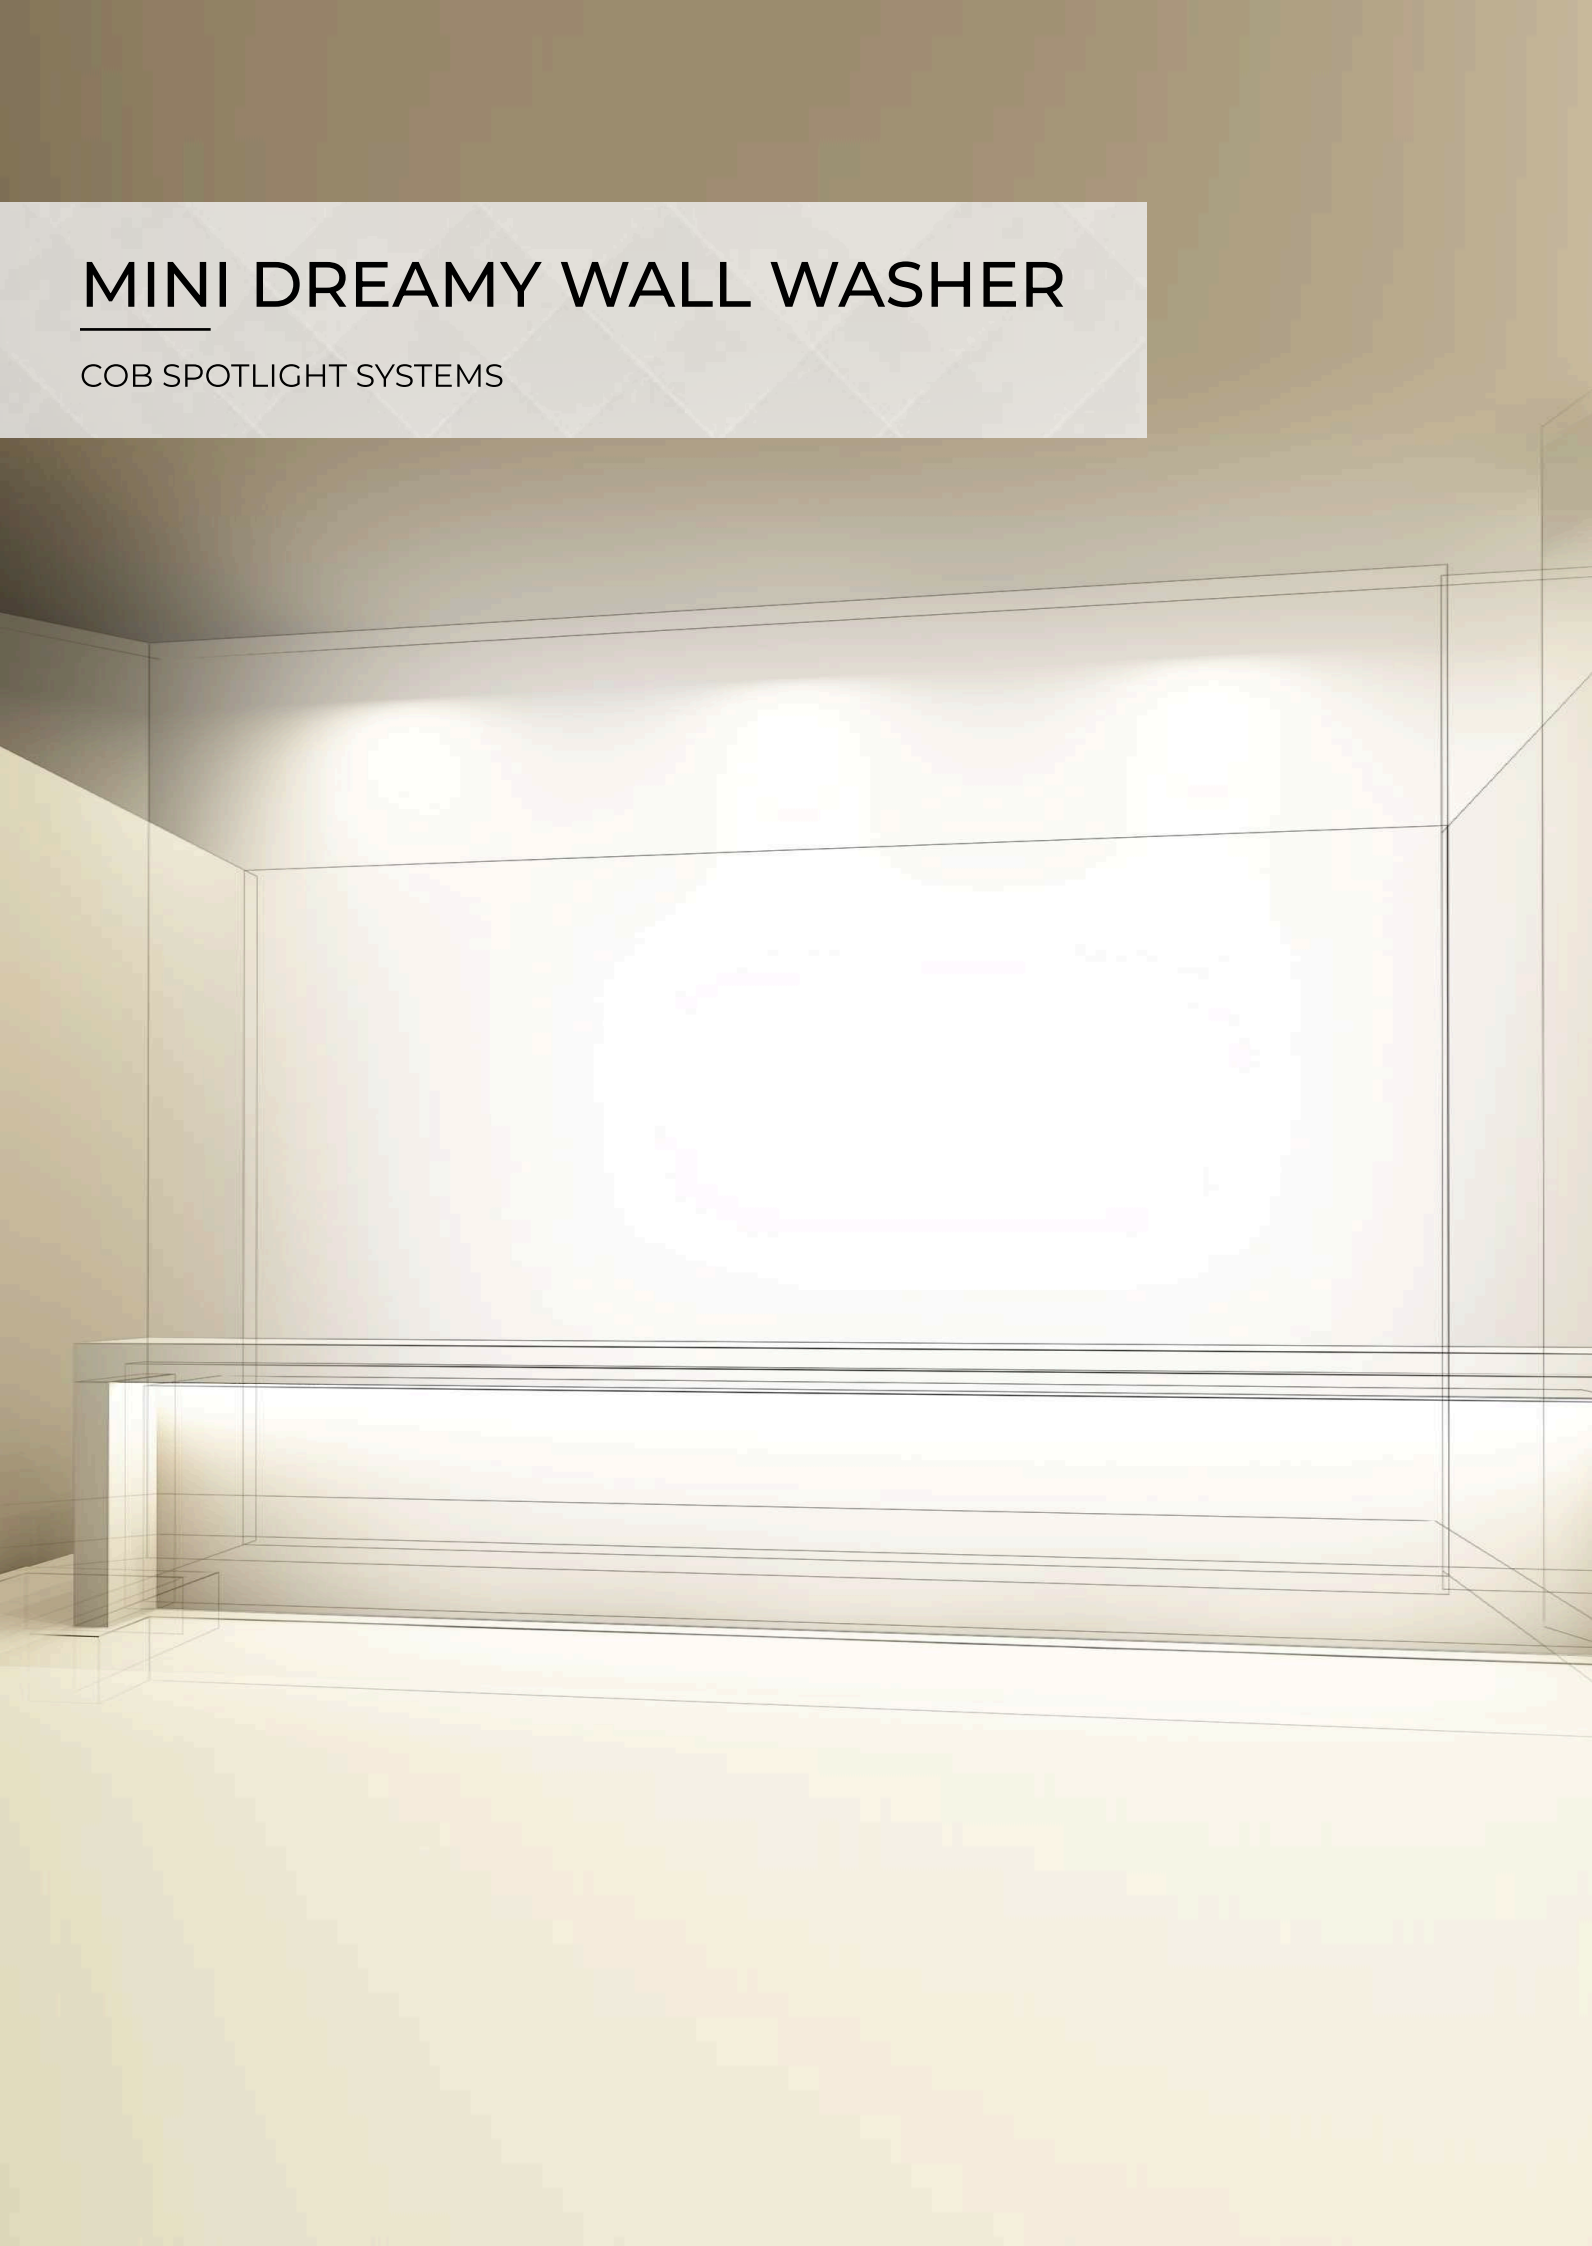




MINI DRWW.1.10.MW.MW.WW.52.30S

Outer Size(mm) : 65(L)x72(H)
Cut Out Size : 52mm
Wattage : 10W

PRODUCT PROPERTIES


LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	240V / 50Hz	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt White / Matt Black	BEAM ANGLE	Wall Wash
IP RATING	IP 20	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac / Analogue / Dali (on request)
		CCT	3000k, 4000k, 6500k

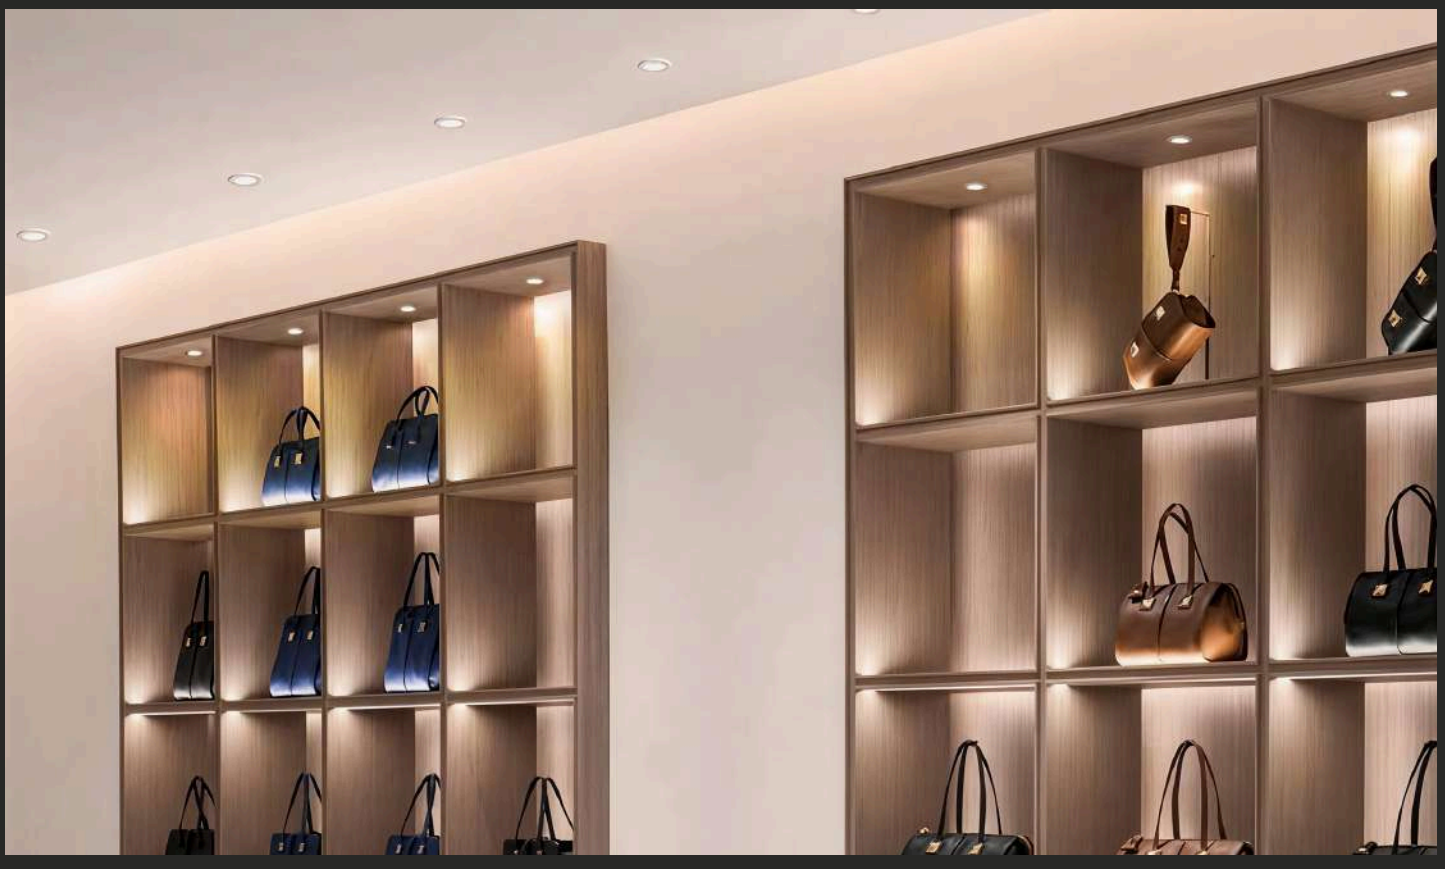



CUBIK

COB SPOTLIGHT SYSTEMS

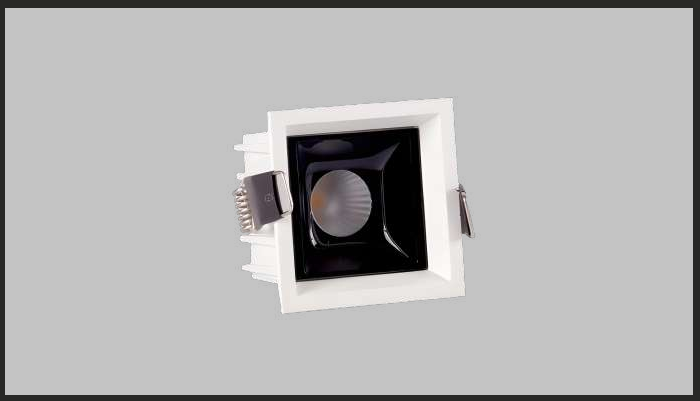

CUBIK.1.8.MW.MB.45.6060.30S

Outer Size(mm) : 70(L)x70(W)x60(H)
Cut Out Size : 60x60mm
Wattage : 8W
Reflector : Matt Black/ Rose Gold/ Gold



CUBIK.1.15.MW.MB.36.8080.30S

Outer Size(mm) : 90(L)x90(W)x75(H)
Cut Out Size : 80x80mm
Wattage : 15W
Reflector : Matt Black/ Rose Gold



CUBIK.2.16.MW.MB.36.11060.30S

Outer Size(mm) : 120(L)x70(W)x60(H)
Cut Out Size : 110x60mm
Wattage : 16W
Reflector : Matt Black, Rose Gold, Gold



CUBIK.3.24.MW.MB.36.15260.30S

Outer Size(mm) : 162(L)x70(W)x60(H)
Cut Out Size : 152x60mm
Wattage : 24W
Reflector : Matt Black



CUBIK.2.30.MW.MB.36.15080.30S

Outer Size(mm) : 160(L)x90(W)x75(H)
Cut Out Size : 150x80mm
Wattage : 30W
Reflector : Matt Black/ Rose Gold

PRODUCT PROPERTIES

LED	Osram
INPUT VOLTAGE	220-240V ac
PRODUCT FINISH	Matt White / Matt Black
REFLECTOR FINISH	As Per Model
IP RATING	IP 20
OPERATING TEMPERATURE	0-50°c
HOUSING MATERIAL	Aluminium Die Cast
CRI	>90
SWIVEL/FIXED	Fixed
BEAM ANGLE	36°, 45°
DRIVER BRAND	Osram
DIMMABLE	Triac / Analogue / Dali (on request)
CCT	2700k, 3000k, 3500k, 4000k, 5000k, 5700k, 6500k



EDGE

COB SPOTLIGHT SYSTEMS



EDGE.1.7.MW.RG.25.60.30S

Outer Size(mm) : Dia 64x59(H)
Cut Out Size : Dia 60mm
Wattage : 7W



EDGE.1.12.MW.RG.38.76.30S

Outer Size(mm) : Dia 81x70(H)
Cut Out Size : Dia 76mm
Wattage : 12W



EDGE.1.15.MW.RG.38.76.30S

Outer Size(mm) : Dia 81x85(H)
Cut Out Size : Dia 76mm
Wattage : 15W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Nickel / Gold / Champagne / Rose Gold / Chrome / Matt Silver	BEAM ANGLE	25°, 38°
		DIMMABLE	Triac / Analogue / Dali (on request)
IP RATING	IP 20		
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Osram
		CCT	2700k, 3000k, 3500k, 4000k, 5000k, 5700k, 6500k

RAZOR

COB SPOTLIGHT SYSTEMS





RAZOR.1.5.MW.MB.38.34.30S

Outer Size(mm) : Dia 40x60(H)
Cut Out Size : Dia 34mm
Wattage : 5W



RAZOR.1.10.MW.MB.38.55.30S

Outer Size(mm) : Dia 60x82(H)
Cut Out Size : Dia 55mm
Wattage : 10W



RAZOR.1.15.MW.MB.38.70.30S


Outer Size(mm) : Dia 75x100(H)
Cut Out Size : Dia 70mm
Wattage : 15W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt White / Matt Black / Rose Gold	SWIVEL / FIXED	Fixed
		BEAM ANGLE	25°, 38°
REFLECTOR FINISH	Matt White, Matt Black, Rose Gold, Grey, Gold	DIMMABLE	Triac / Analogue / Dali (on request)
IP RATING	IP 20	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	CCT	2700k, 3000k, 3500k, 4000k, 5000k, 5700k, 6500k

PHANTOM

COB SPOTLIGHT SYSTEMS

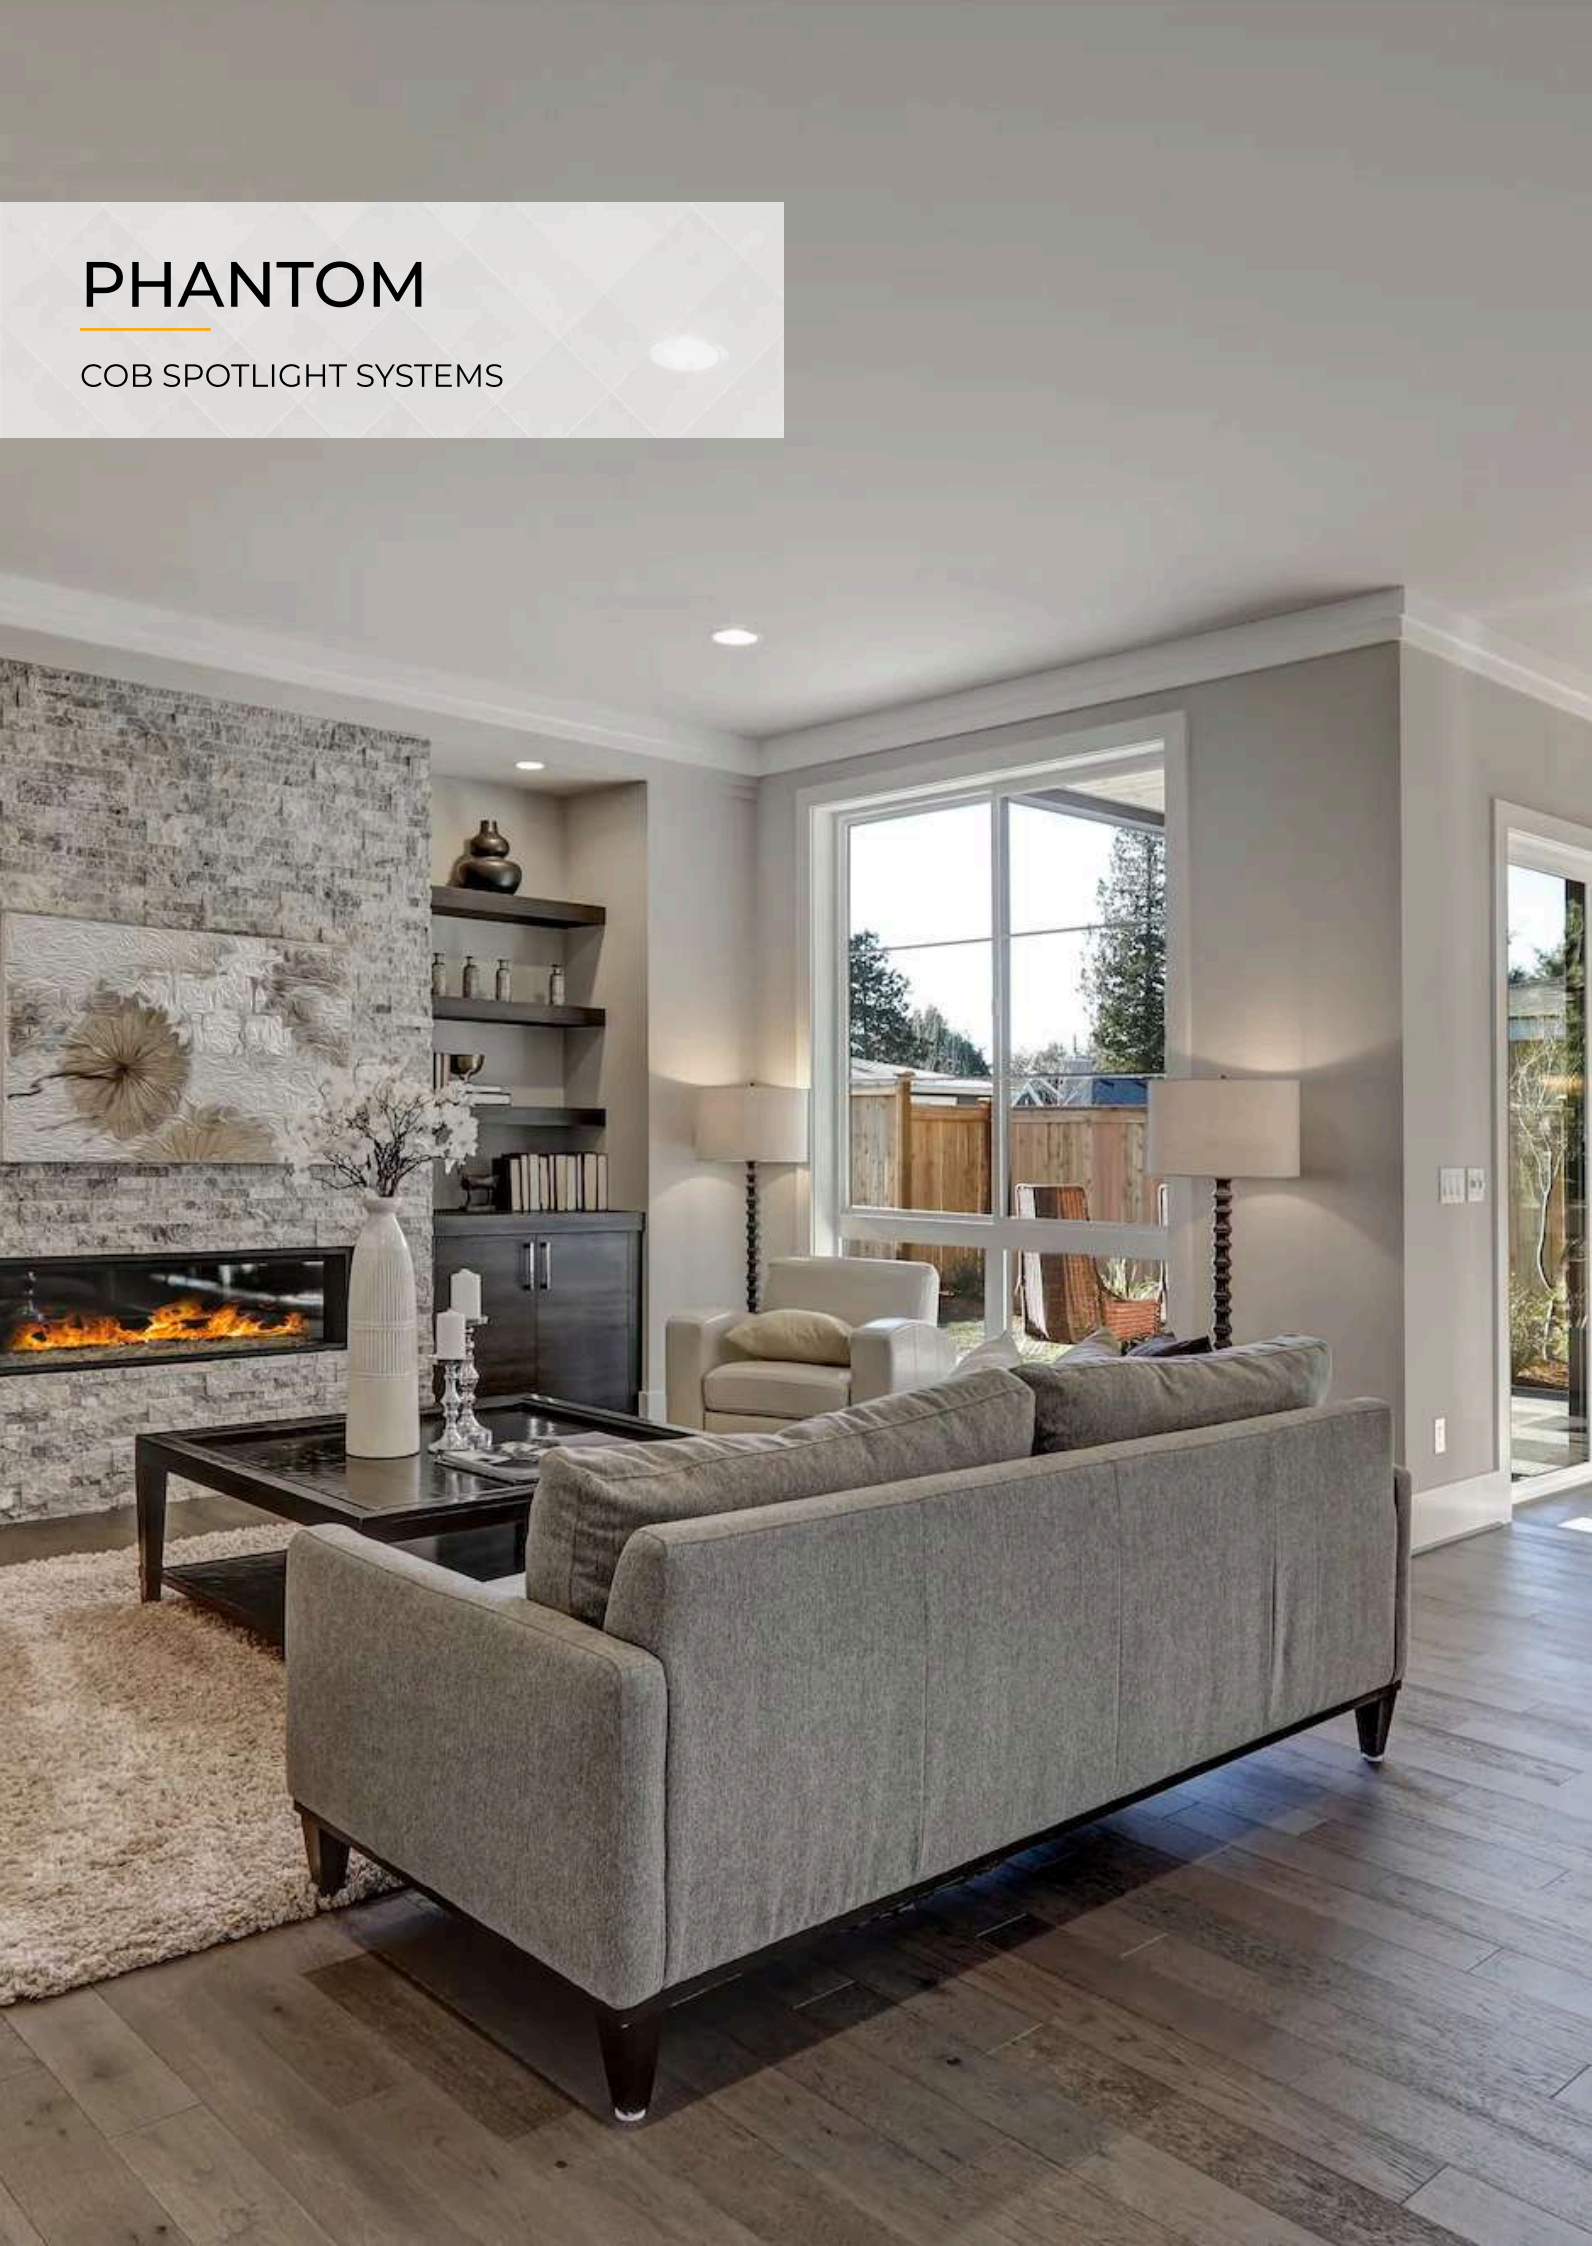



PHANTOM.1.7.MW.NI.36.54.30S

Outer Size(mm) : Dia 62x75(H)
Cut Out Size : Dia 54mm
Wattage : 7W



PHANTOM.1.12.MW.NI.36.73.30S

Outer Size(mm) : Dia 82x97(H)
Cut Out Size : Dia 73mm
Wattage : 12W



PHANTOM.1.17.MW.NI.36.73.30S


Outer Size(mm) : Dia 82x97(H)
Cut Out Size : Dia 73mm
Wattage : 17W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt White/ Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Nickel	BEAM ANGLE	36°
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Osram
		CCT	3000k, 4000k

SHADOW

COB SPOTLIGHT SYSTEMS

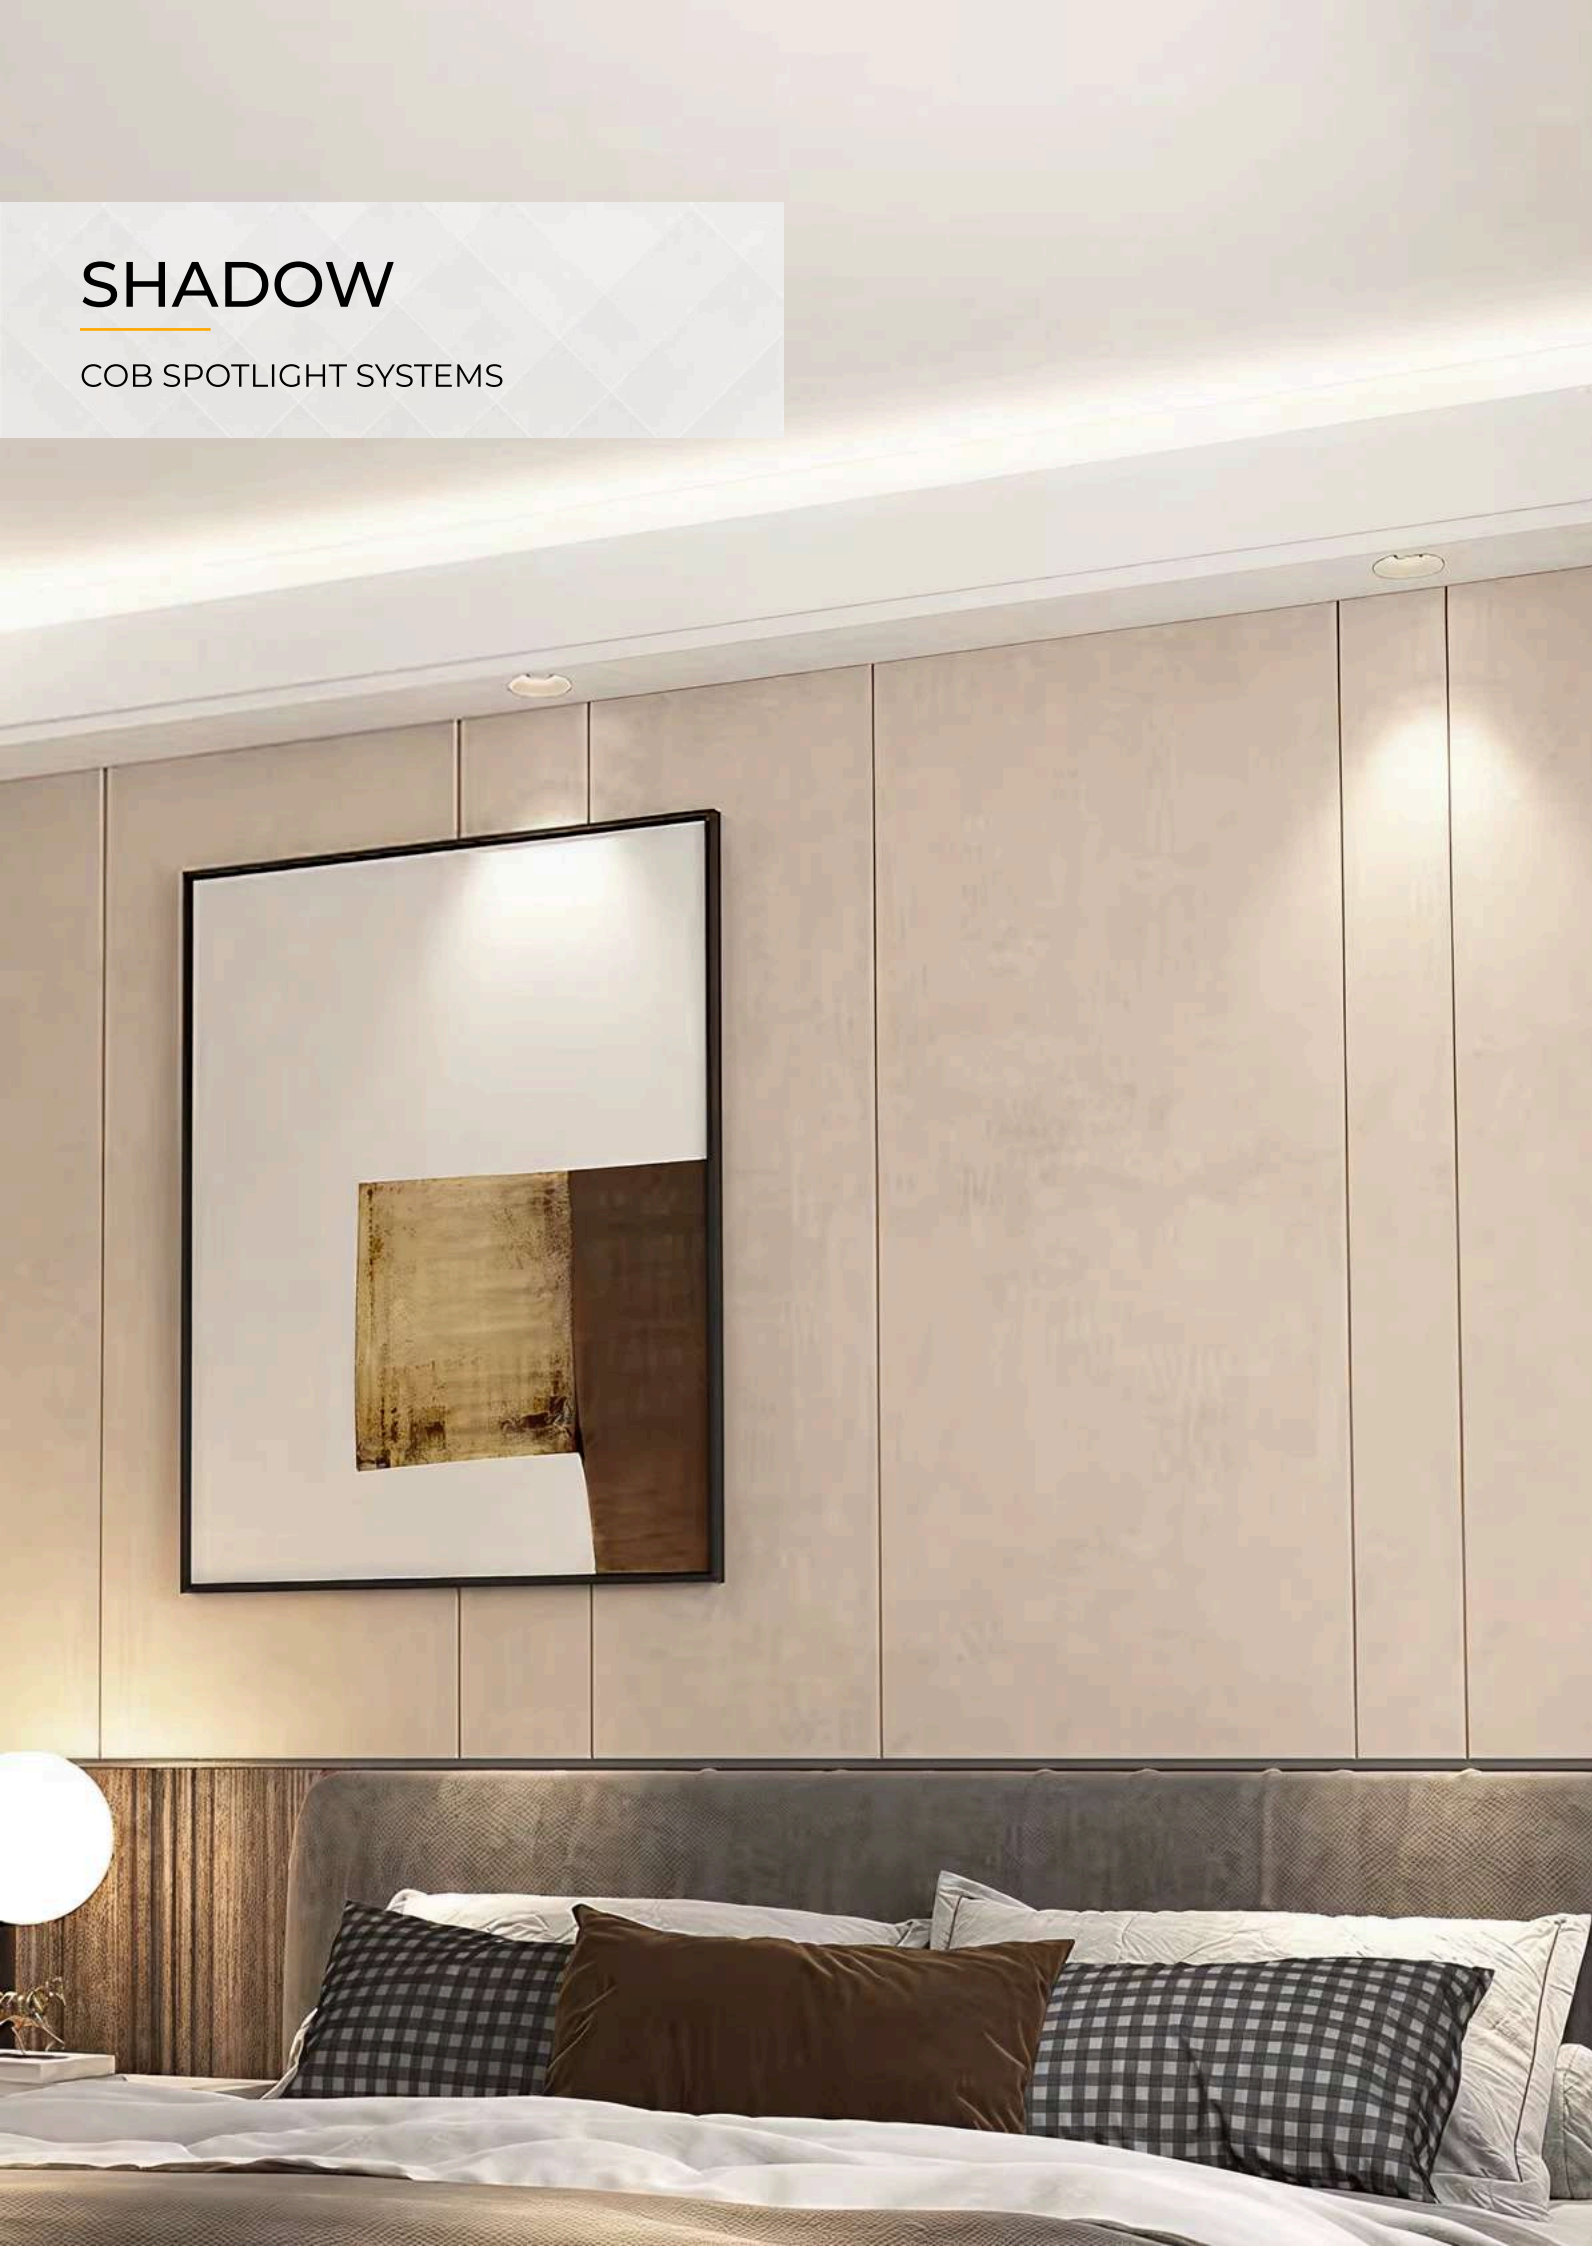



SHADOW.1.3.MW.GB.24.32.30G

Outer Size(mm) : Dia 40x30(H)
Cut Out Size : Dia 32mm
Wattage : 3W



SHADOW.1.7.MW.GB.24.56.30G

Outer Size(mm) : Dia 64x62(H)
Cut Out Size : Dia 56mm
Wattage : 7W




SHADOW.1.12.MW.GB.36.65.30G

Outer Size(mm) : Dia 74x70(H)
Cut Out Size : Dia 65mm
Wattage : 12W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt White / Gloss Black	BEAM ANGLE	15°, 24°, 36°
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Eaglerises / Osram
		CCT	3000k, 4000k

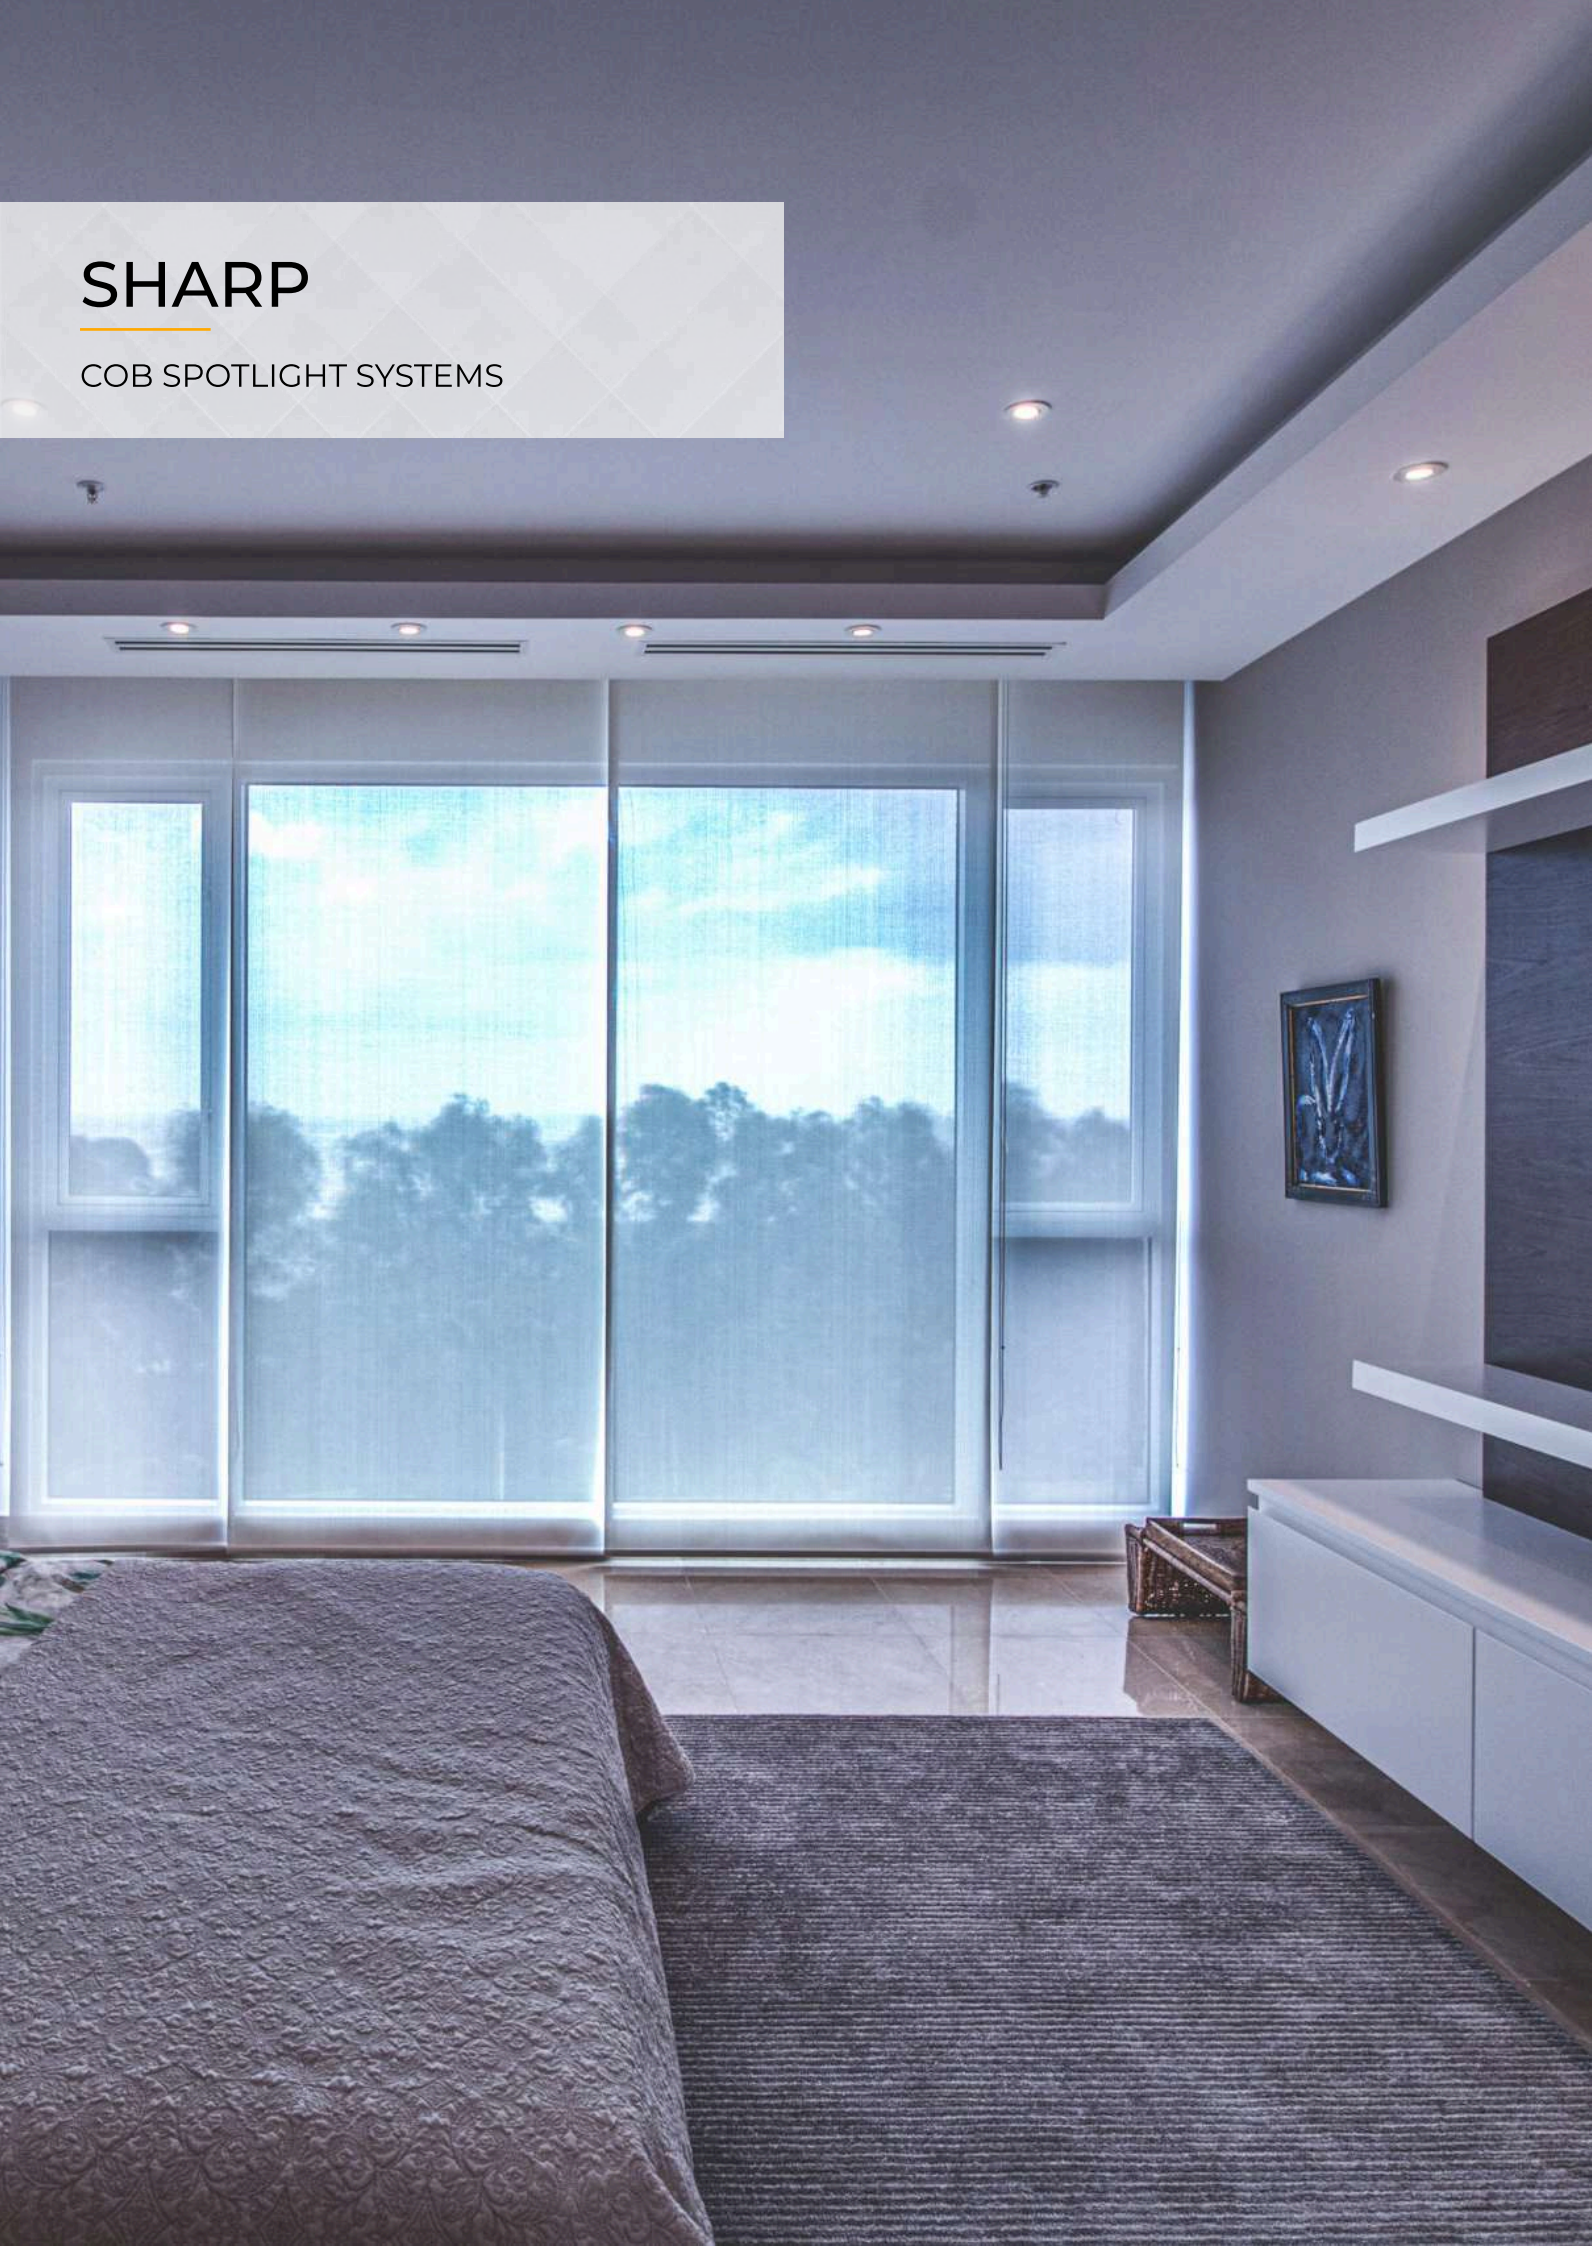

SHARP

COB SPOTLIGHT SYSTEMS



SHARP.1.7.MW.MW.25.56.30S

Outer Size(mm) : Dia 68x60(H)
Cut Out Size : Dia 56mm
Wattage : 7W



SHARP.1.12.MW.MW.38.68.30S

Outer Size(mm) : Dia 76x60(H)
Cut Out Size : Dia 68mm
Wattage : 12W




SHARP.1.15.MW.MW.38.68.30S

Outer Size(mm) : Dia 76x75(H)
Cut Out Size : Dia 68mm
Wattage : 15W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt White / Matt Black	BEAM ANGLE	25°, 38°
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Osram
		CCT	2700k, 3000k, 3500k, 4000k, 5000k, 5700k, 6500k

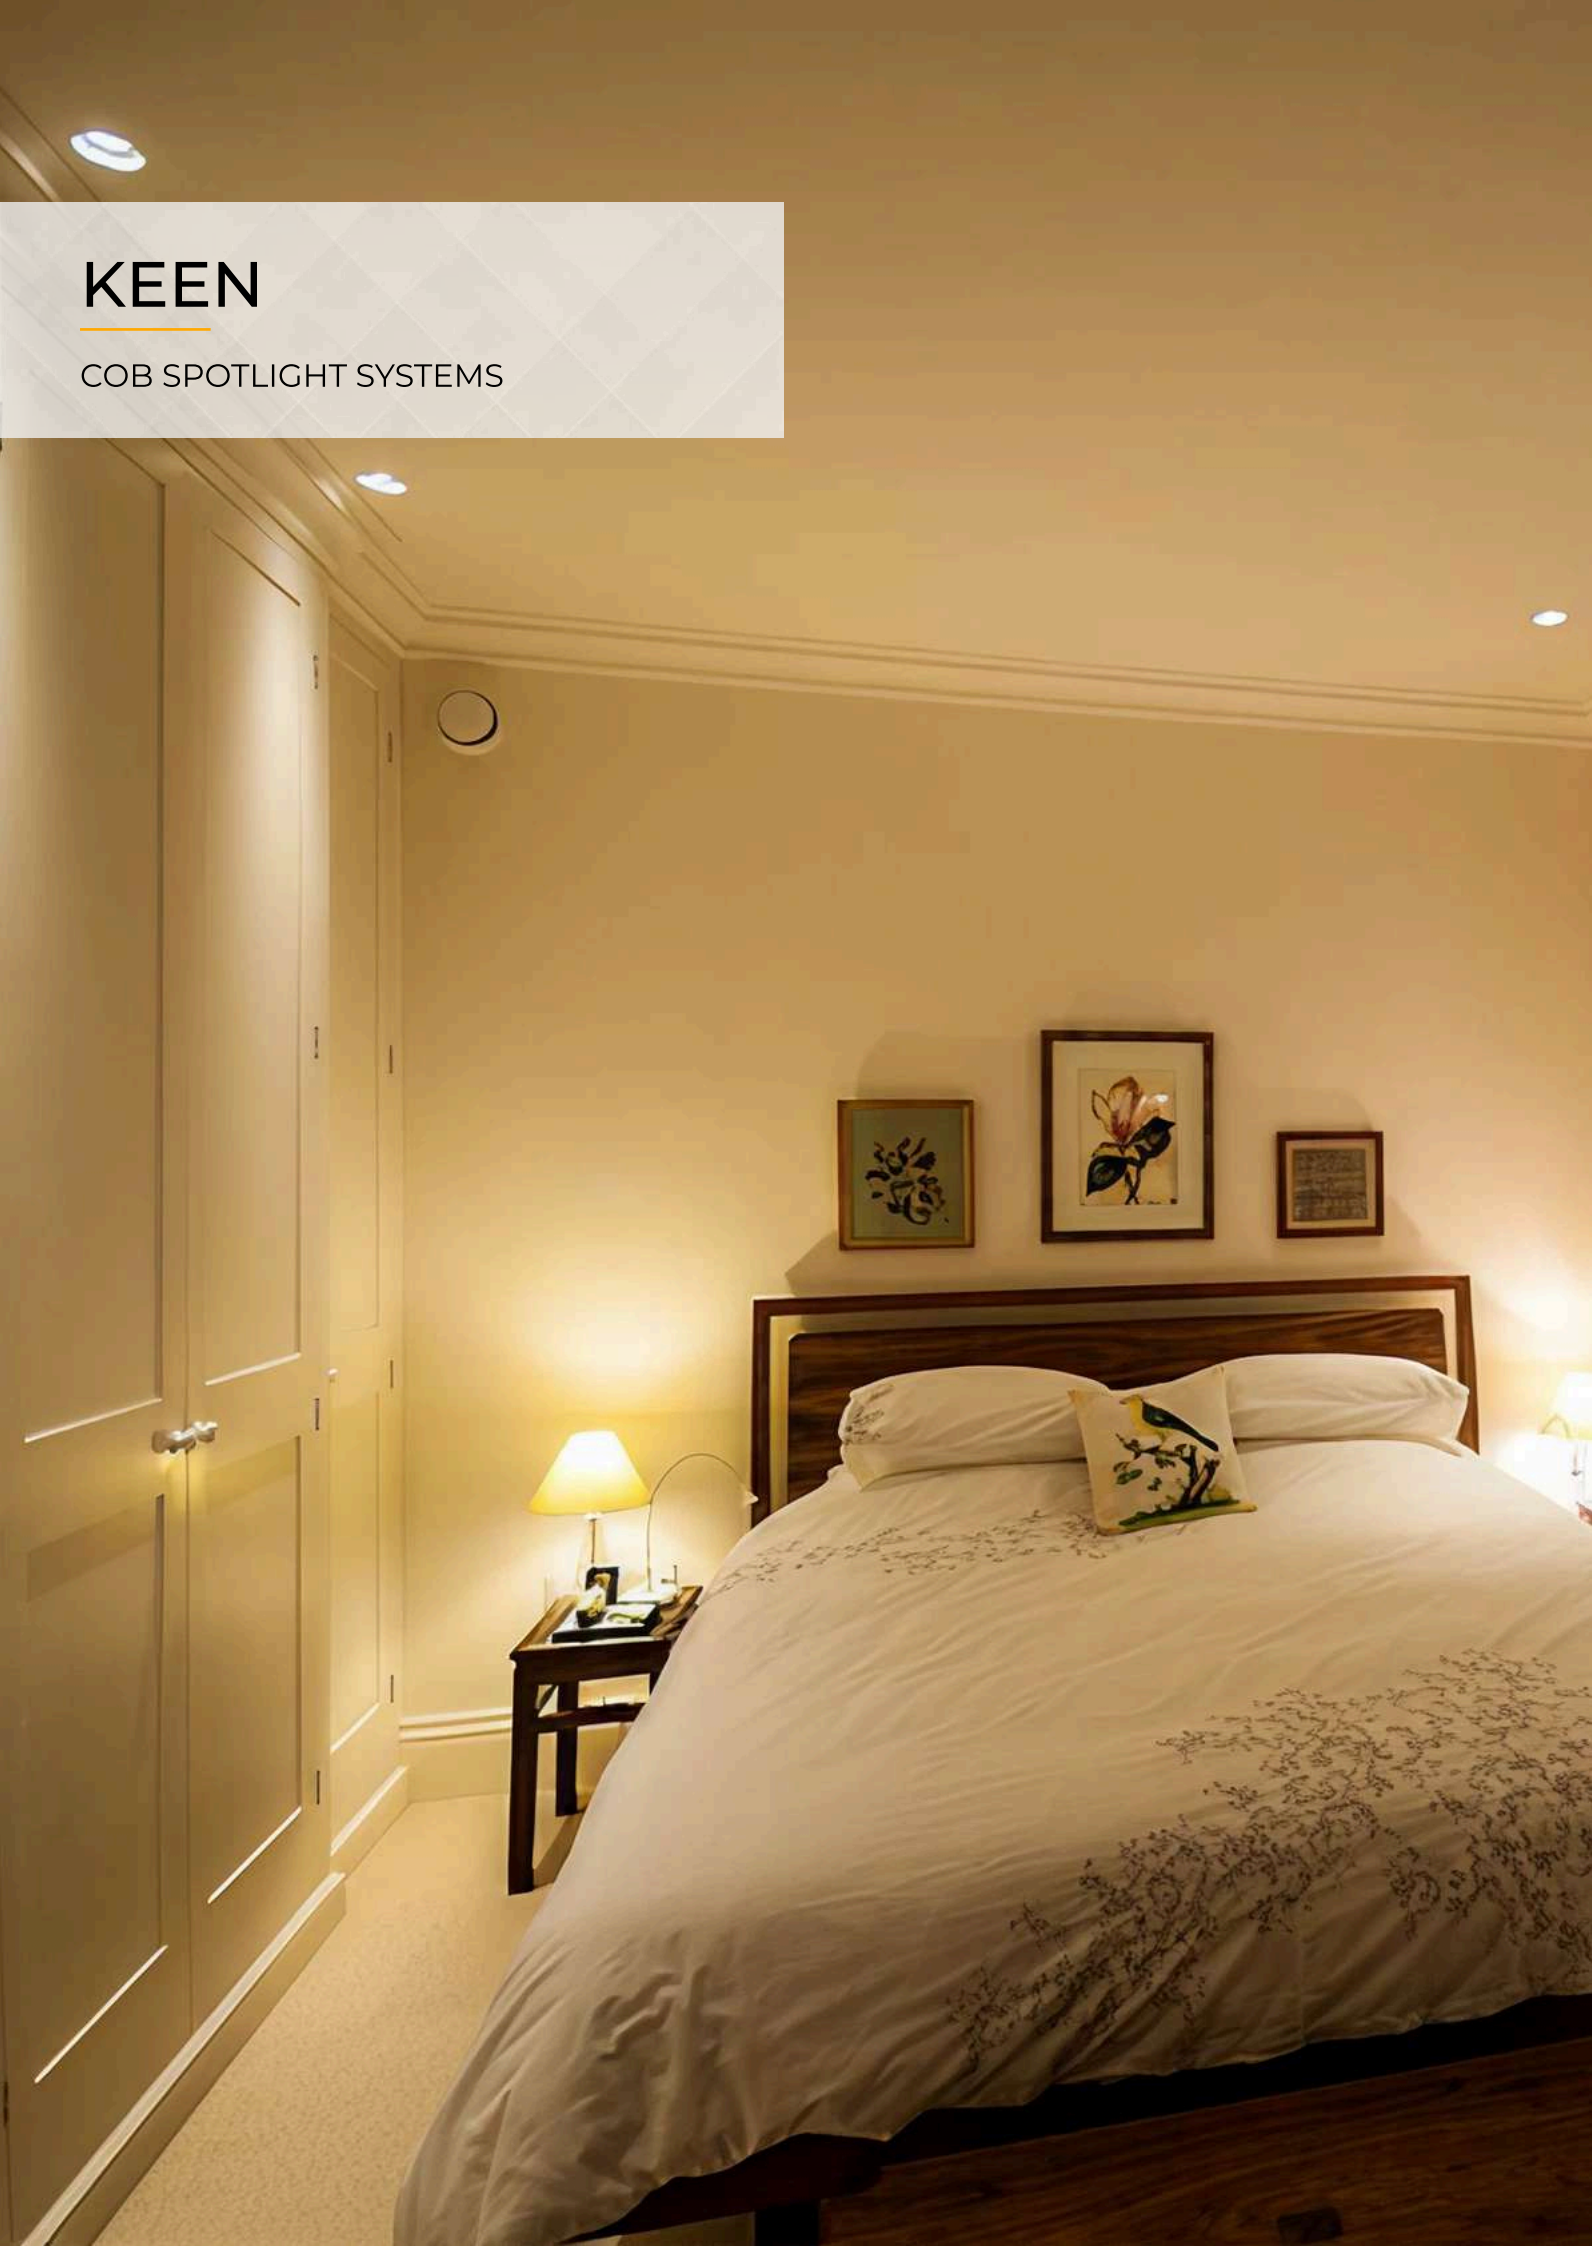

KEEN

COB SPOTLIGHT SYSTEMS



KEEN.1.7.MW.MW.25.62.30S

Outer Size(mm) : Dia 71x70(H)
Cut Out Size : Dia 62mm
Wattage : 7W



KEEN.1.12.MW.MW.38.75.30S

Outer Size(mm) : Dia 82x85(H)
Cut Out Size : Dia 75mm
Wattage : 12W




KEEN.1.15.MW.MW.38.75.30S

Outer Size(mm) : Dia 82x100(H)
Cut Out Size : Dia 75mm
Wattage : 15W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt White / Matt Black	BEAM ANGLE	25°, 38°
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Osram
		CCT	2700k, 3000k, 3500k, 4000k, 5000k, 5700k, 6500k, CCT Tunable

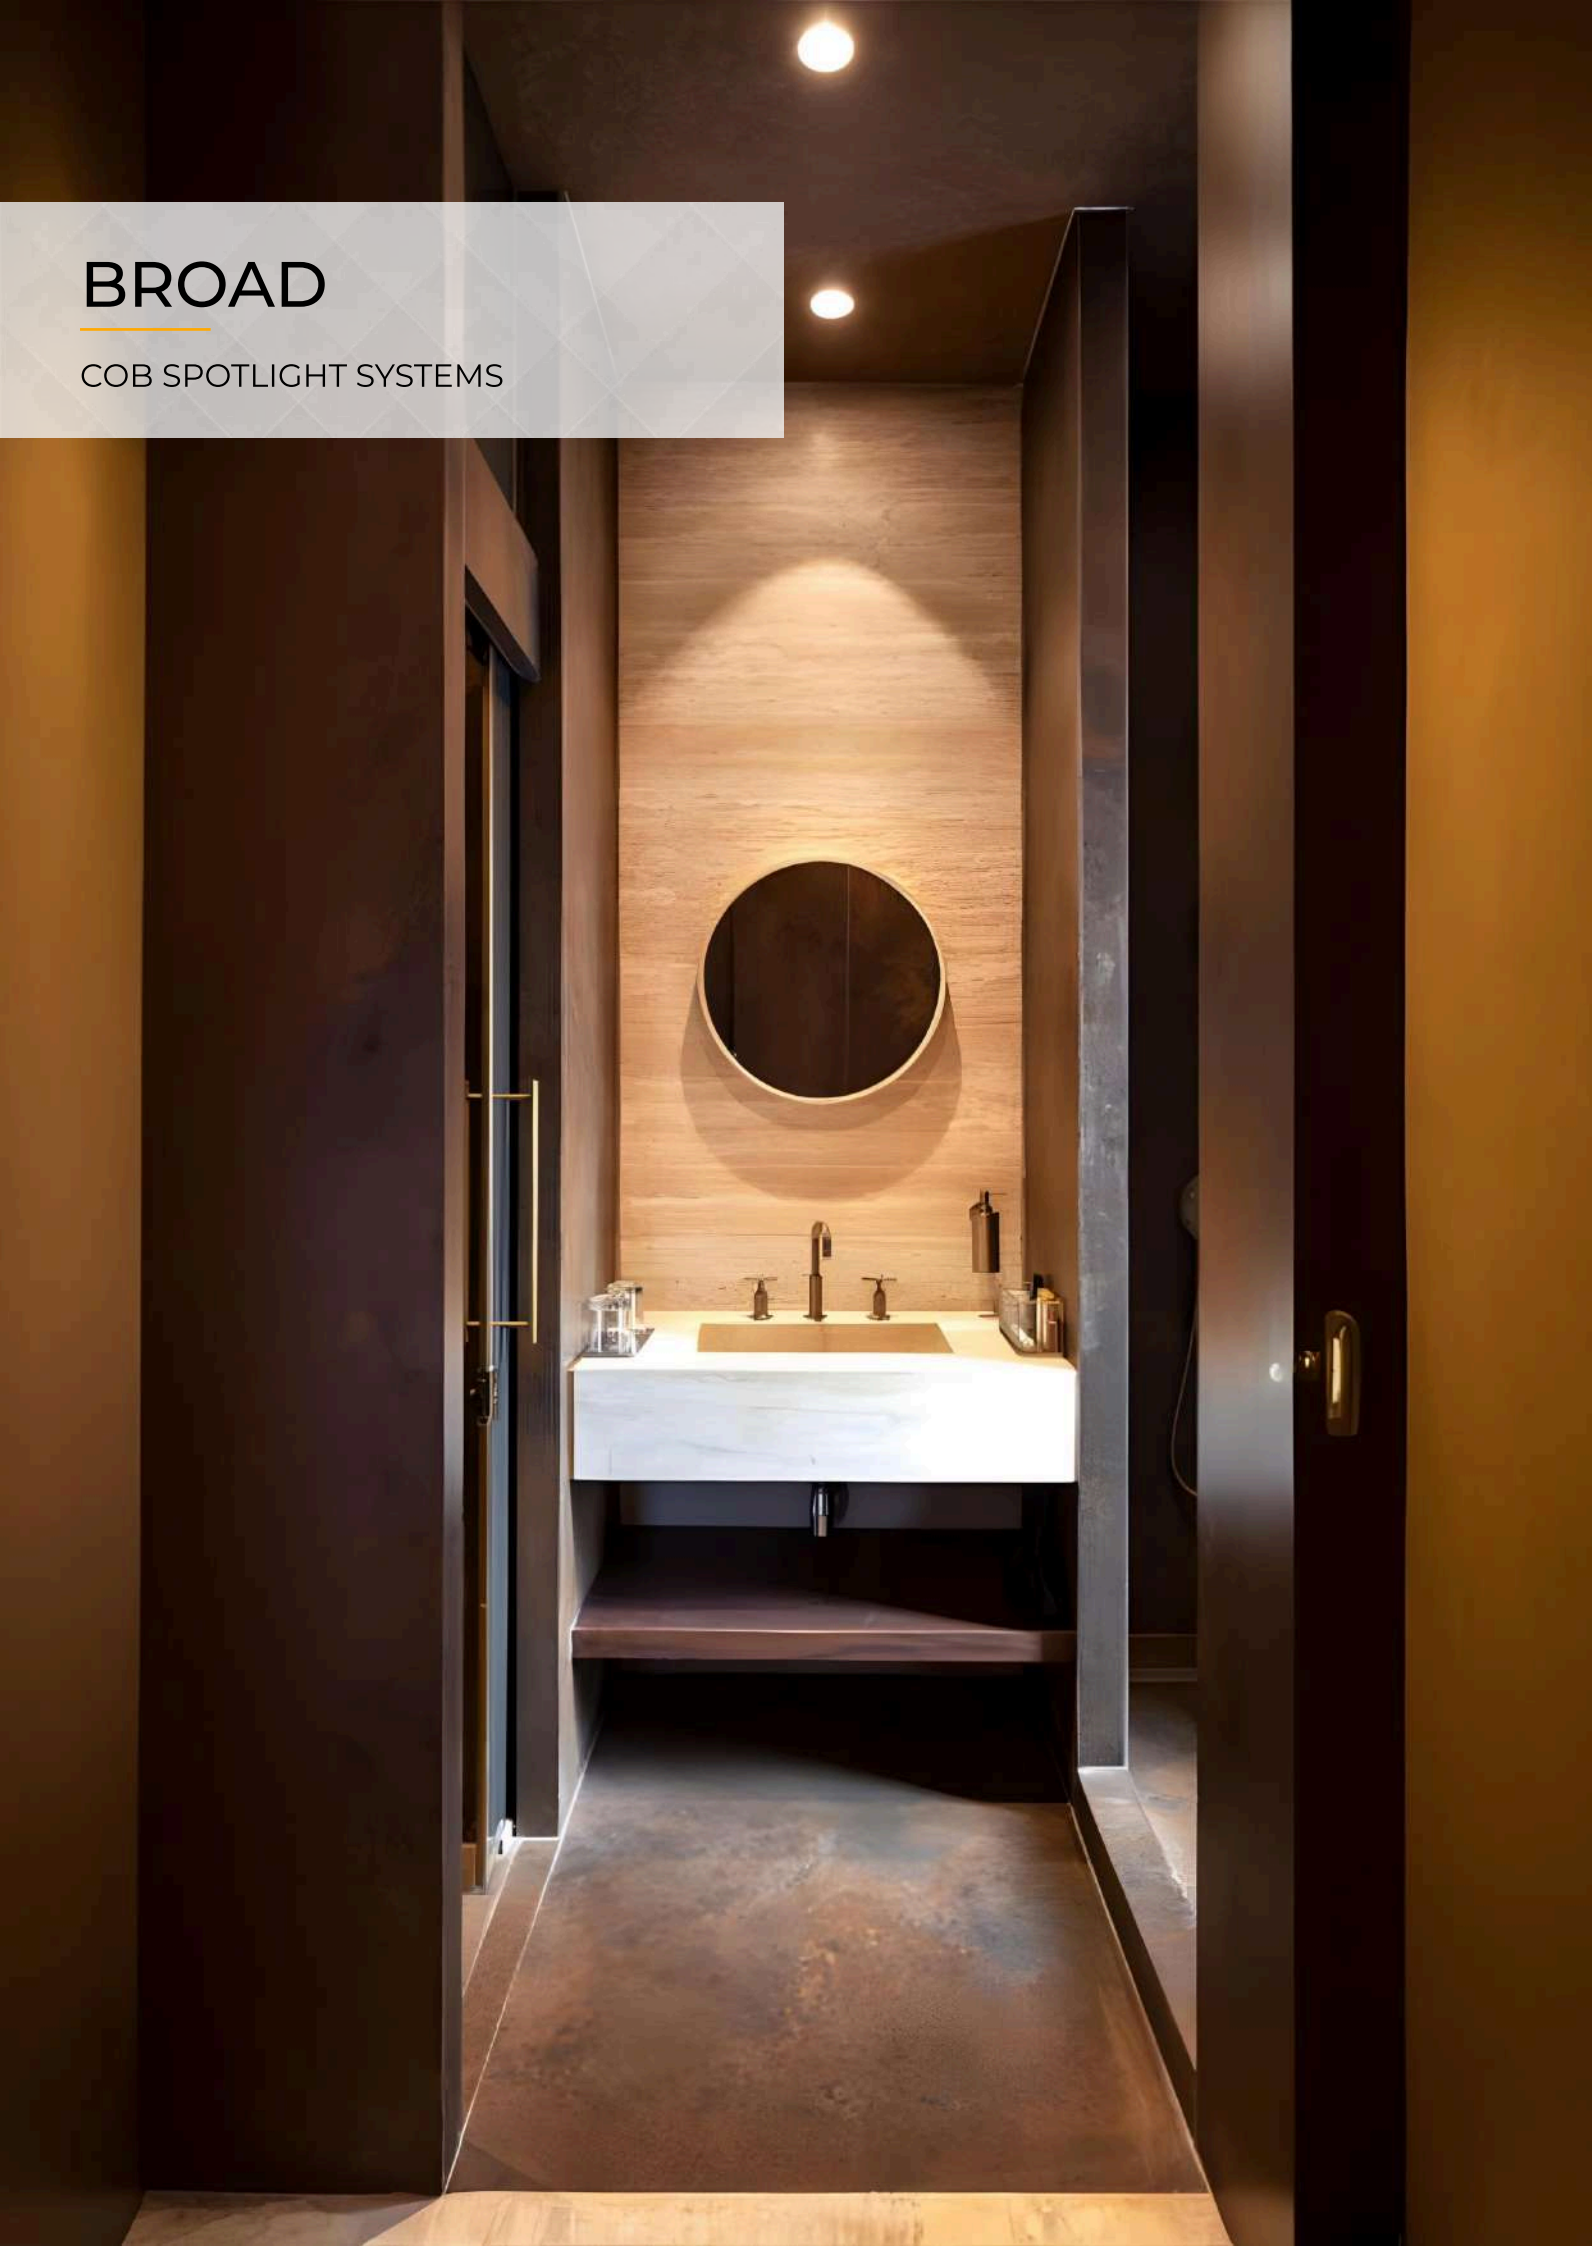

BROAD

COB SPOTLIGHT SYSTEMS



BROAD.1.7.MW.MW.25.60.30S

Outer Size(mm) : Dia 68x62(H)
Cut Out Size : Dia 60mm
Wattage : 7W



BROAD.1.12.MW.MW.38.75.30S

Outer Size(mm) : Dia 85x73(H)
Cut Out Size : Dia 75mm
Wattage : 12W



BROAD.1.15.MW.MW.38.75.30S

Outer Size(mm) : Dia 85x88(H)
Cut Out Size : Dia 75mm
Wattage : 15W



BROAD.1.18.MW.MW.38.81.30S

Outer Size(mm) : Dia 95x92(H)
Cut Out Size : Dia 81mm
Wattage : 18W




BROAD.1.24.MW.MW.45.110.40S

Outer Size(mm) : Dia 120x96(H)
Cut Out Size : Dia 110mm
Wattage : 24W


PRODUCT PROPERTIES

LED	Osram
INPUT VOLTAGE	220-240V ac
PRODUCT FINISH	Matt White / Matt Black
REFLECTOR FINISH	Matt White / Matt Black
IP RATING	IP 20
OPERATING TEMPERATURE	0-50°c
HOUSING MATERIAL	Aluminium Die Cast
CRI	>90
SWIVEL / FIXED	Fixed
BEAM ANGLE	25°, 38°, 45°
DIMMABLE	Triac / Analogue / Dali (on request)
DRIVER BRAND	Osram
CCT	2700k, 3000k, 3500k, 4000k, 5000k, 5700k, 6500k

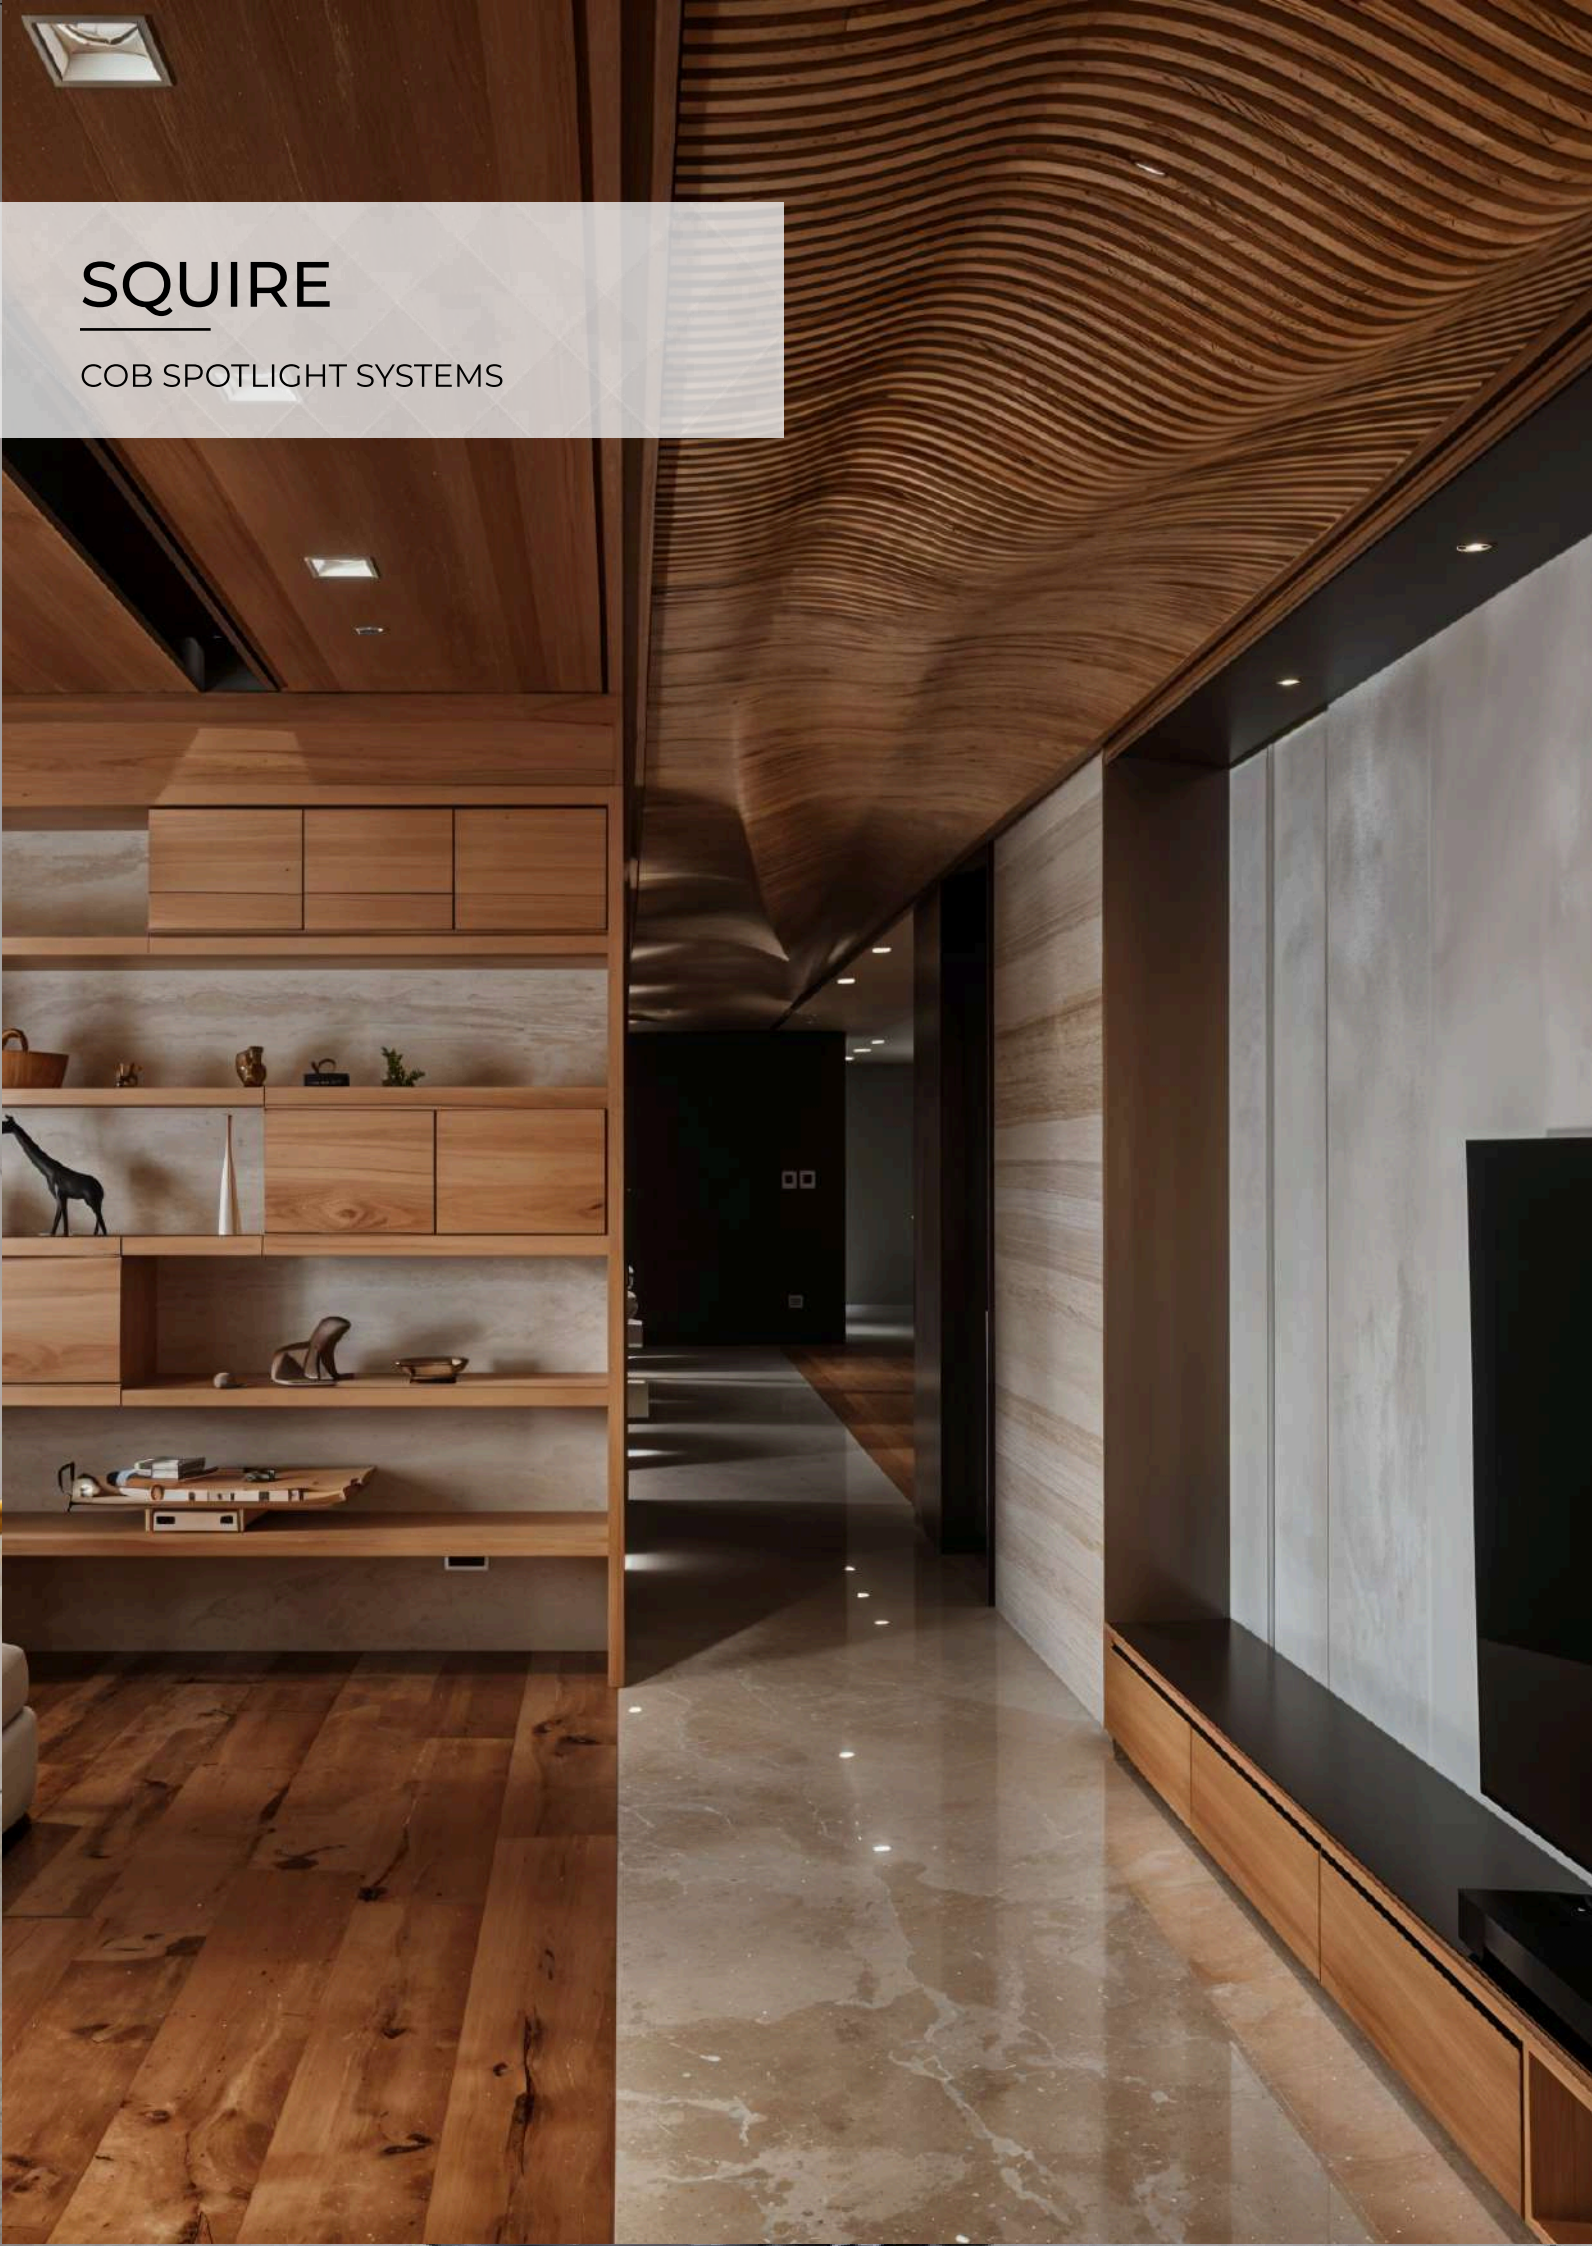


SQUIRE

COB SPOTLIGHT SYSTEMS

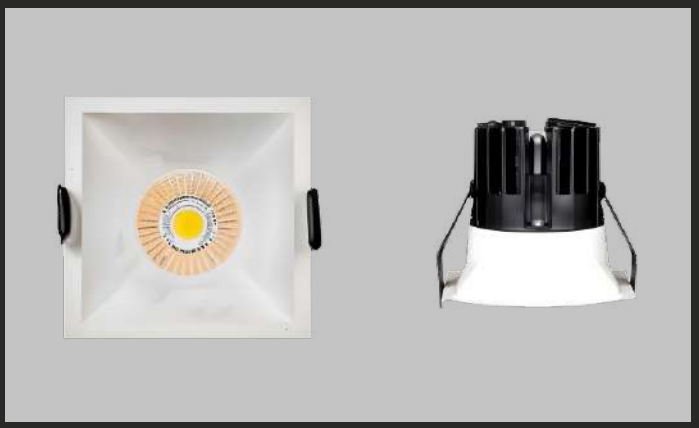


SQRE.1.7.SW.SW.25.6060.30S

Outer Size(mm) : 68(L)x68(W)x62(H)
Cut Out Size : 60x60mm
Wattage : 7W

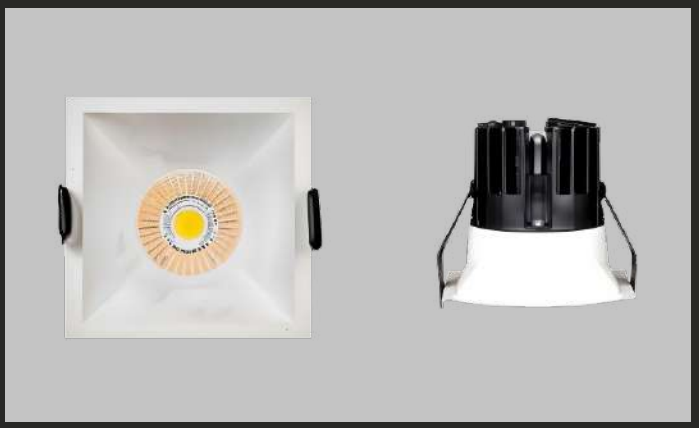

SQRE.1.12.SW.SW.38.7575.30S

Outer Size(mm) : 85(L)x85(W)x73(H)
Cut Out Size : 75x75mm
Wattage : 12W

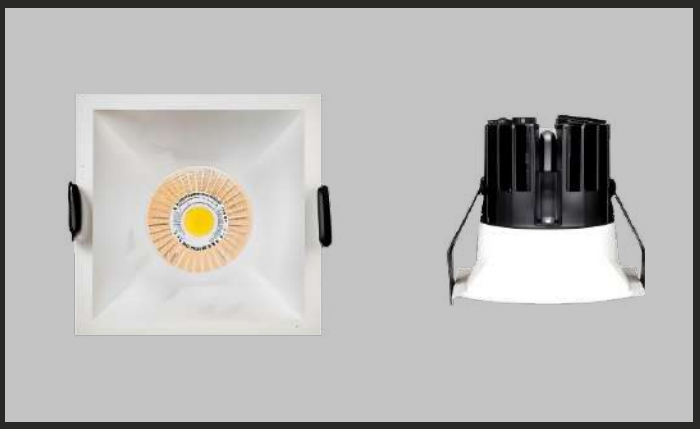

SQRE.1.15.SW.SW.38.7575.30S

Outer Size(mm) : 85(L)x85(W)x88(H)
Cut Out Size : 75x75mm
Wattage : 15W


PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt White / Matt Black	BEAM ANGLE	25°, 38°
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Osram
		CCT	2700K, 3000K, 3500K, 4000K, 5000K, 5700K, 6500K

VOGUE

COB SPOTLIGHT SYSTEMS



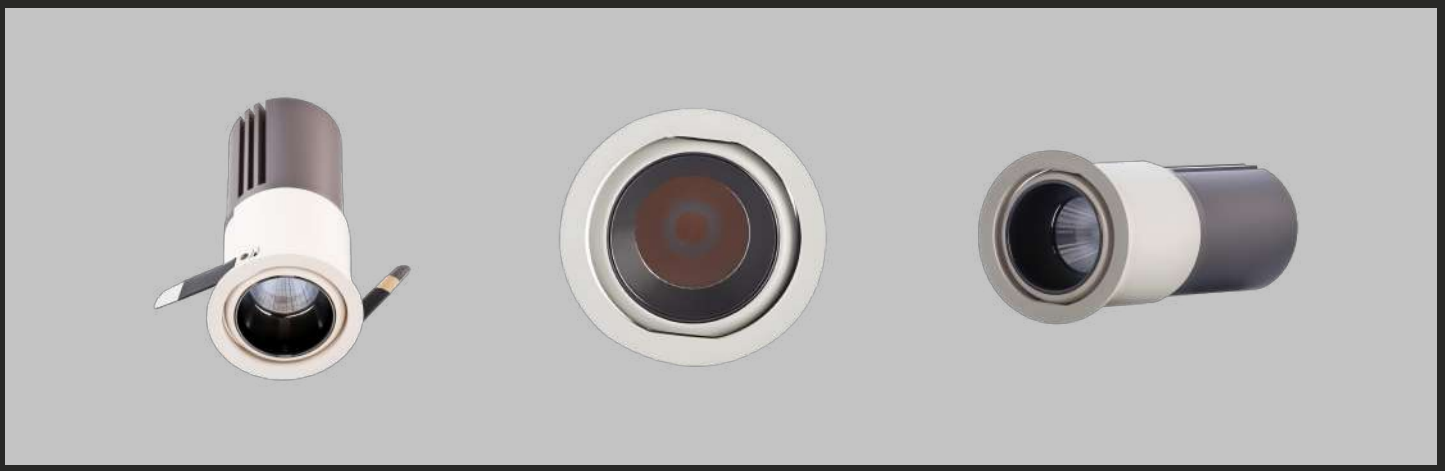


VOGUE.1.8.MW.NI.36.40.30G

Outer Size(mm) : Dia 44x90(H)
Cut Out Size : 40mm
Wattage : 8W


PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt Black / Matt White	SWIVEL ANGLE	Tiltable
REFLECTOR FINISH	Nickel	BEAM ANGLE	36°
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Osram
		CCT	3000k, 4000k

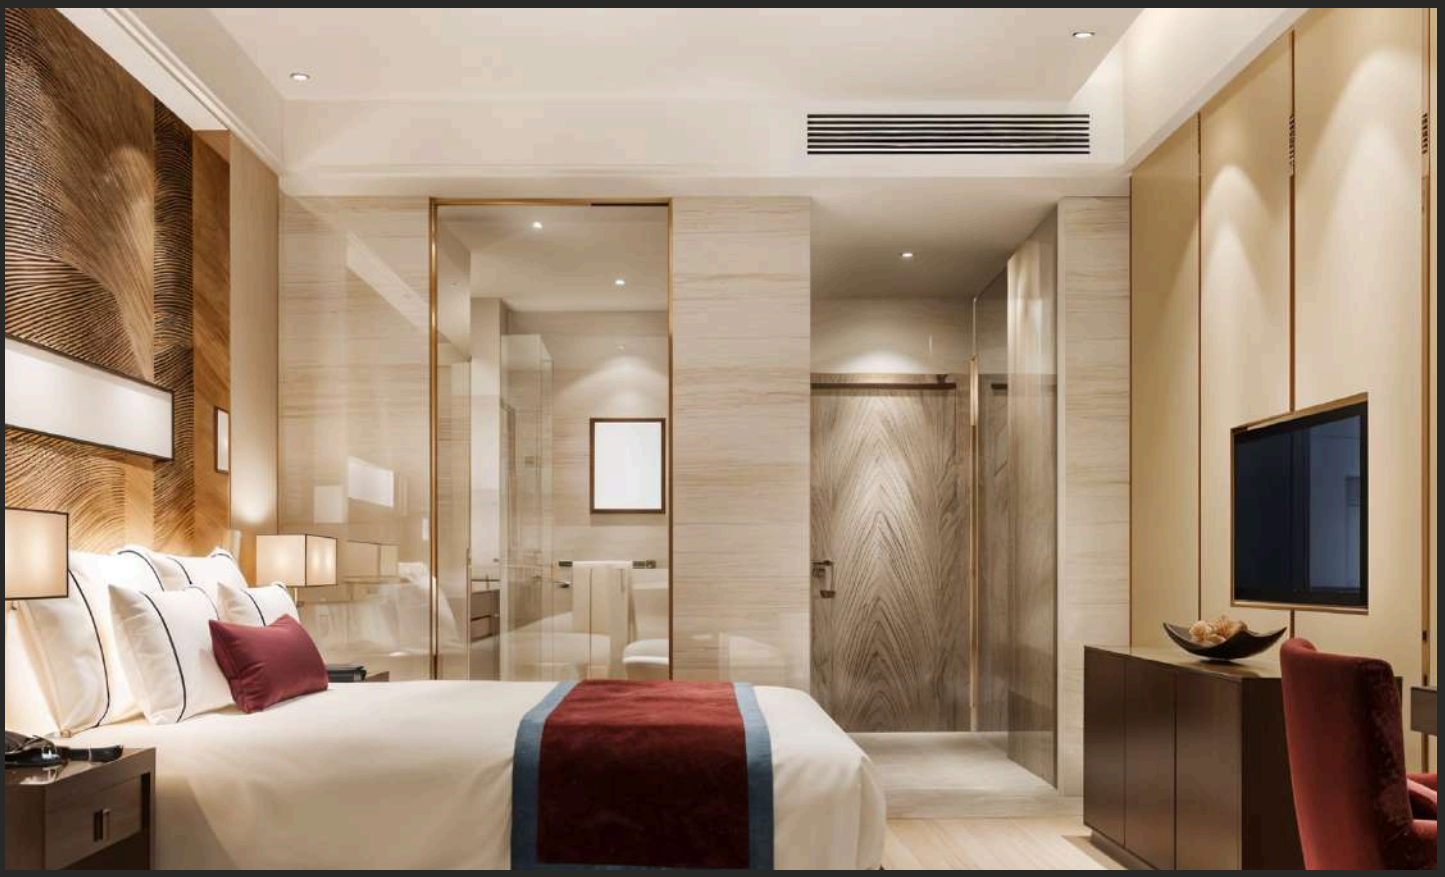



LACUNA TRIM

COB SPOTLIGHT SYSTEMS

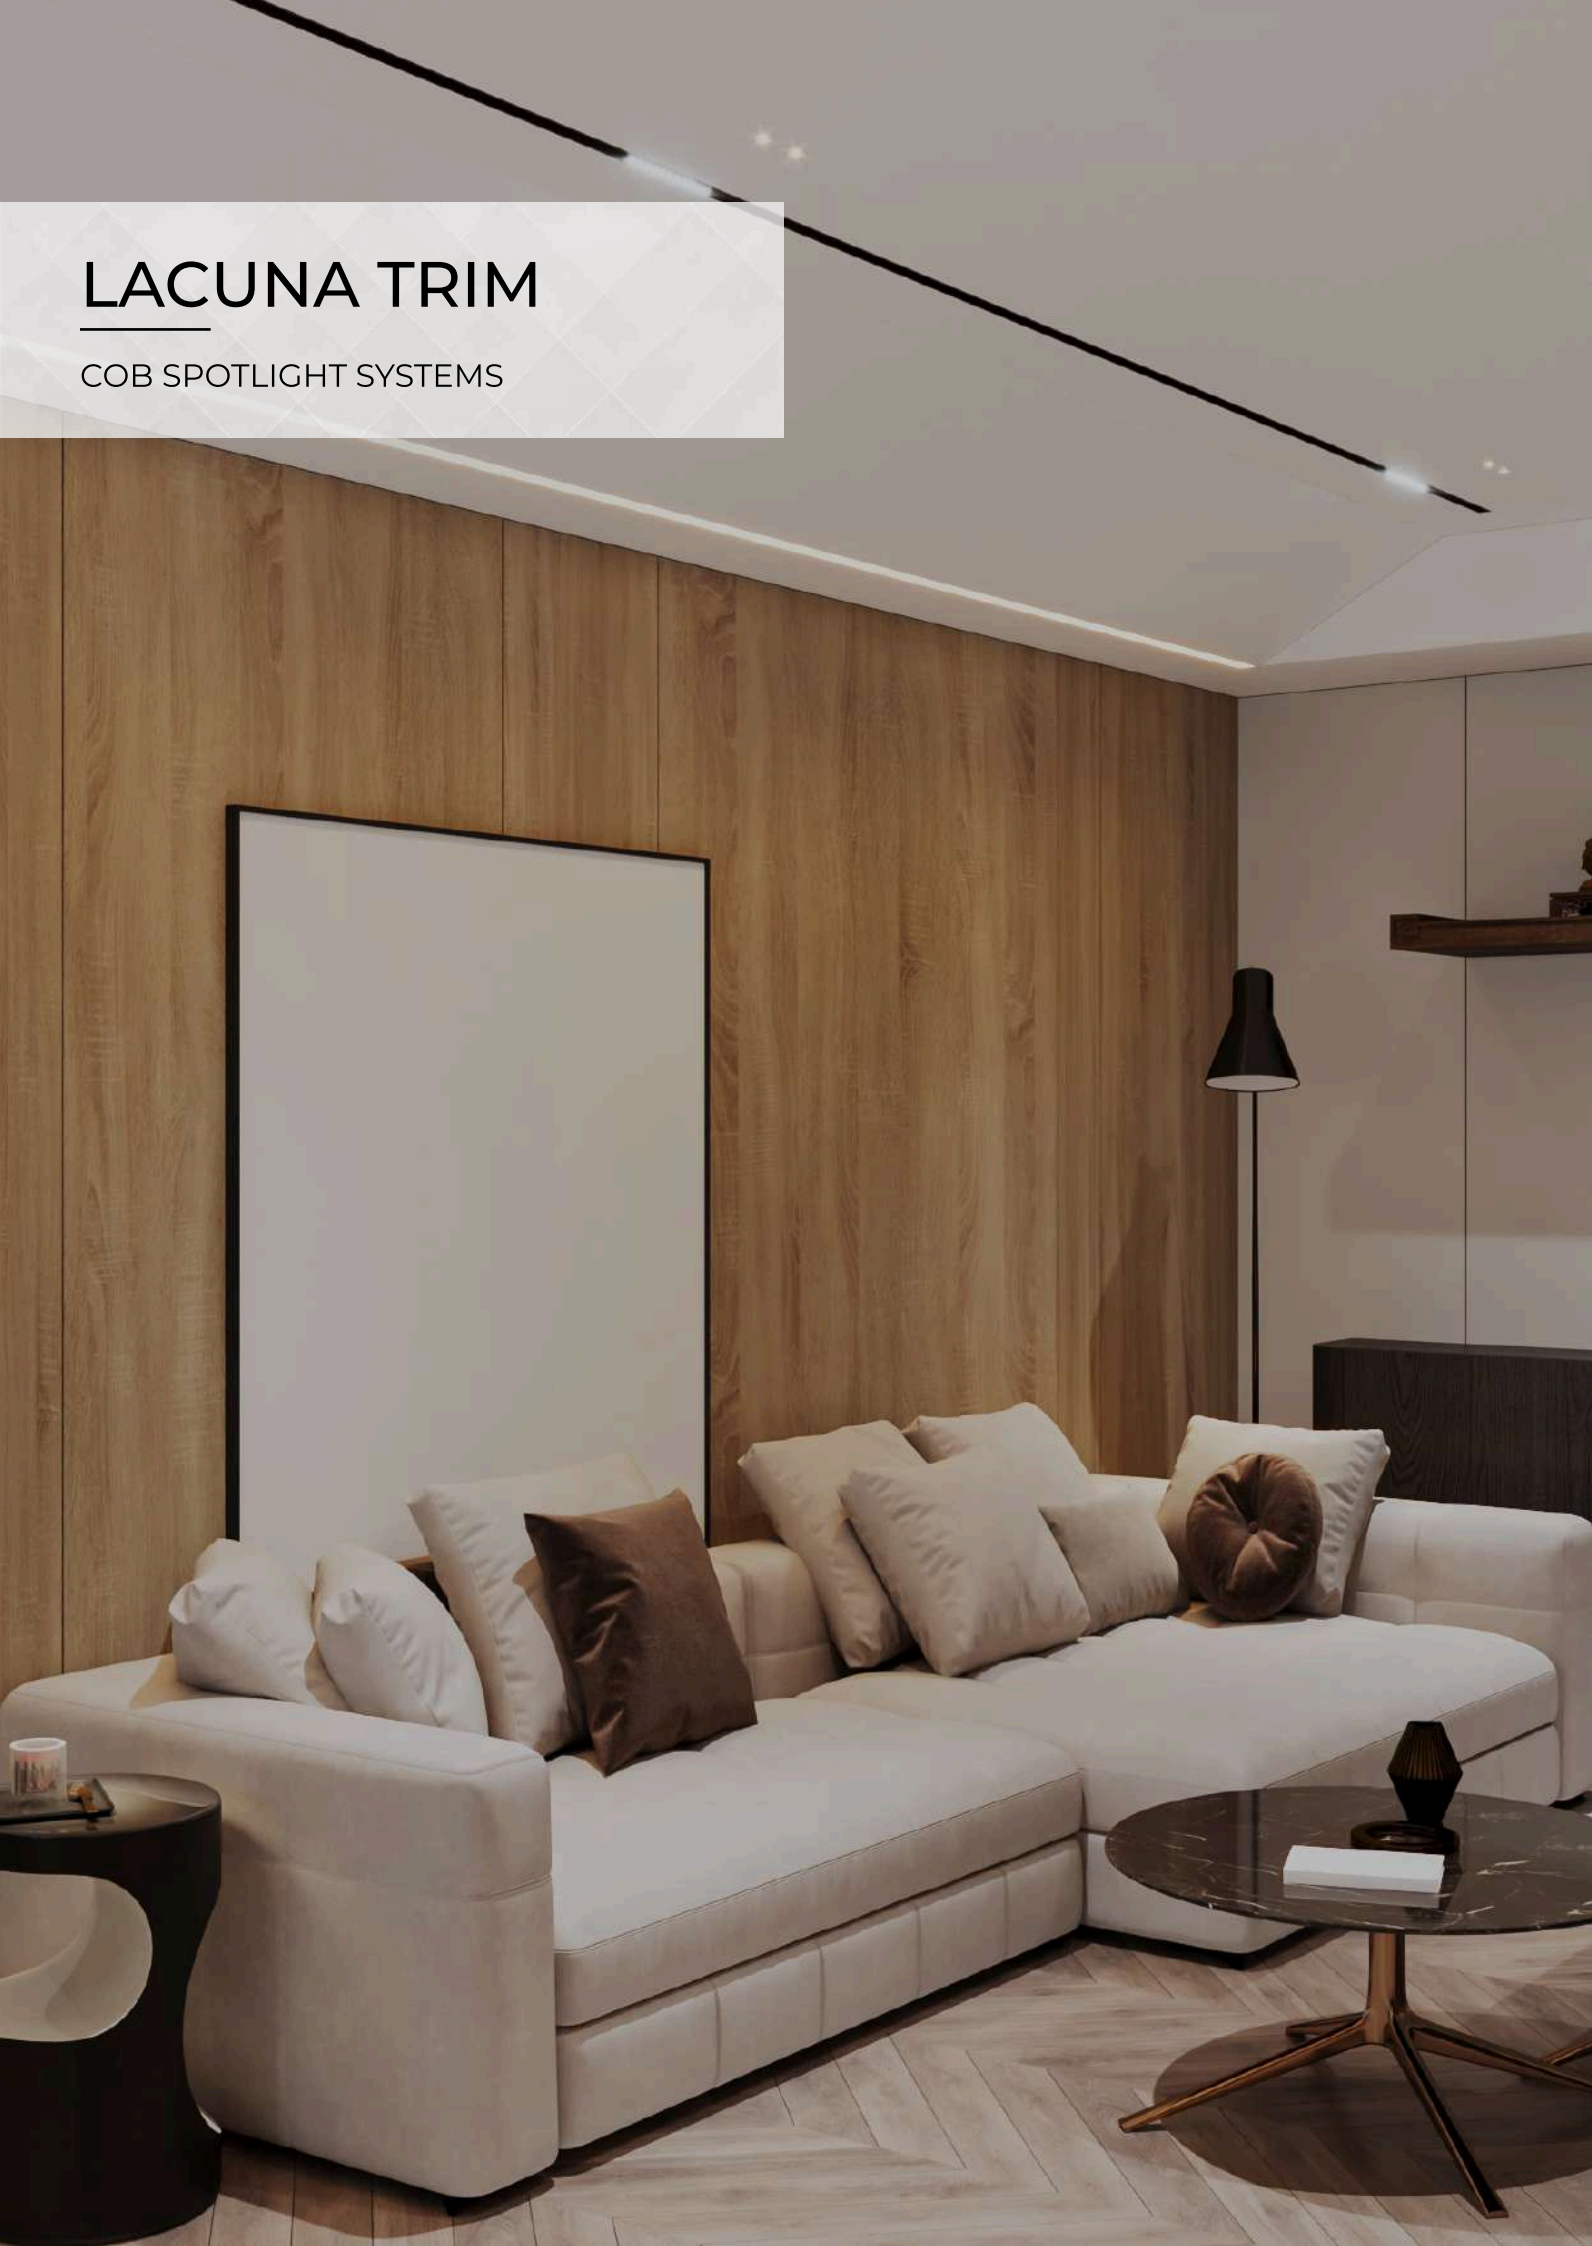







LACUNATRIM.1.8.MW.MB.24.45.30G

Outer Size(mm) : Dia 60x50(H)
Cut Out Size : Dia 45mm
Wattage : 8W


PRODUCT PROPERTIES


LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt White	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt Black	BEAM ANGLE	24°, 36°
IP RATING	IP 20	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac / Analogue / Dali (on request)
		CCT	3000k, 4000k





LACUNA TRIMLESS

COB SPOTLIGHT SYSTEMS

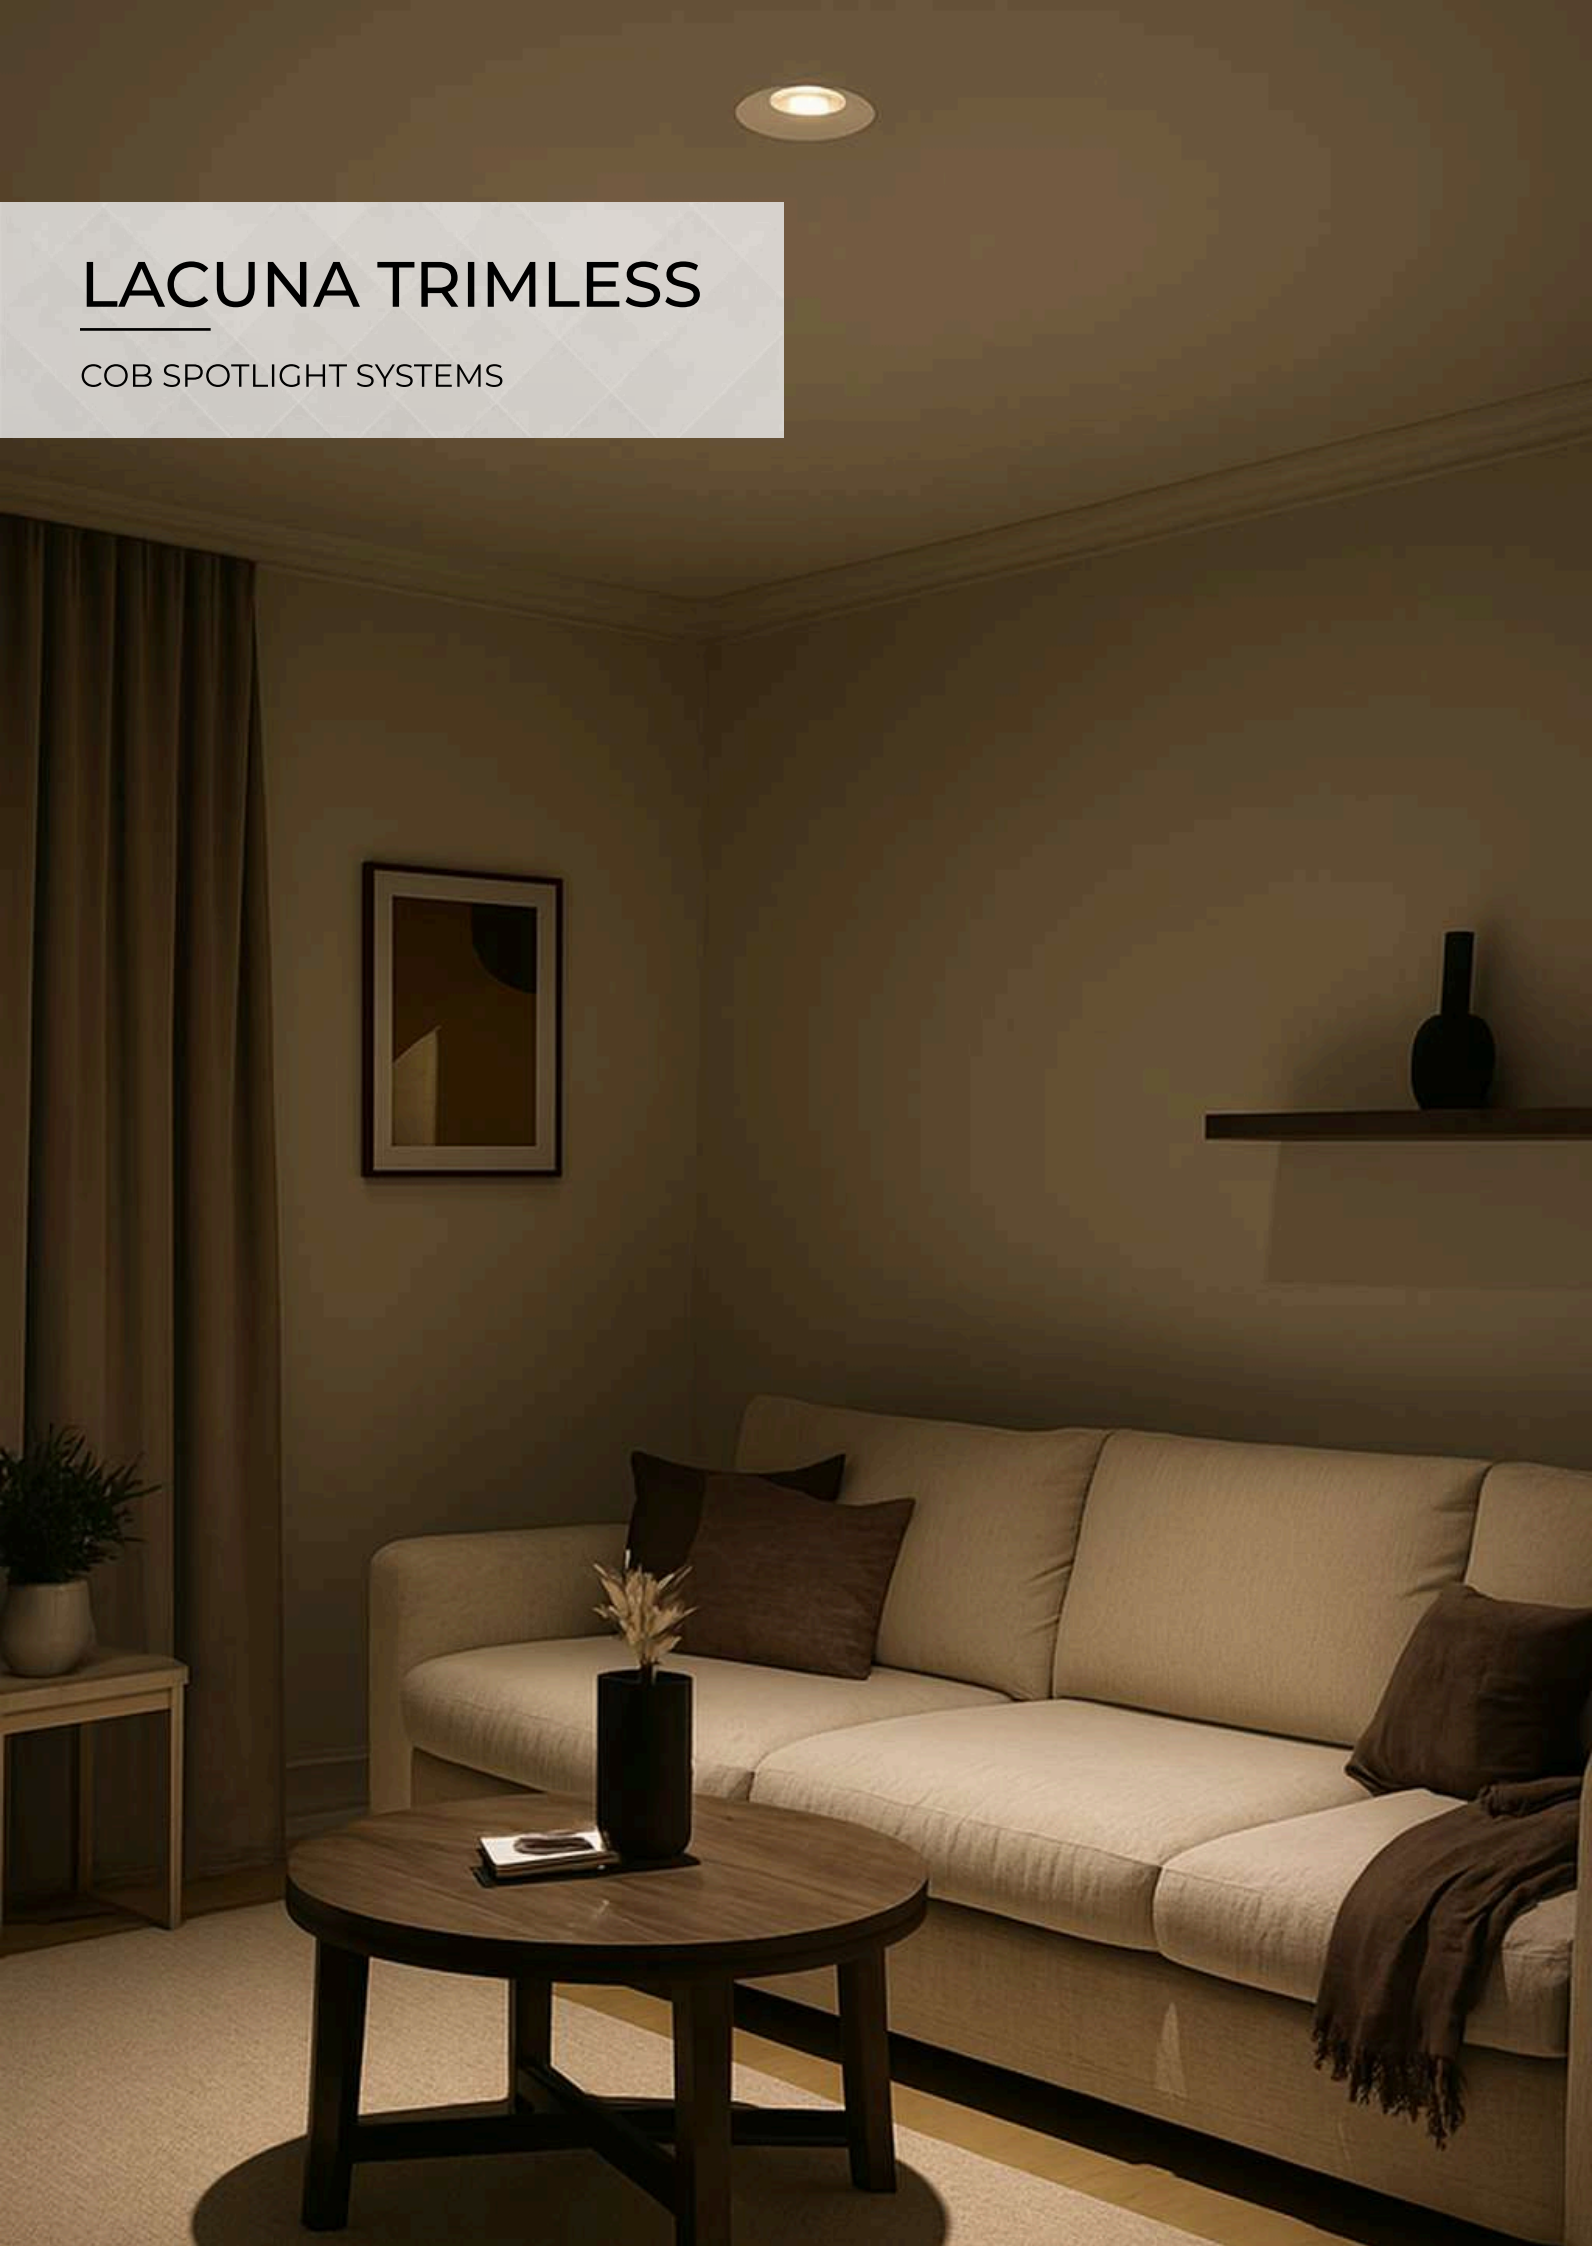








LACUNATRLS.1.8.MW.MB.24.45.30G

Outer Size(mm) : Dia 80x50(H)
Cut Out Size : Dia 45mm
Wattage : 8W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt White	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt Black	BEAM ANGLE	24°, 36°
IP RATING	IP 20	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac/Analogue/Dali (on request)
		CCT	3000k, 4000k

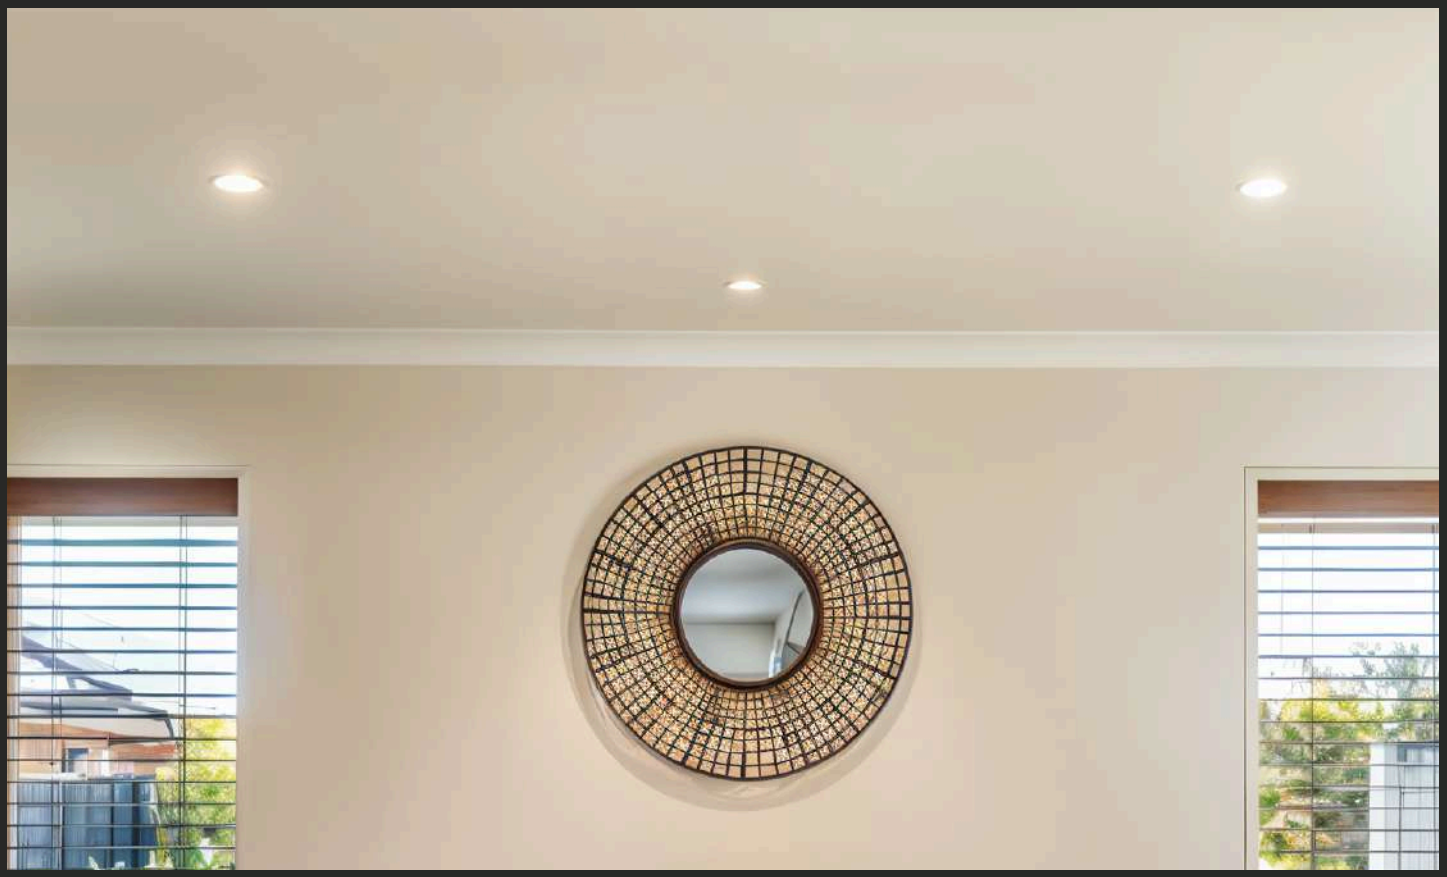



GUSH

COB SPOTLIGHT SYSTEMS




GUSH.1.10.MW.MW.36.52.30G

Outer Size(mm) : 60(L)x78(H)
Cut Out Size : 52mm
Wattage : 10W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	240V / 50Hz	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL ANGLE	Tiltable
REFLECTOR FINISH	Matt White / Matt Black	BEAM ANGLE	36°
IP RATING	IP 44 (Moisture Proof)	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac / Analogue / Dali (on Request)
		CCT	3000k, 4000k, 6500k

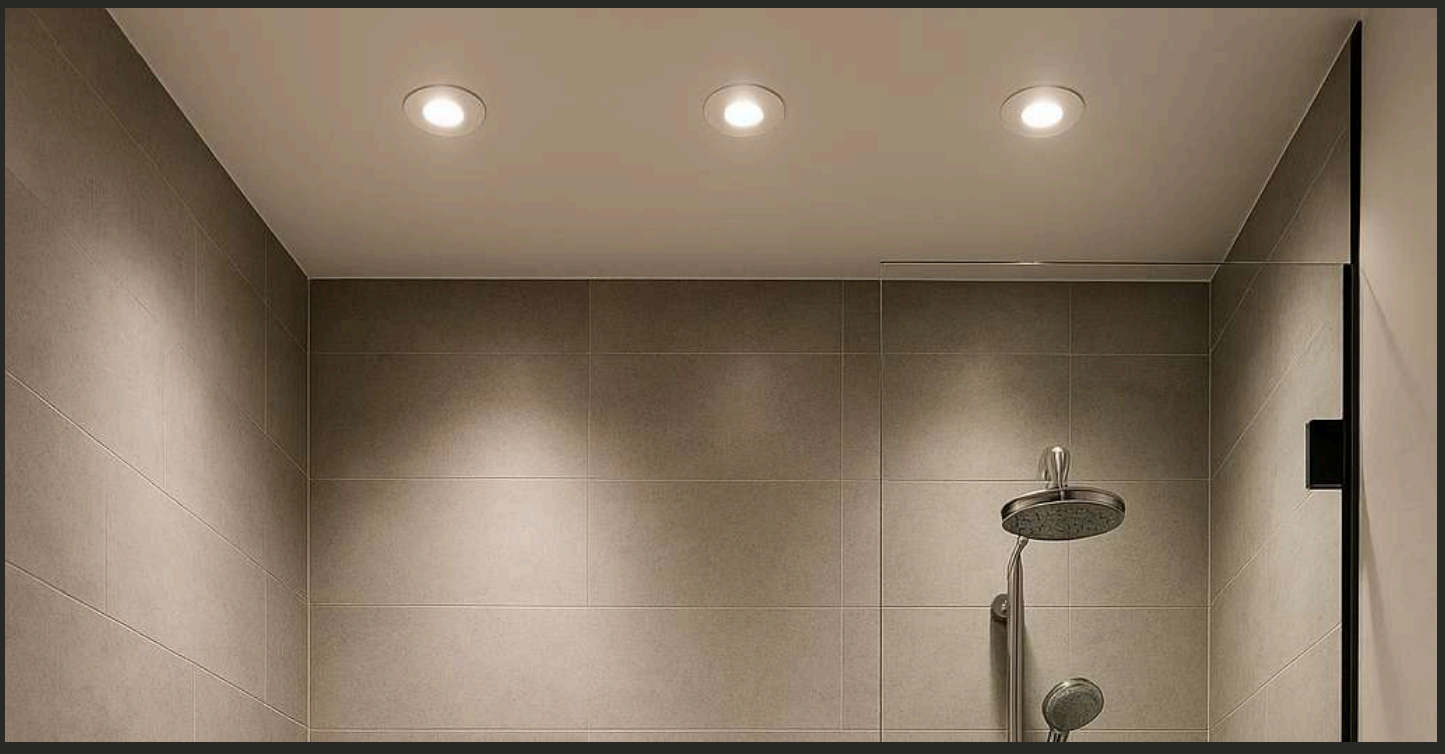


BRINK

COB SPOTLIGHT SYSTEMS





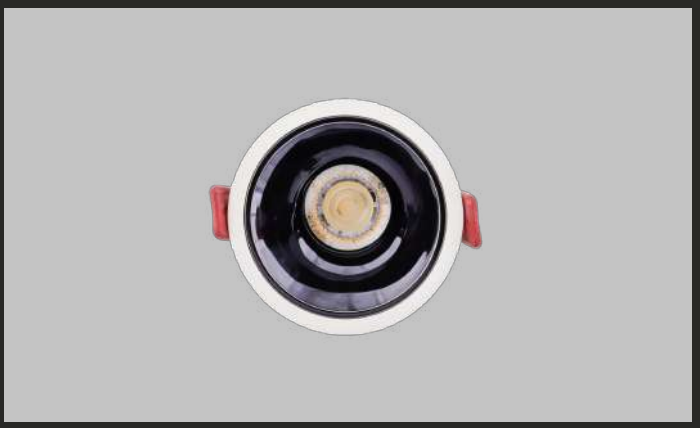

BRINK.1.7.MW.NI.36.51.30G

Outer Size(mm) : Dia 61x45(H)
Cut Out Size : Dia 51mm
Wattage : 7W


BRINK.1.12.MW.NI.36.72.30G

Outer Size(mm) : Dia 81x50(H)
Cut Out Size : Dia 72mm
Wattage : 12W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	240V / 50Hz	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL ANGLE	Tiltable
REFLECTOR FINISH	Nickel	BEAM ANGLE	36°
IP RATING	IP 20	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac / Analogue / Dali (on Request)
		CCT	3000k, 4000k, 6500k



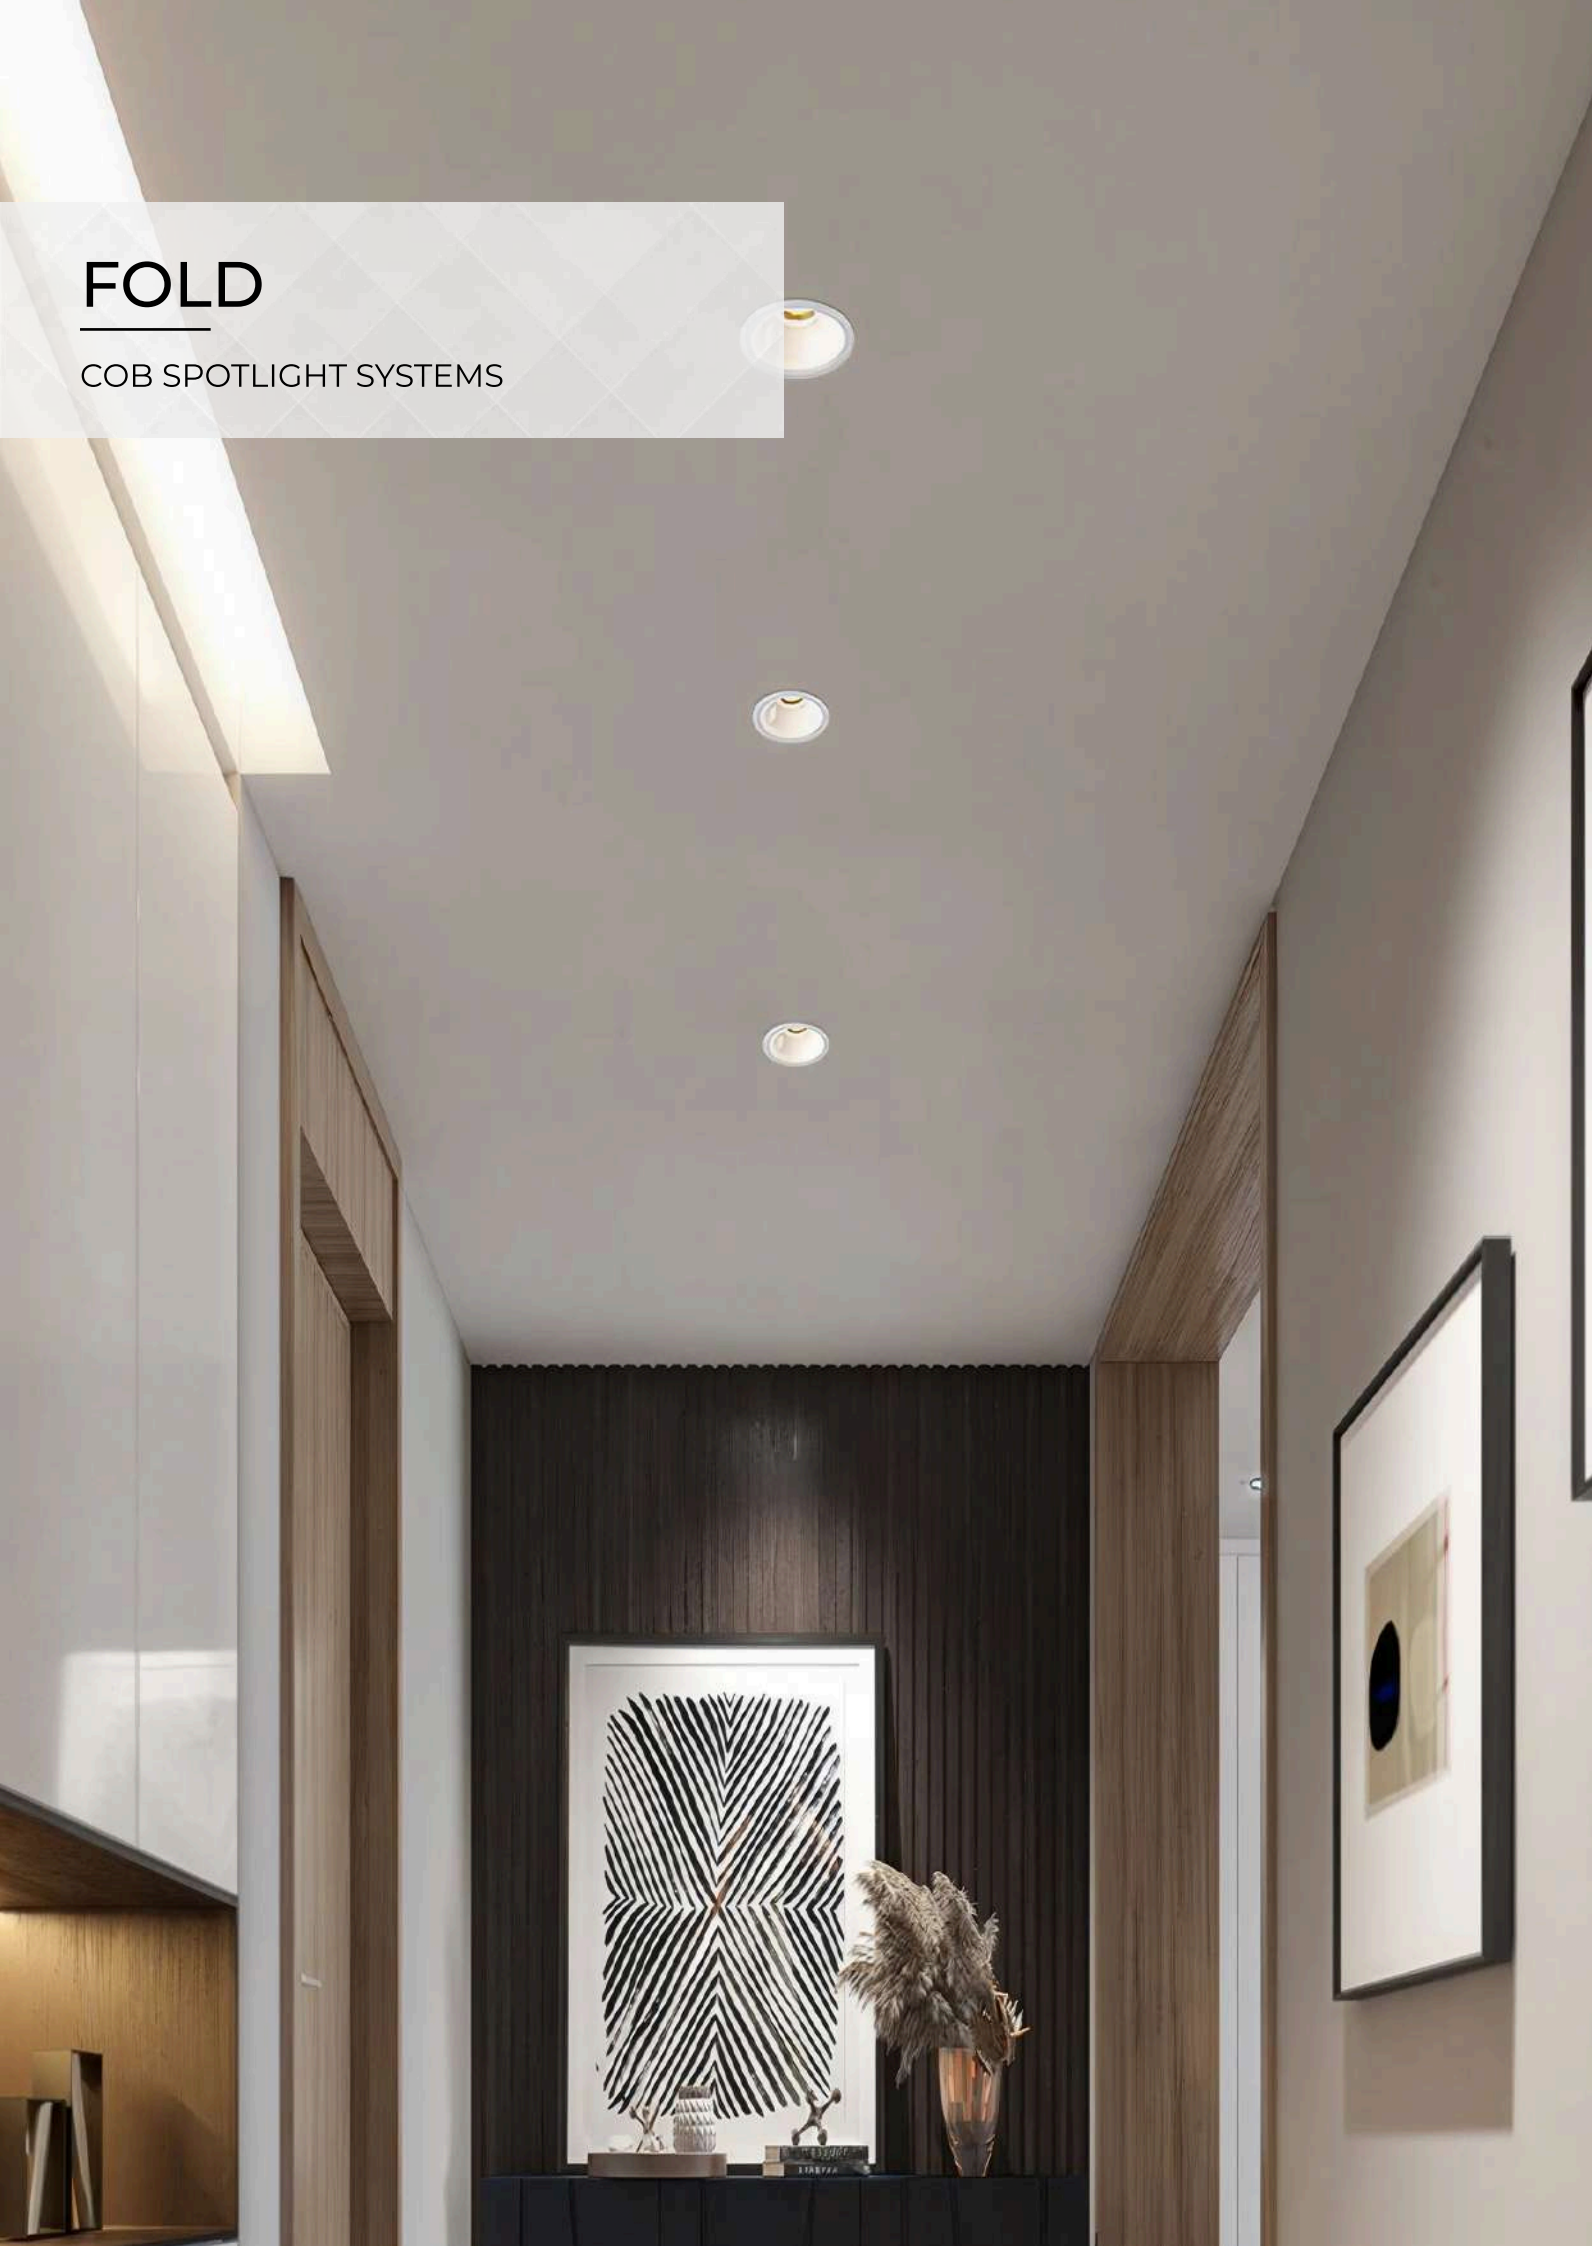

FOLD

COB SPOTLIGHT SYSTEMS





FOLD.1.7.MW.MW.36.54.30G

Outer Size(mm) : Dia 63x77(H)
Cut Out Size : Dia 54mm
Wattage : 7W

FOLD.1.12.MW.MW.36.73.30G

Outer Size(mm) : Dia 85x85(H)
Cut Out Size : Dia 73mm
Wattage : 12W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	240V / 50Hz	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL ANGLE	Tiltable
REFLECTOR	Matt White / Matt Black/Nickel	BEAM ANGLE	36°
IP RATING	IP 20	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac / Analogue / Dali / CCT Tunable
		CCT	3000k, 4000k, 6500k





ACTIVE

COB SPOTLIGHT SYSTEMS




ACTIVE.1.7.MW.MW.36.85.30G

Outer Size(mm) : 95(L)x80(H)
Cut Out Size : 85mm
Wattage : 7W

PRODUCT PROPERTIES

LED	Osram
INPUT VOLTAGE	240V / 50Hz
PRODUCT FINISH	Matt White / Matt Black
REFLECTOR FINISH	Matt White/Matt Black/Gold
IP RATING	IP 20
OPERATING TEMPERATURE	0-50°c
HOUSING MATERIAL	Aluminium Die Cast
CRI	>90
SWIVEL ANGLE	Tiltable
BEAM ANGLE	36°
DRIVER BRAND	Osram
DIMMABLE	Triac / Analogue / Dali (on Request)
CCT	3000k, 4000k, 6500k

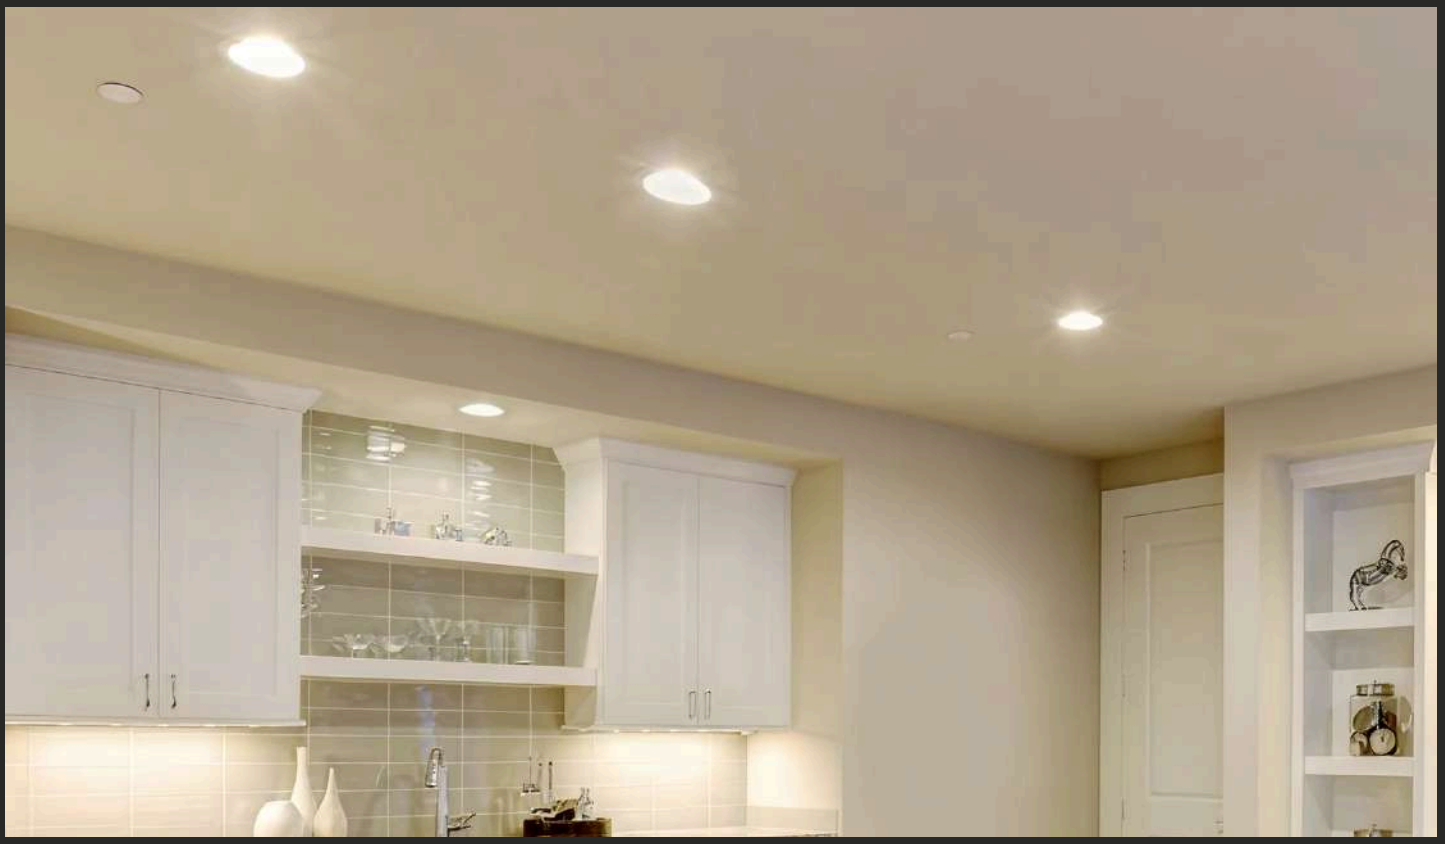

PIN POINT

COB SPOTLIGHT SYSTEMS







PINT100.1.3.MB.MB.36.55.30S

Outer Size(mm) : Dia 68x15(H)
Cylinder Size : Dia 25x112mm(L)
Cut Out Size : 55mm
Wattage : 3W

PINT200.1.3.MB.MB.36.55.30S


Outer Size(mm) : Dia 68x15(H)
Cylinder Size : Dia 25x197mm(L)
Cut Out Size : 55mm
Wattage : 3W

PINT300.1.3.MB.MB.36.55.30S

Outer Size(mm) : Dia 68x15(H)
Cylinder Size : Dia 25x304mm(L)
Cut Out Size : 55mm
Wattage : 3W

PRODUCT PROPERTIES

LED	Cree	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt Black / Matt White	SWIVEL / FIXED	Tilt
REFLECTOR FINISH	Matt Black / Matt White	BEAM ANGLE	36°
IP RATING	IP 20	DIMMABLE	NA
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Philips / Osram
		LIGHT COLOUR	3000k, 4000k

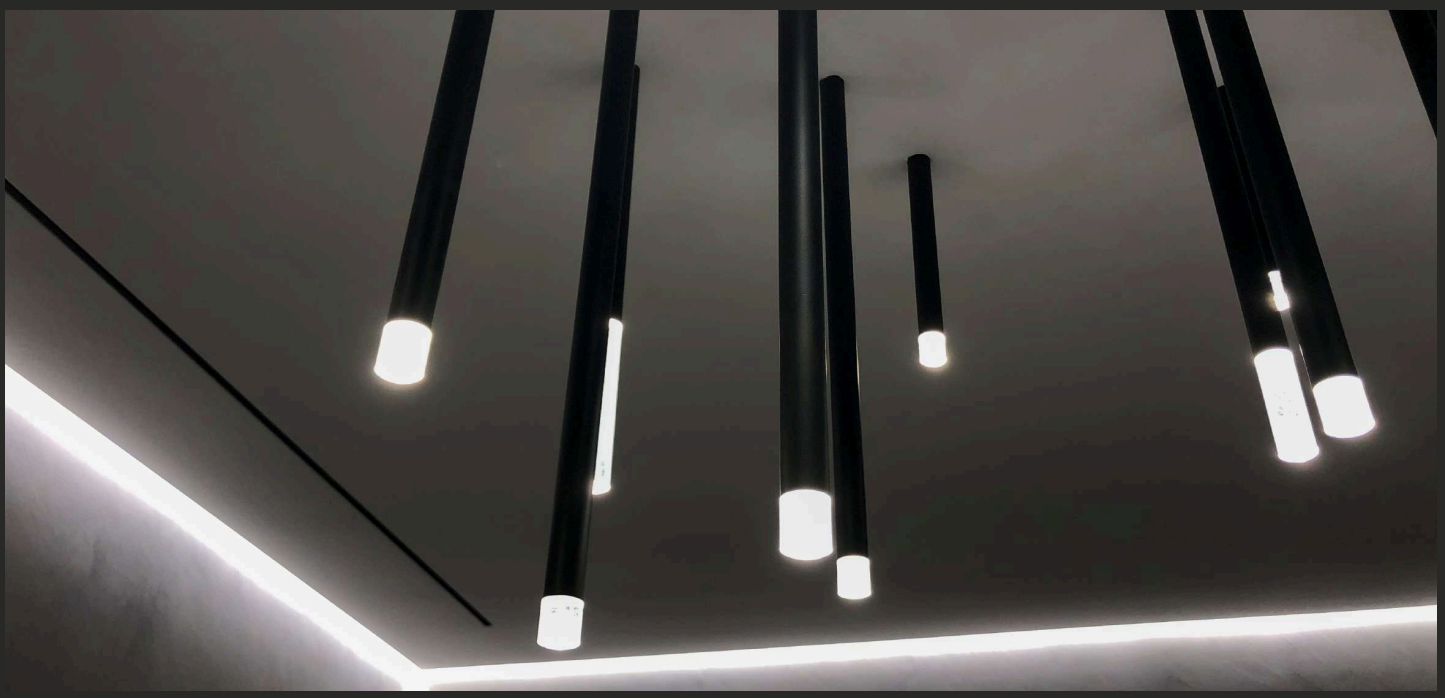



ACCENT SPOT

COB SPOTLIGHT SYSTEMS





ACCENTSPOT.1.15.MW.MB.36.110.30G

Outer Size(mm) : Dia 125x80(H)
Cut Out Size : Dia 110mm
Wattage : 15W

ACCENTSPOT.1.20.MW.MB.36.132.30G


Outer Size(mm) : Dia 148x43(H)
Cut Out Size : Dia 132mm
Wattage : 20W

ACCENTSPOT.1.30.MW.MB.36.154.30G

Outer Size(mm) : Dia 171x82(H)
Cut Out Size : Dia 154mm
Wattage : 30W

PRODUCT PROPERTIES

LED	Cree	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	240V / 50Hz	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL ANGLE	Tiltable
REFLECTOR FINISH	Matt White / Matt Black	BEAM ANGLE	36°, 60°
IP RATING	IP-20	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac/Analogue/Dali (on request)
		CCT	3000k, 4000k, 6500k

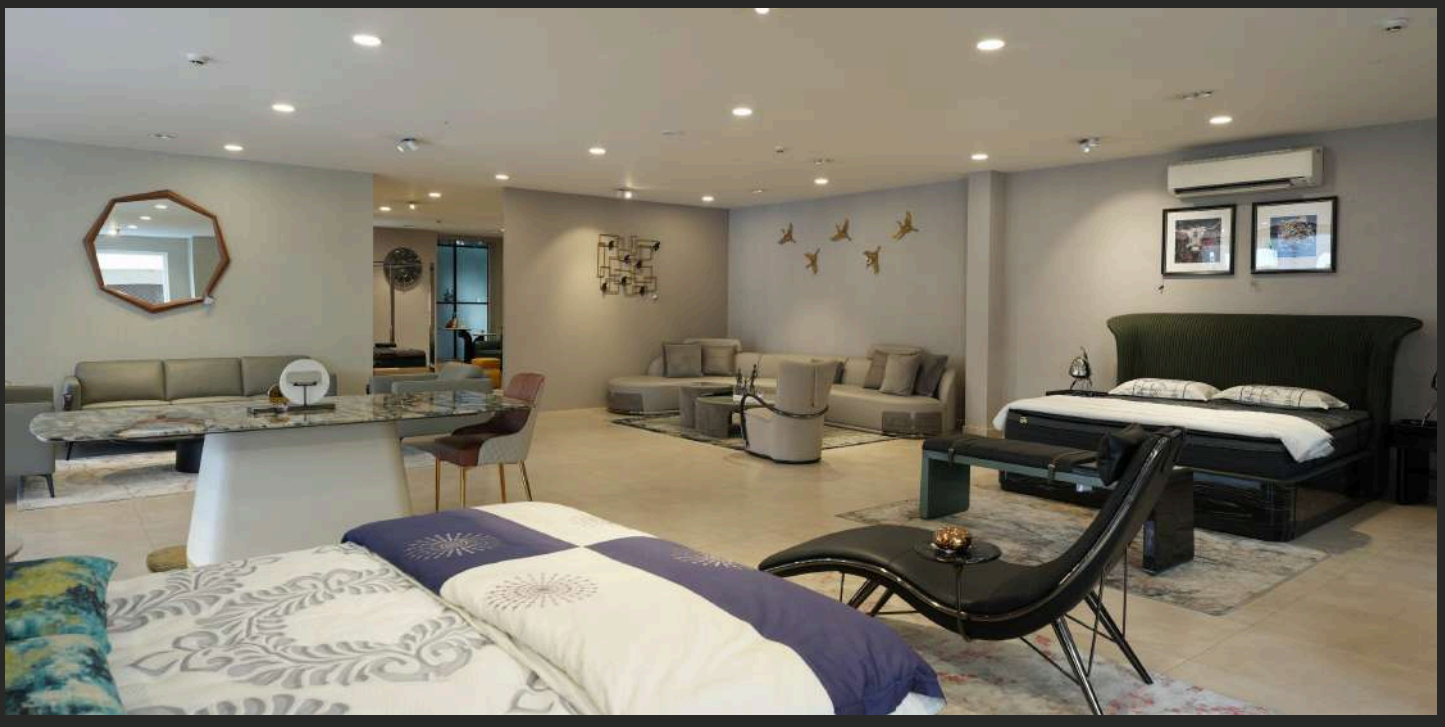



ASTARFIX.1.30.MW.MB.36.90.30G

Outer Size(mm) : Dia 104x75(H)
Cut Out Size : Dia 90mm
Wattage : 30W




ASTARFIX.1.40.MW.MB.36.110.30G

Outer Size(mm) : Dia 124x80(H)
Cut Out Size : Dia 110mm
Wattage : 40W


PRODUCT PROPERTIES

LED	Cree	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	240V / 50Hz	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt White / Matt Black	BEAM ANGLE	36°
IP RATING	IP-20	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac / Analogue / Dali (on request)
		CCT	3000k, 4000k, 6500k

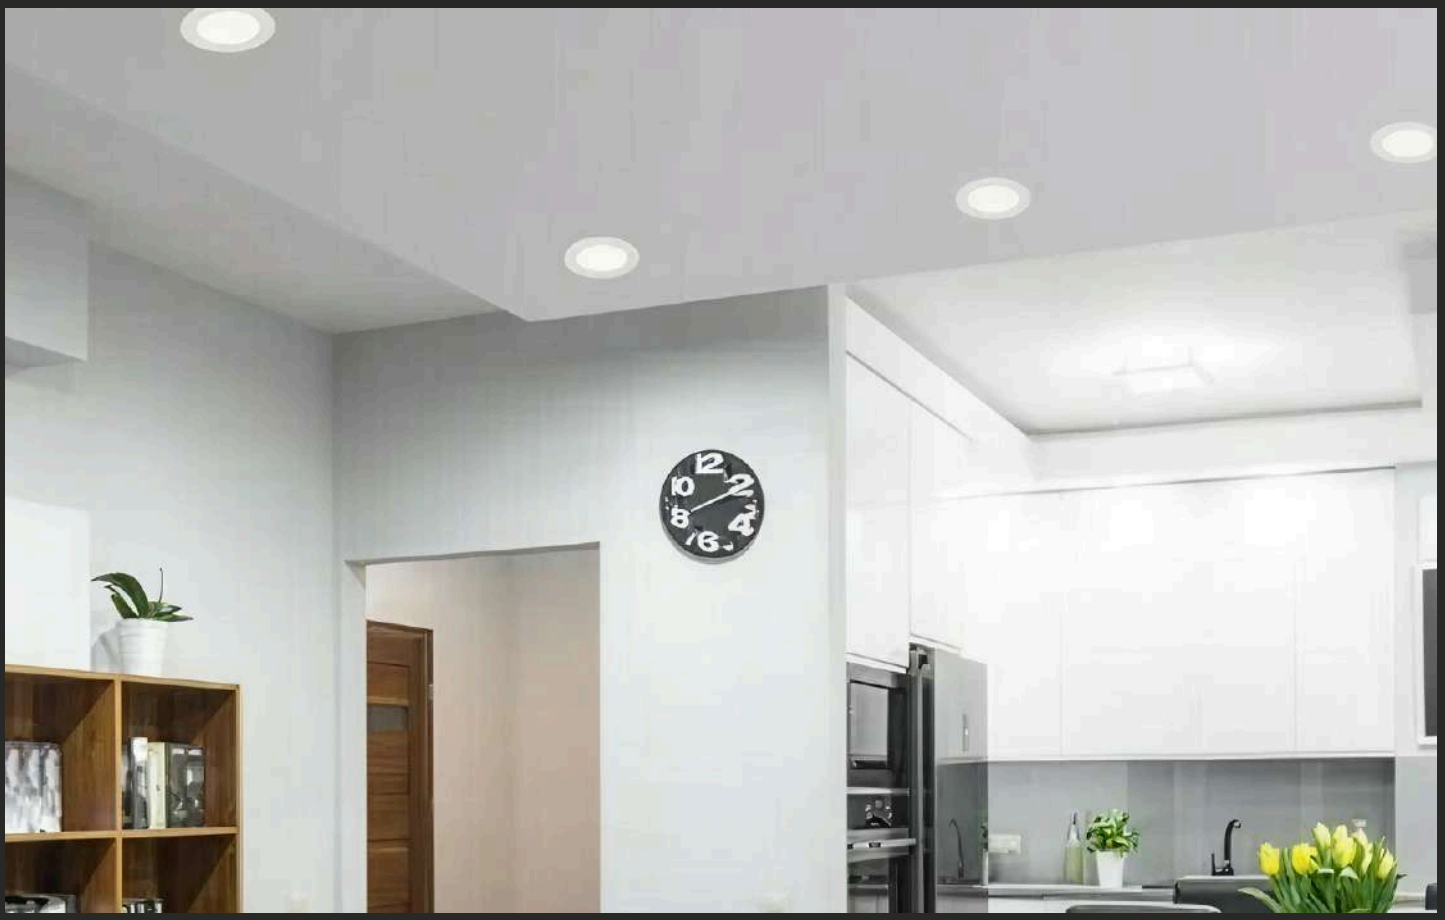

ASTAR FIX


COB SPOTLIGHT SYSTEMS

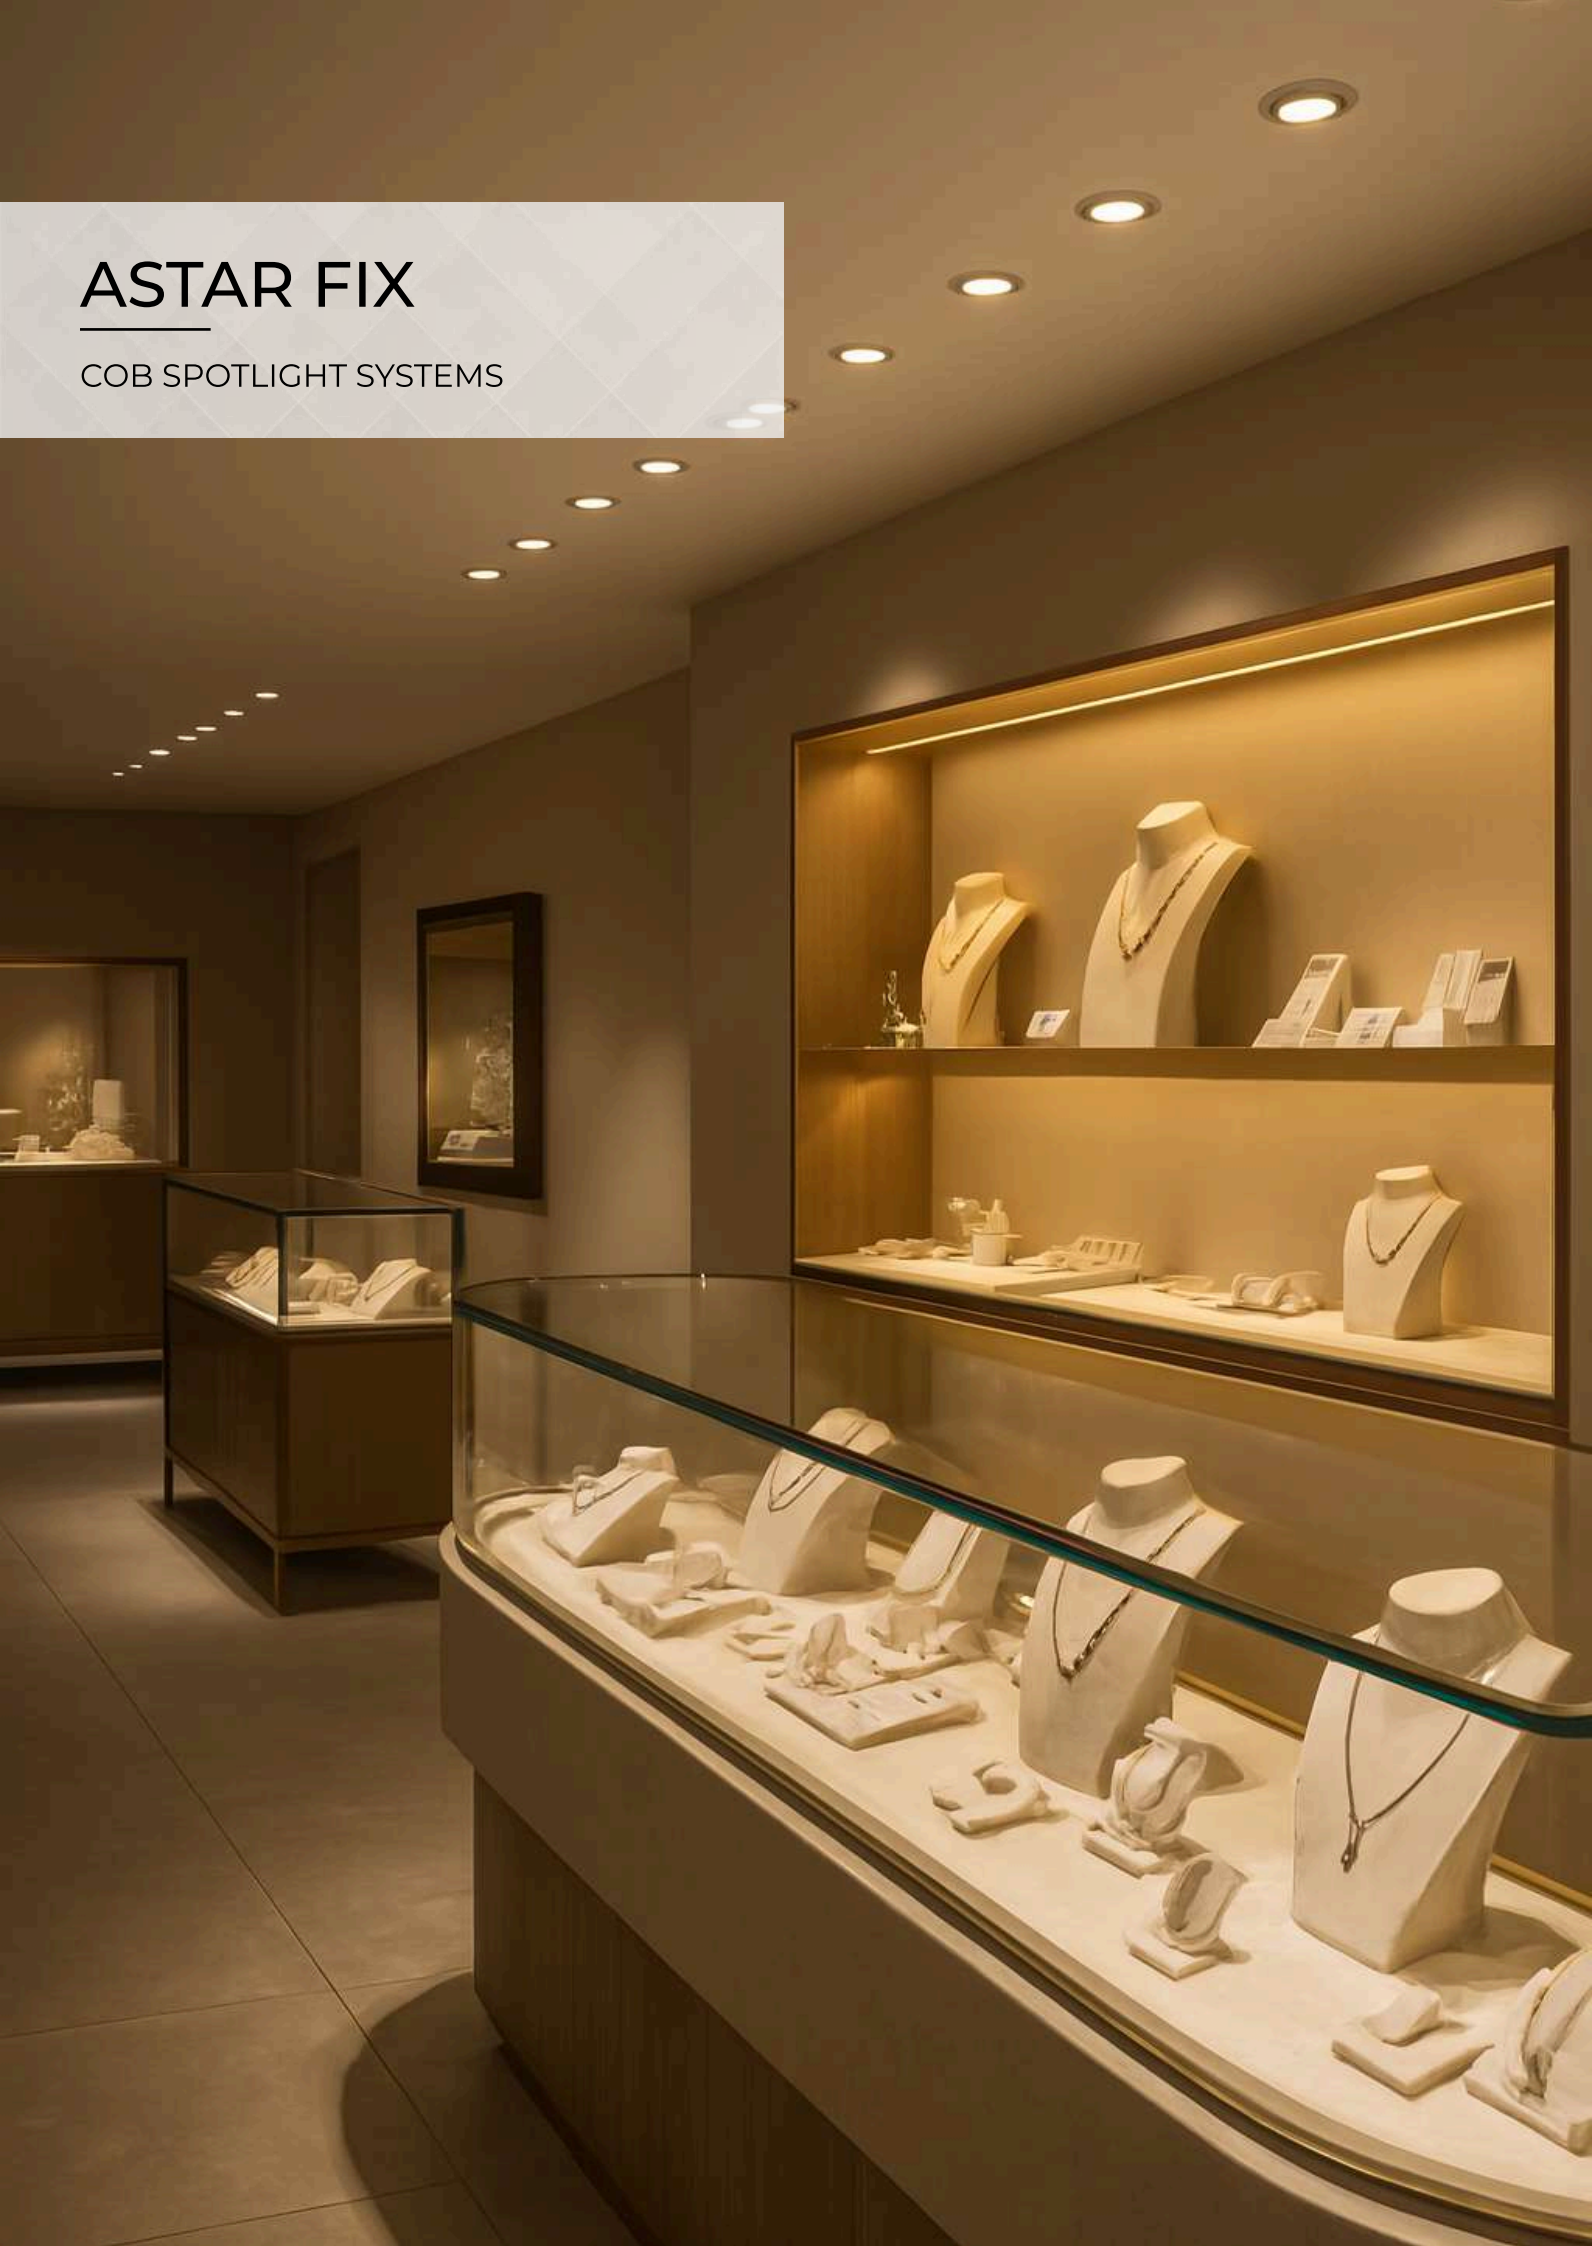



FLAME.1.30.MW.MW.36.110.30G

Outer Size(mm) : Dia 120x82(H)
Cut Out Size : Dia 110mm
Wattage : 30W

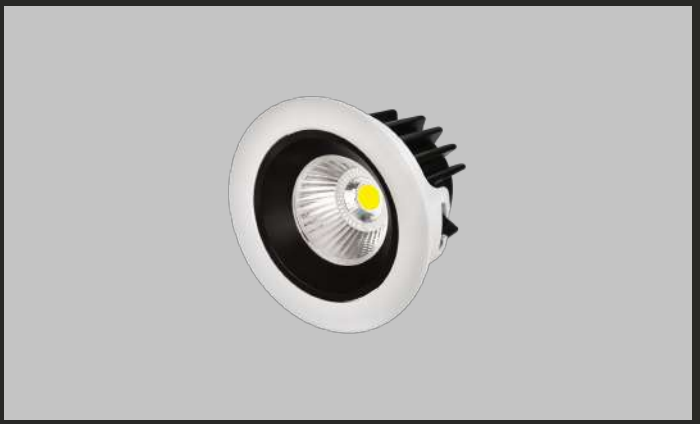

FLAME.1.40.MW.MW.36.128.30G

Outer Size(mm) : Dia 138x86(H)
Cut Out Size : Dia 128mm
Wattage : 40W

PRODUCT PROPERTIES

LED	Cree	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	240V / 50Hz	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL ANGLE	Tiltable
REFLECTOR	Matt White / Matt Black	BEAM ANGLE	36°
IP RATING	IP 20	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac / Analogue (On Request)
		CCT	3000k, 4000, 6500k





DENS0.1.10.MW.MW.40.73.30S

Outer Size(mm) : Dia 85x90(H)
Cut Out Size : Dia 73mm
Wattage : 10W

PRODUCT PROPERTIES


LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt White / Matt Black	BEAM ANGLE	40°
IP RATING	IP 44 (Moisture Proof)	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Osram
		LIGHT COLOUR	2700k, 3000k, 3500k, 4000k, 5000k, 5700k, 6500k





FLAME

COB SPOTLIGHT SYSTEMS

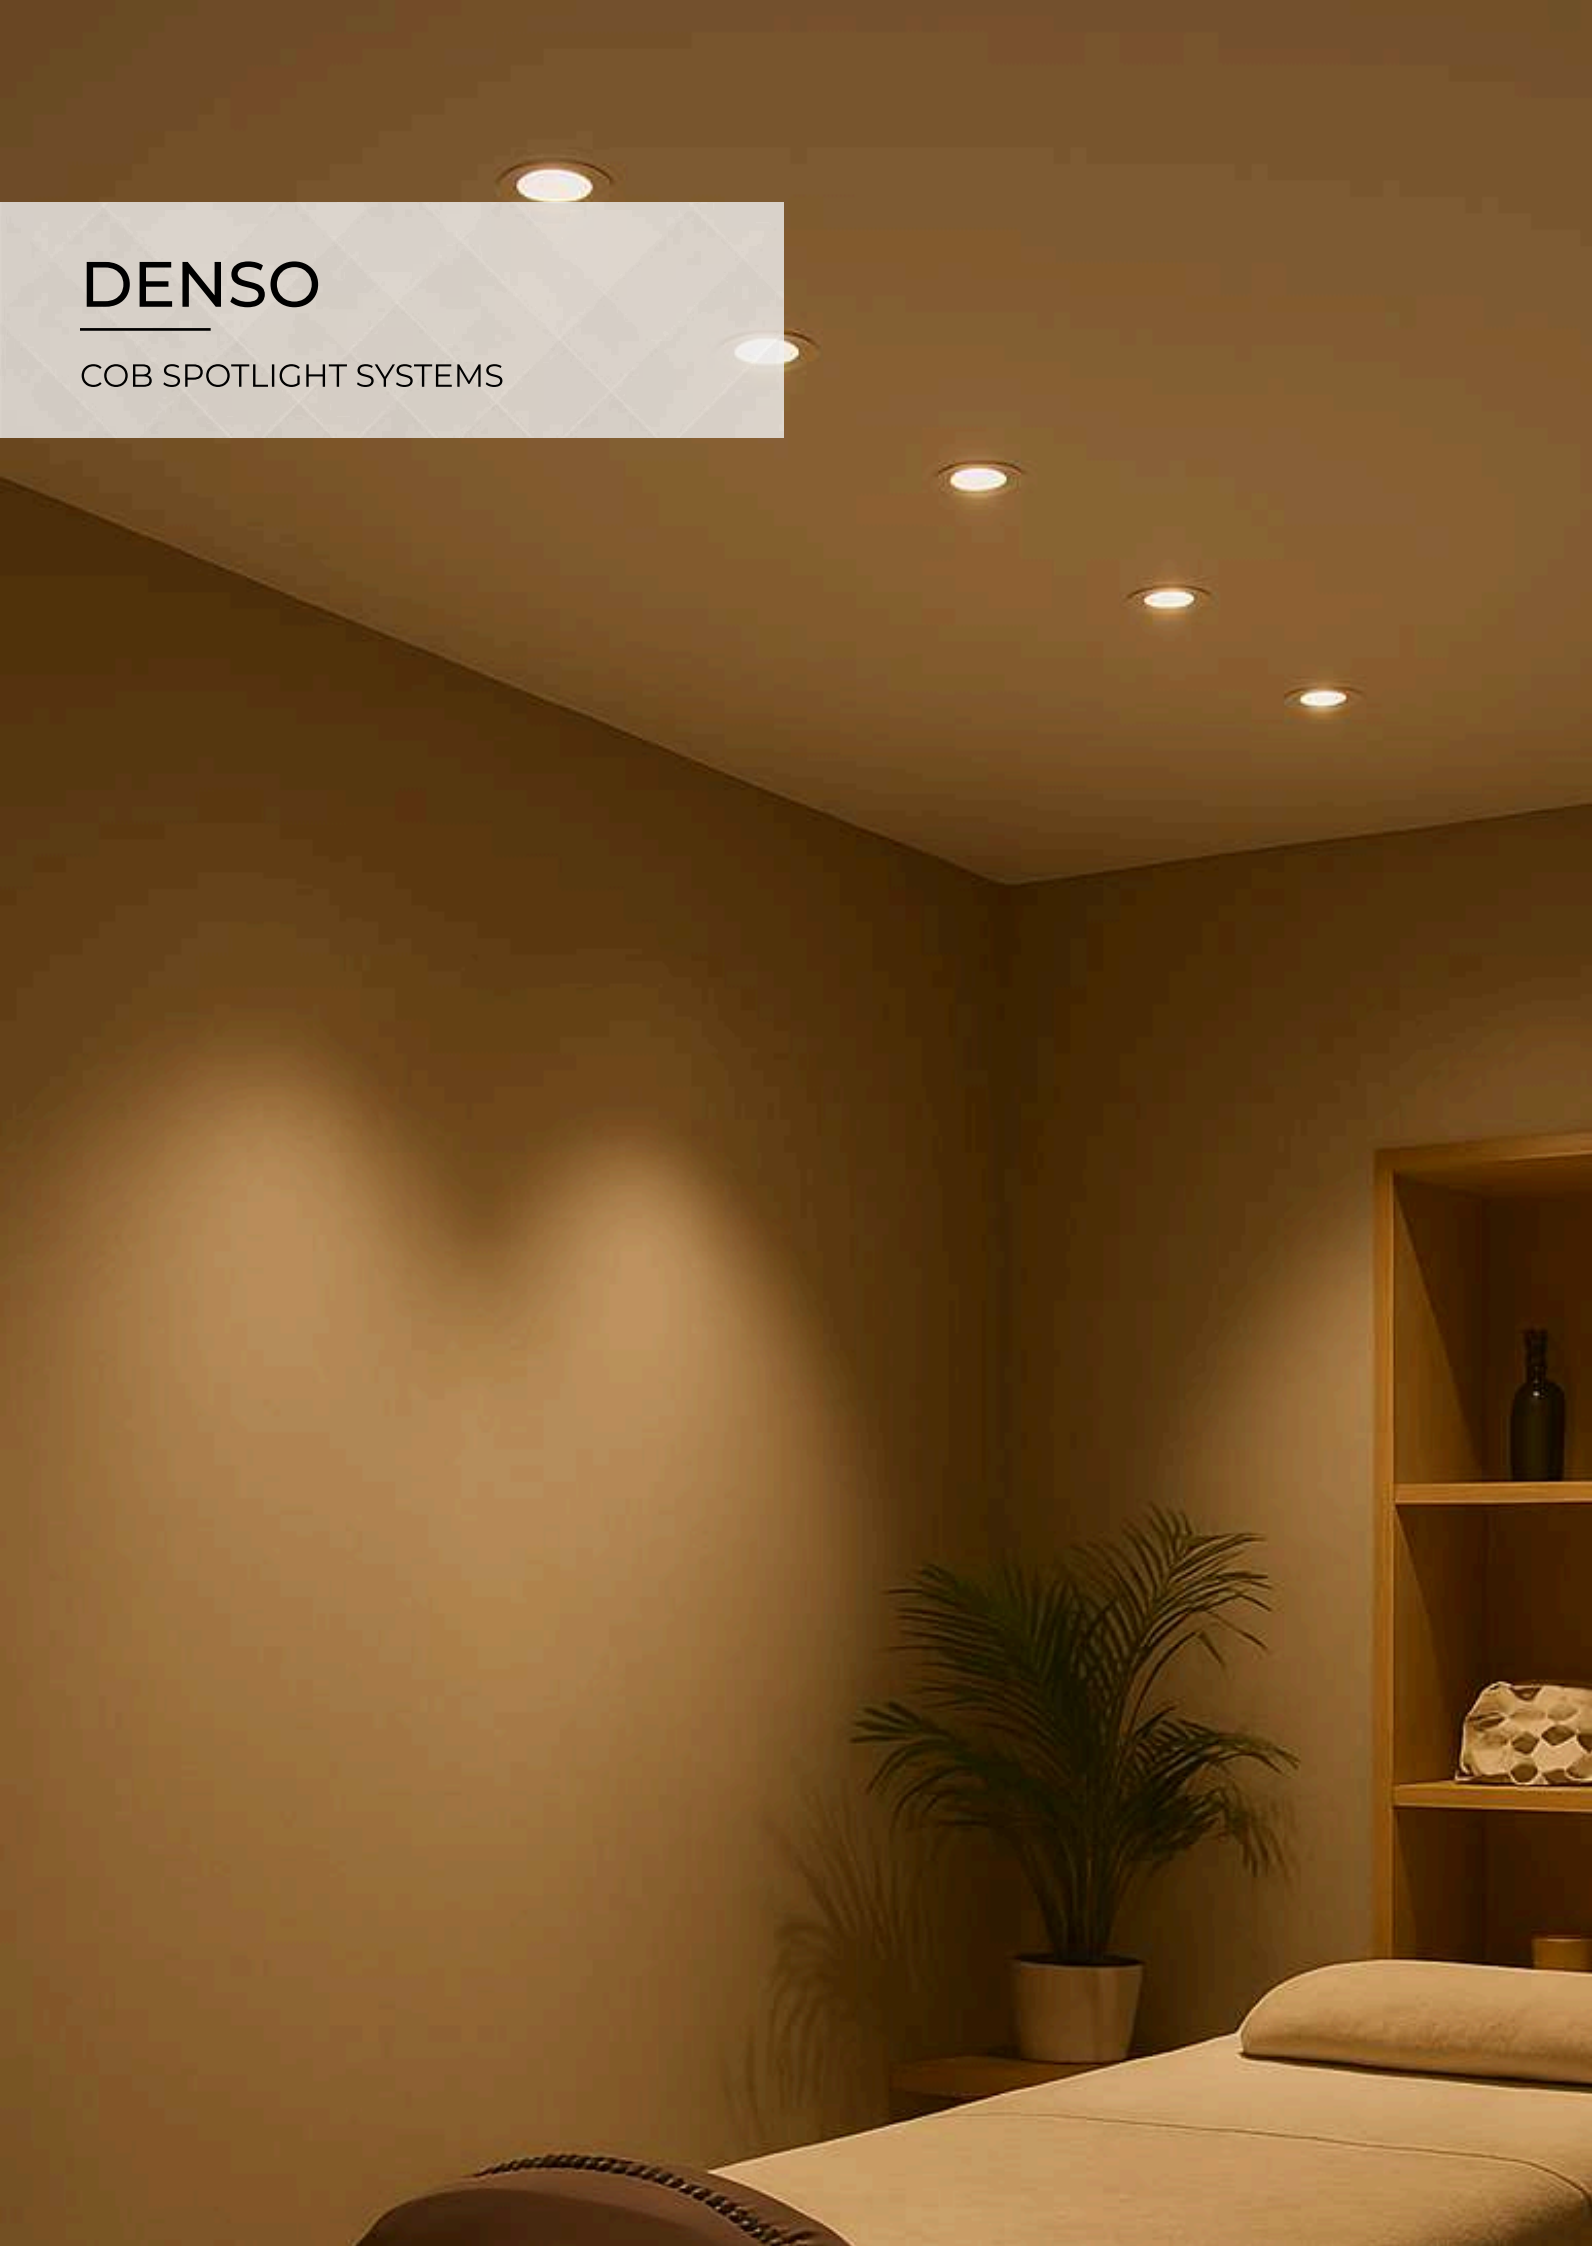


DENSO

COB SPOTLIGHT SYSTEMS


SWEEP

COB SPOTLIGHT SYSTEMS

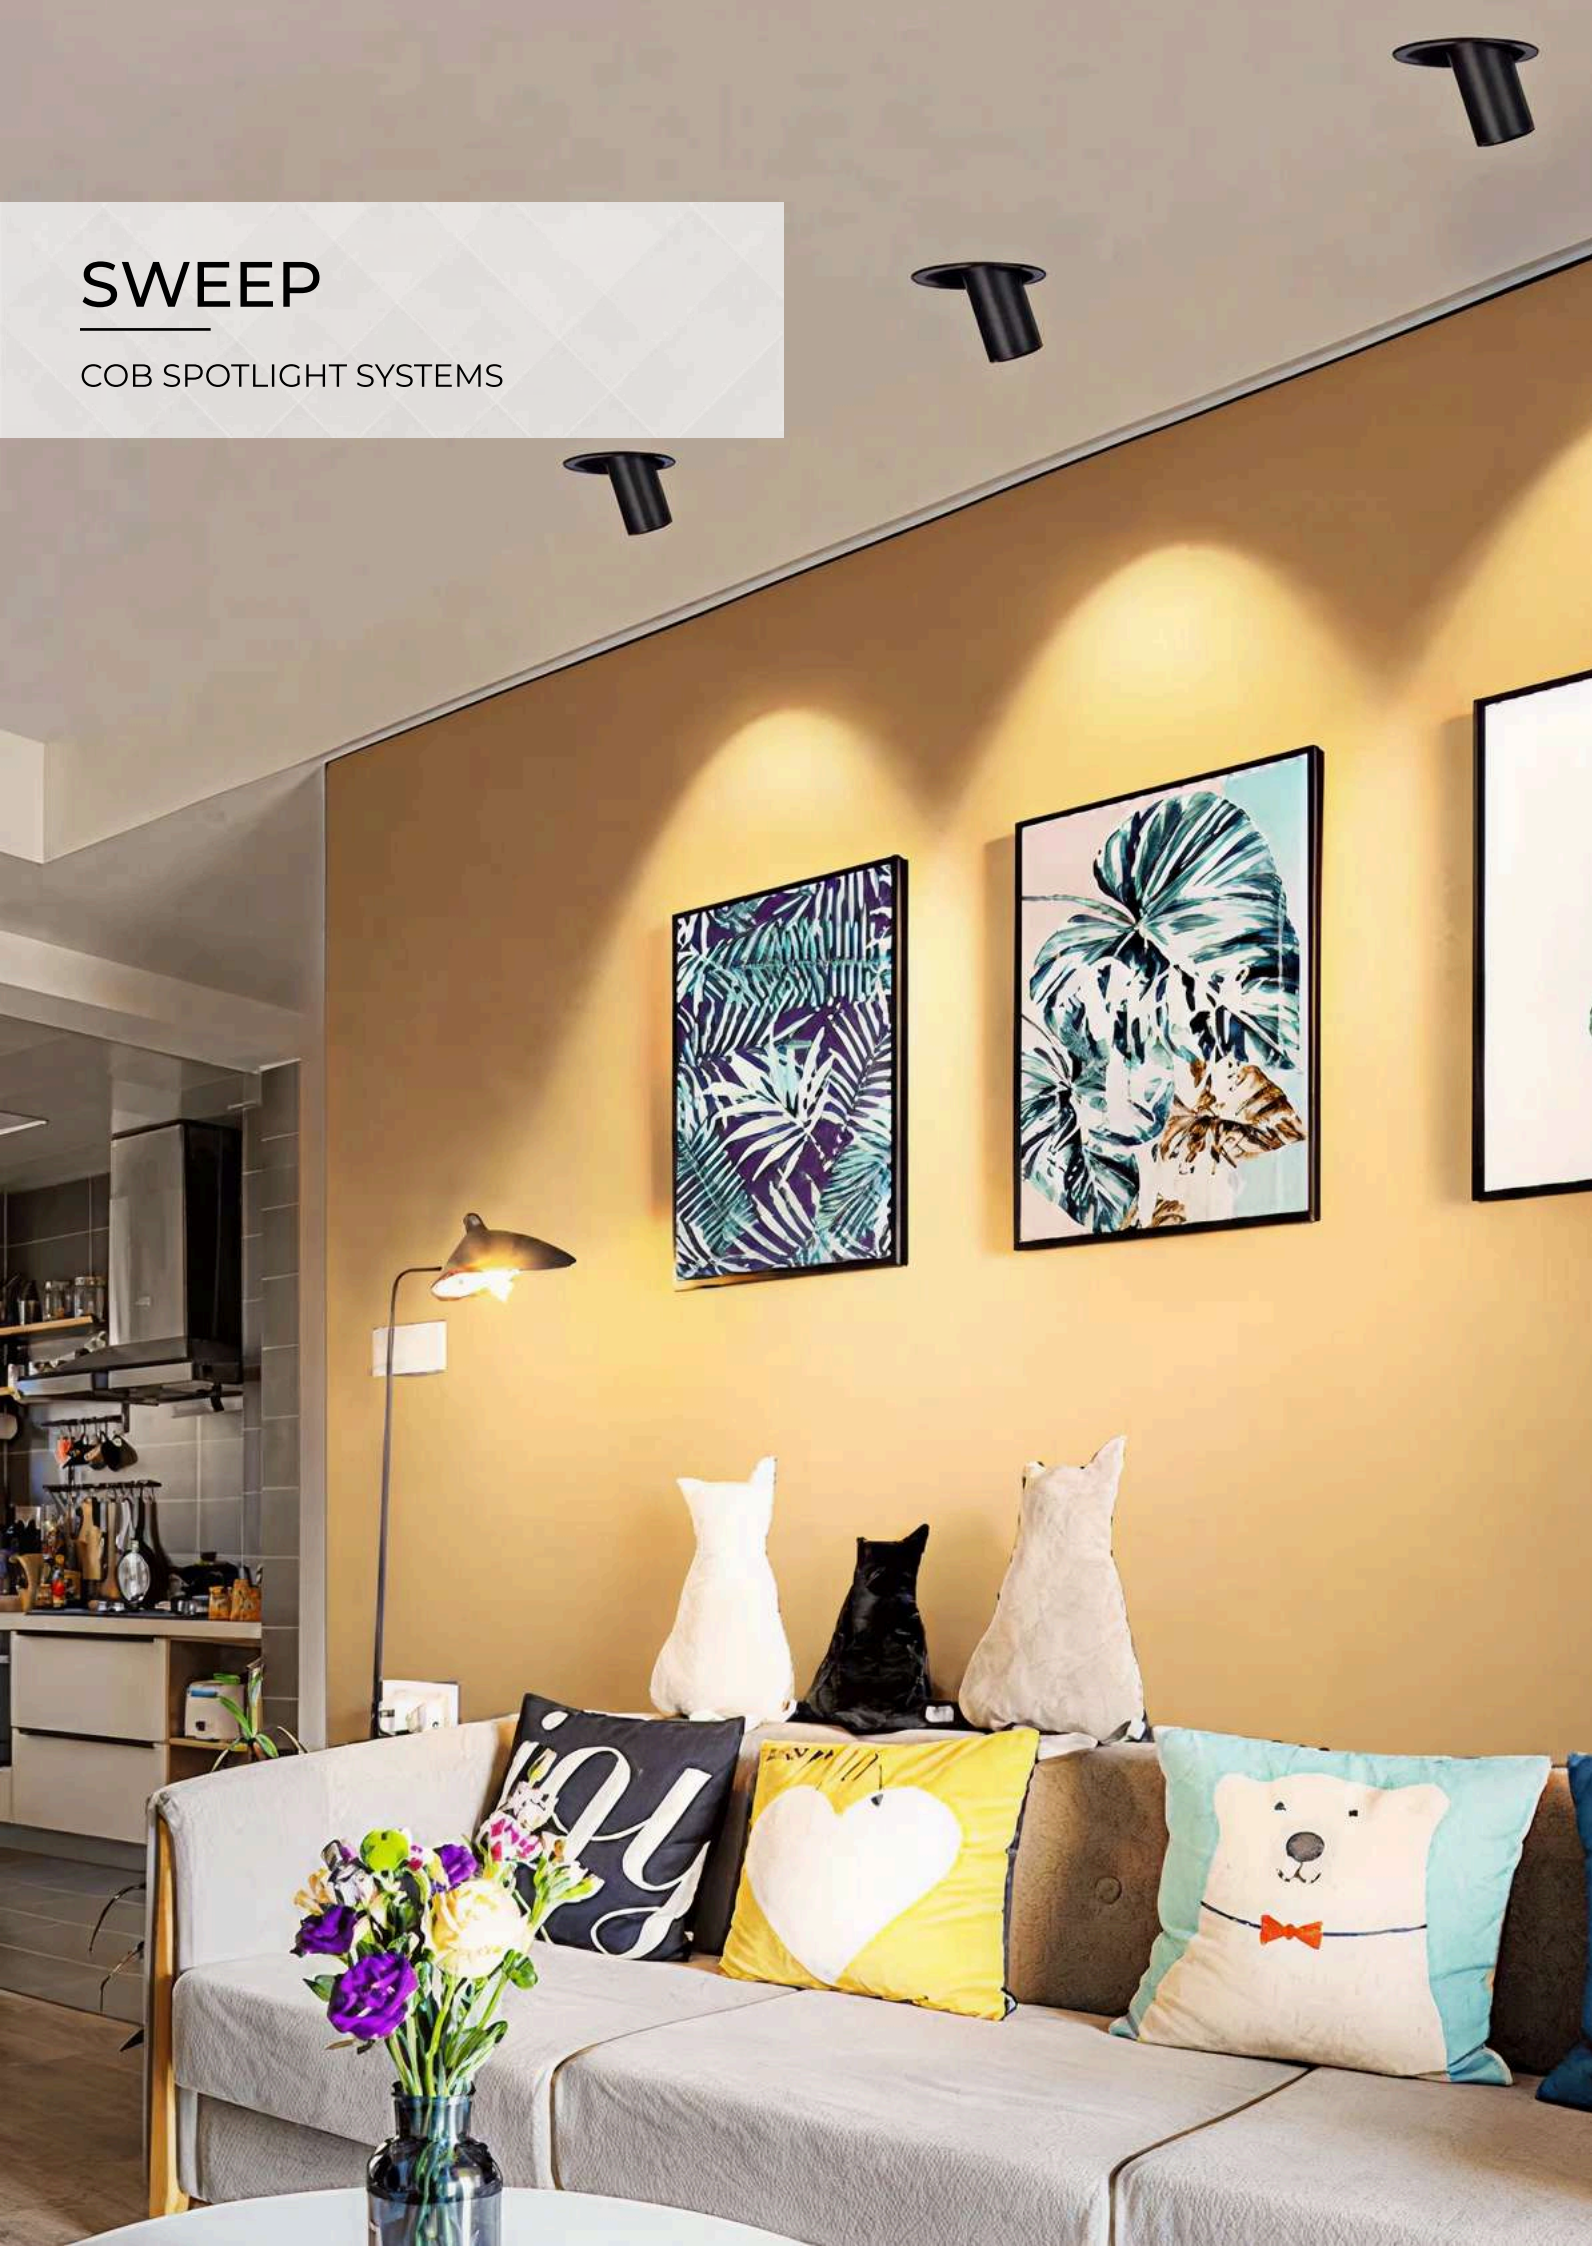








SWEEP.1.12.SW.MB.36.90.30S

Outer Size(mm) : Dia 100x97(H)
Cylinder Size(mm) : Dia 65x83(L)
Cut Out Size : 90mm
Wattage : 12W


PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Sand White / Matt Black	SWIVEL / FIXED	Zoom Out Swivel & Tilt 360°
REFLECTOR FINISH	Matt Black	BEAM ANGLE	36°
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Osram
		CCT	2700k, 3000k, 3500k, 4000k, 5000k, 5700k, 6500k

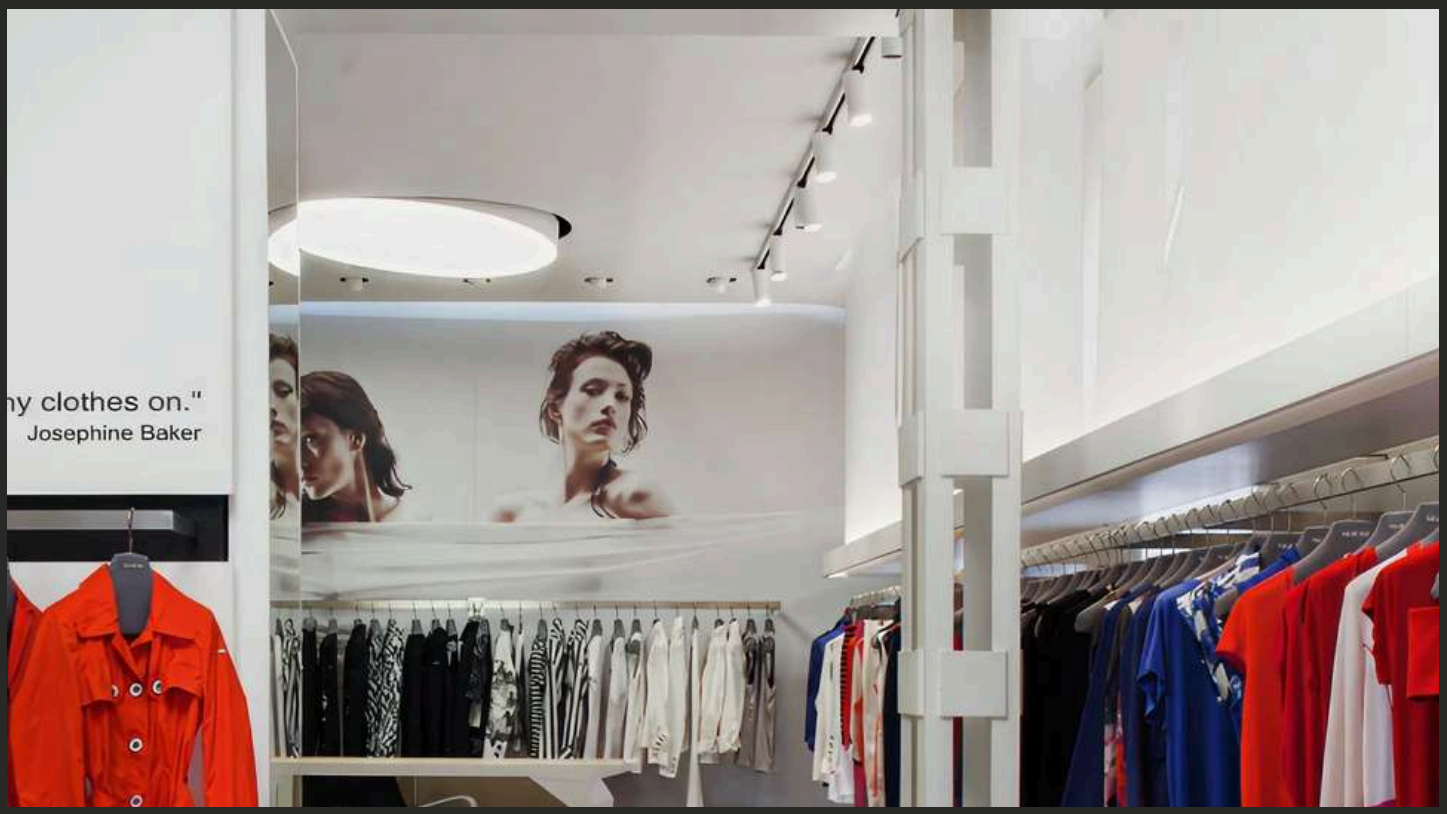


SHOOT

COB SPOTLIGHT SYSTEMS

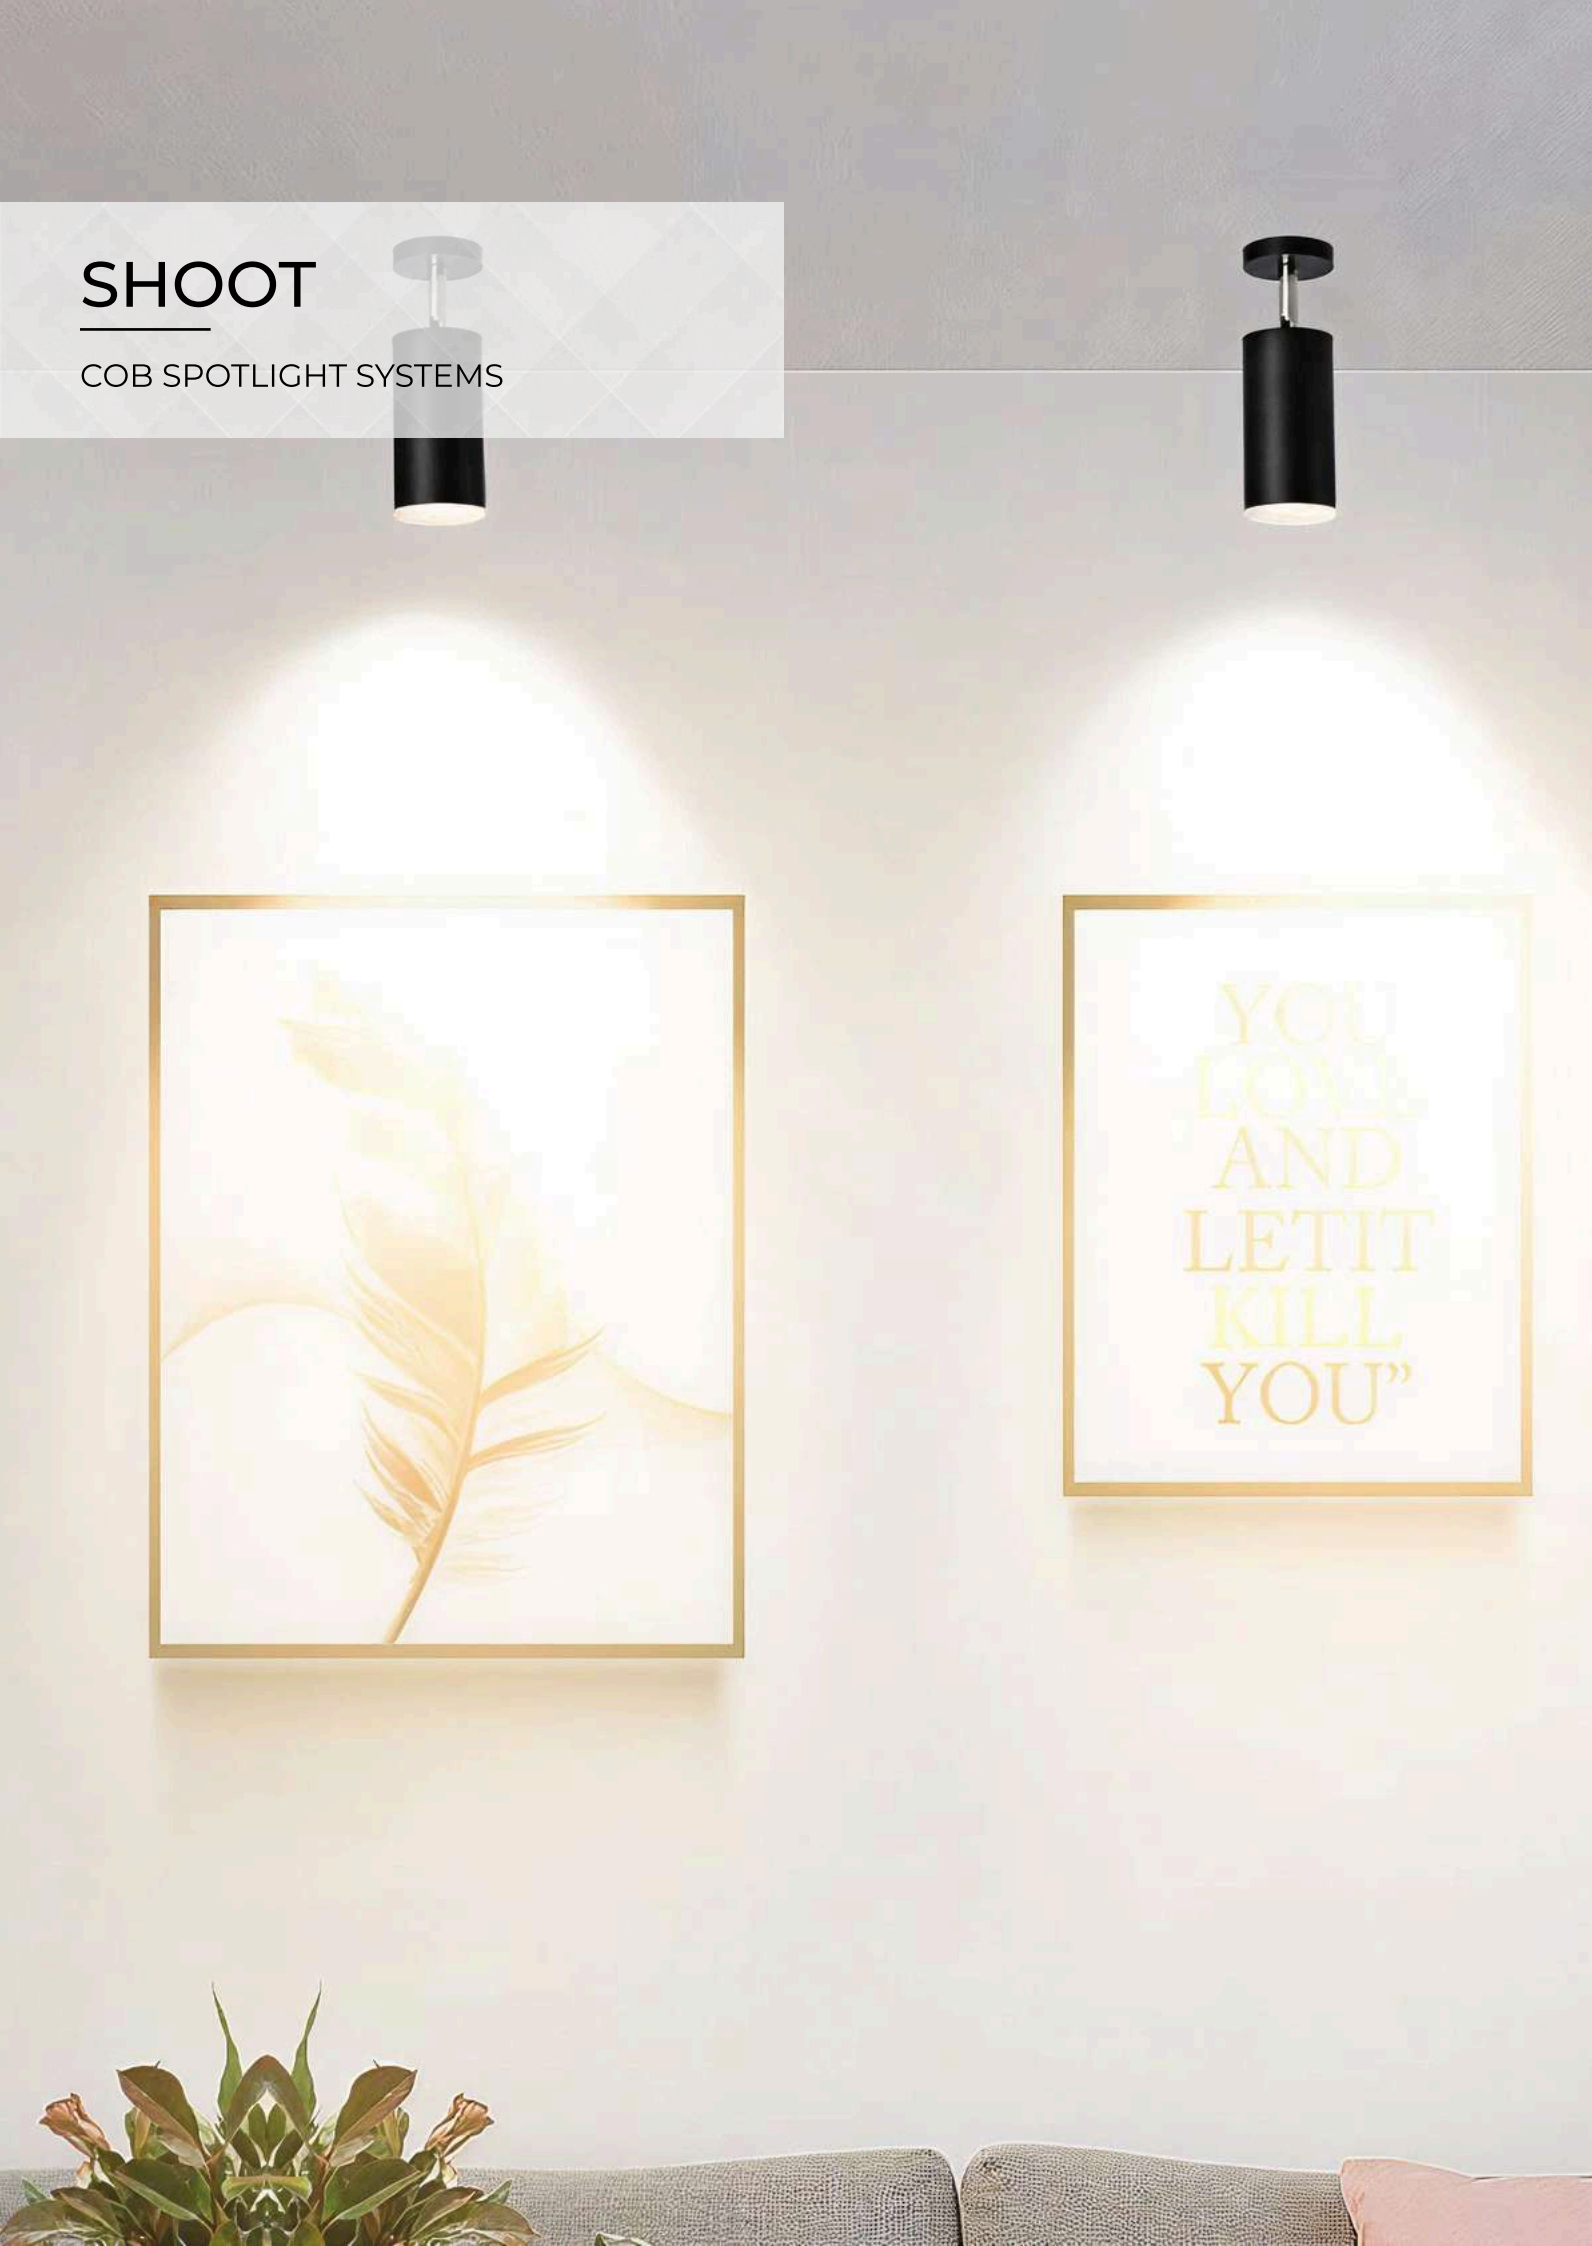





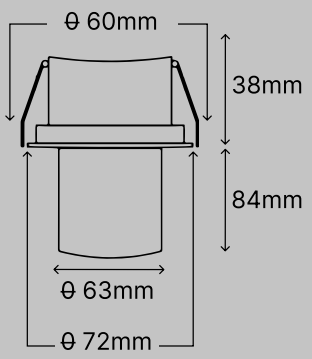

SHOOT.1.12.SW.MB.38.60.30S

Outer Size(mm) : Dia 72x38(H)
Cylinder Size(mm) : Dia 63x84(L)
Cut Out Size : 60mm
Wattage : 12W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Sand White / Matt Black	SWIVEL / FIXED	Zoom Out Swivel & Tilt 360°
REFLECTOR FINISH	Matt Black	BEAM ANGLE	38°
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Osram
		LIGHT COLOUR	2700k, 3000k, 3500k, 4000k, 5000k, 5700k, 6500k






CHASE

COB SPOTLIGHT SYSTEMS



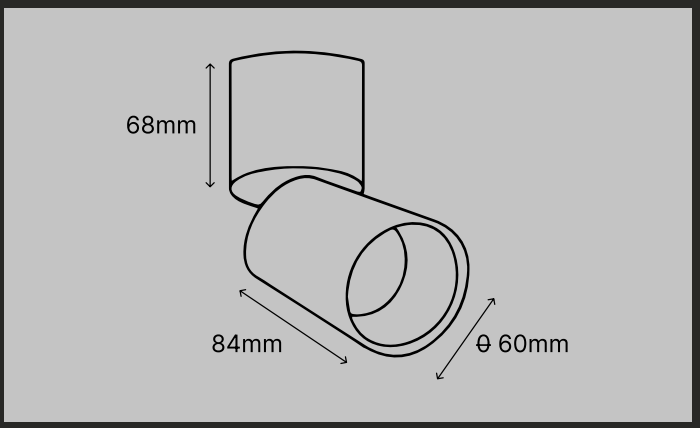

CHASE.1.7.MW.MW.36.SF.30S

Outer Size(mm) : Dia 60x152(H)
Wattage : 7W

CHASE.1.12.MW.MW.36.SF.30S


Outer Size(mm) : Dia 60x152(H)
Wattage : 12W

PRODUCT PROPERTIES

LED	Osram
INPUT VOLTAGE	220-240V ac
PRODUCT FINISH	Matt White / Matt Black
REFLECTOR FINISH	Matt Black
IP RATING	IP 20
OPERATING TEMPERATURE	0-50°c

HOUSING MATERIAL	Aluminium Die Cast
CRI	>90
SWIVEL / FIXED	Swivel & Tilt 360°
BEAM ANGLE	36°
DIMMABLE	Triac / Analogue / Dali (on request)
DRIVER BRAND	Osram
CCT	2700k, 3000k, 3500k, 4000k, 5000k, 5700k, 6500k



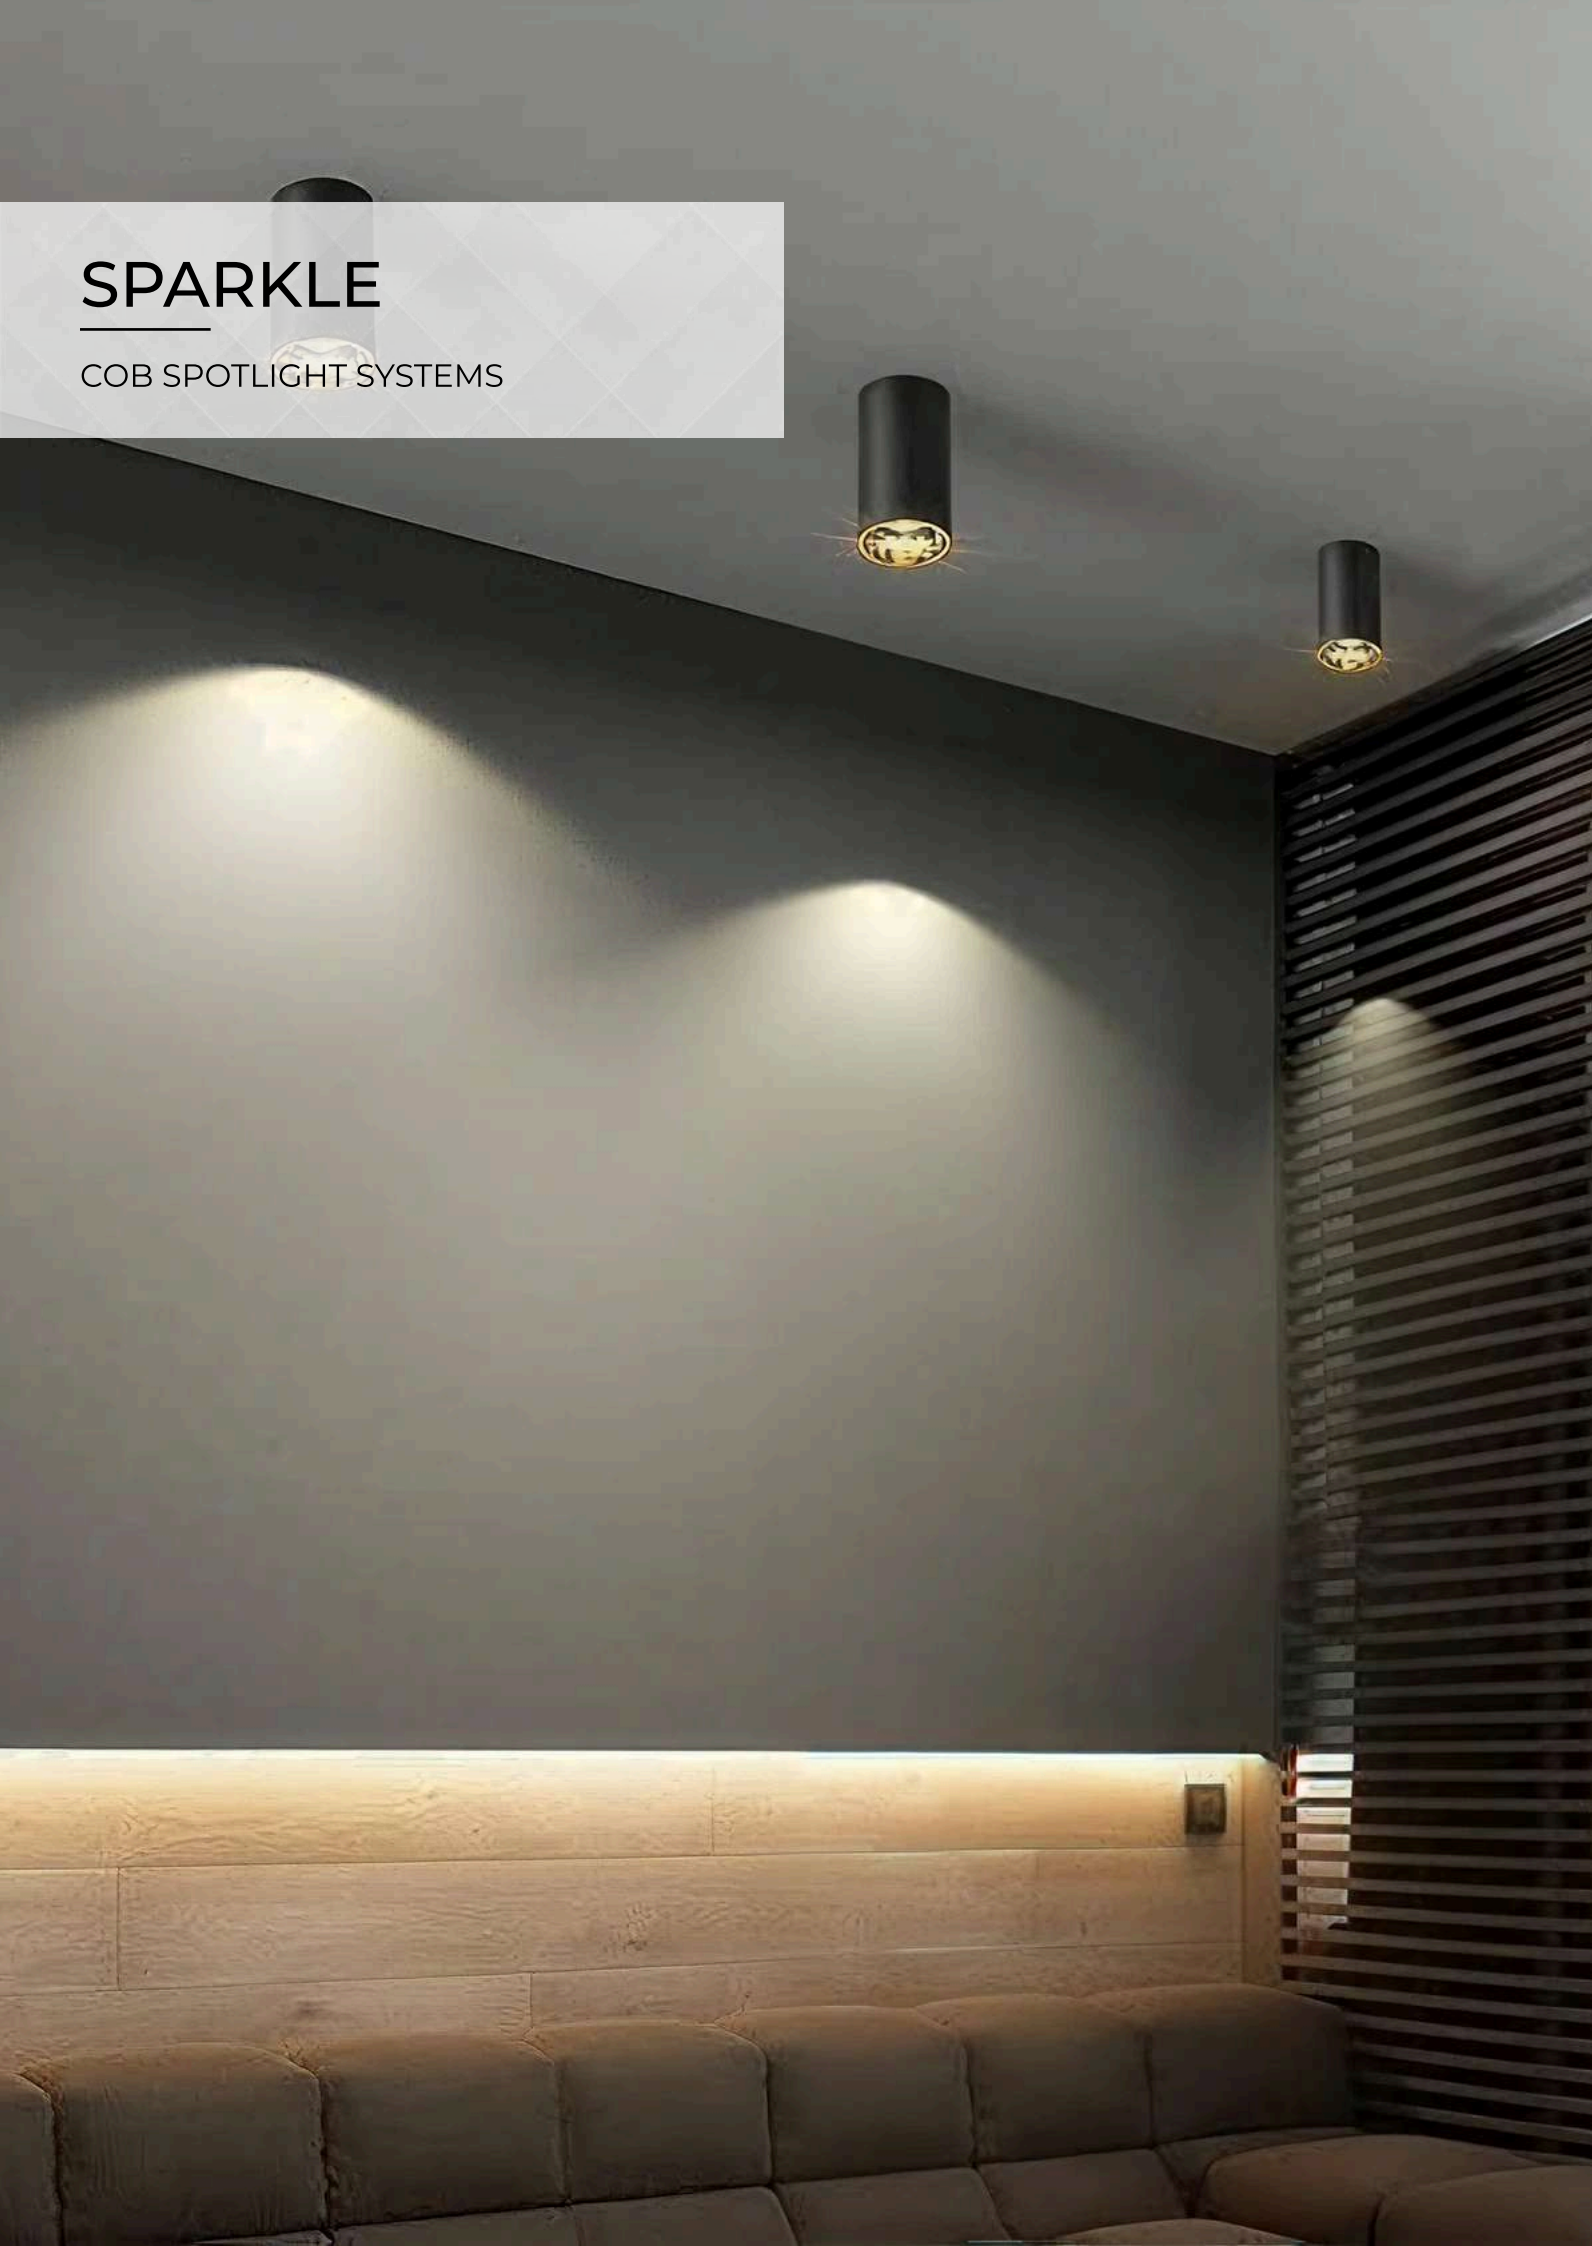

SPARKLE

COB SPOTLIGHT SYSTEMS



SPARKLE.1.7.MB.MB.36.SF.30S

Outer Size(mm) : Dia 53x92(H)
Wattage : 7W




SPARKLE.1.12.MW.MB.36.SF.30S

Outer Size(mm) : Dia 75x106(H)
Wattage : 12W

PROUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt Black	BEAM ANGLE	36°
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Osram
		CCT	2700k, 3000k, 3500k, 4000k, 5000k, 5700k, 6500k



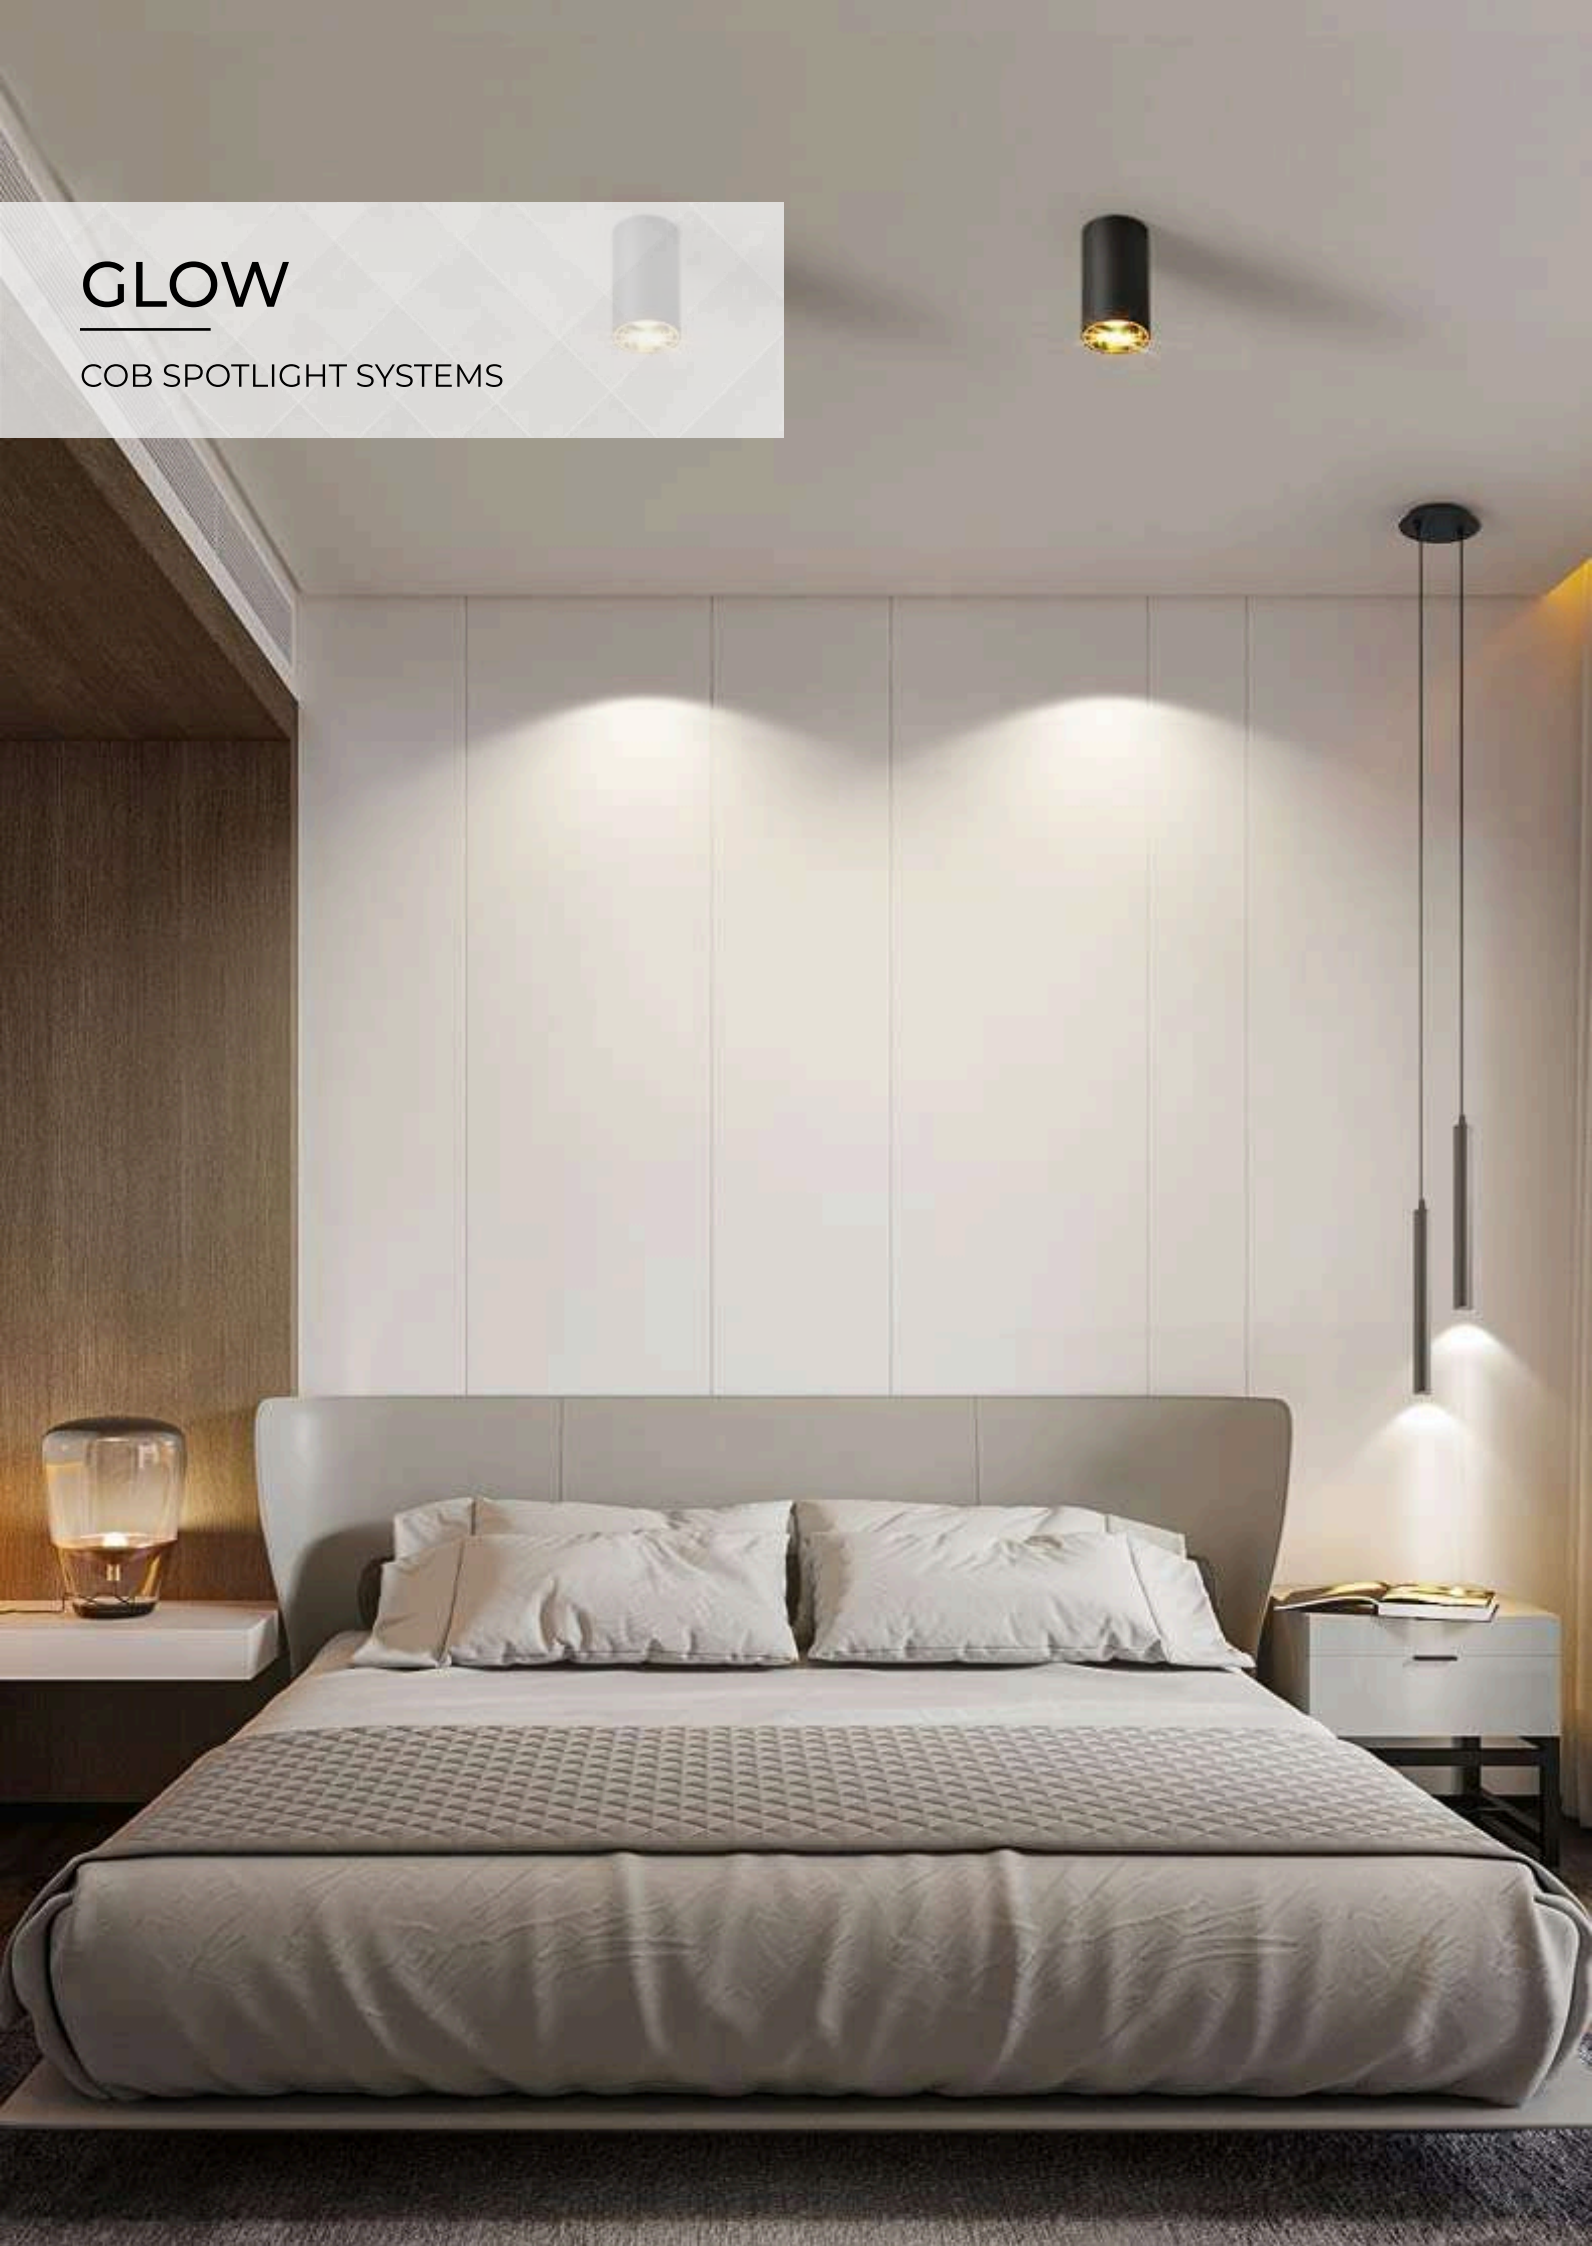

GLOW

COB SPOTLIGHT SYSTEMS



GLOW.1.7.MB.NI.36.SF.30S

Outer Size(mm) : 64(L)x70(H)
Wattage : 7W




GLOW.1.12.MB.NI.36.SF.30S

Outer Size(mm) : 88(L)x90(H)
Wattage : 12W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	240V / 50Hz	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL ANGLE	Fixed
REFLECTOR FINISH	Nickel	BEAM ANGLE	36°
IP RATING	IP 20	DRIVER BRAND	Osram
OPERATING TEMPERATURE	0-50°c	DIMMABLE	Triac / Analogue / Dali (on Request)
		CCT	3000k, 4000, 6500k



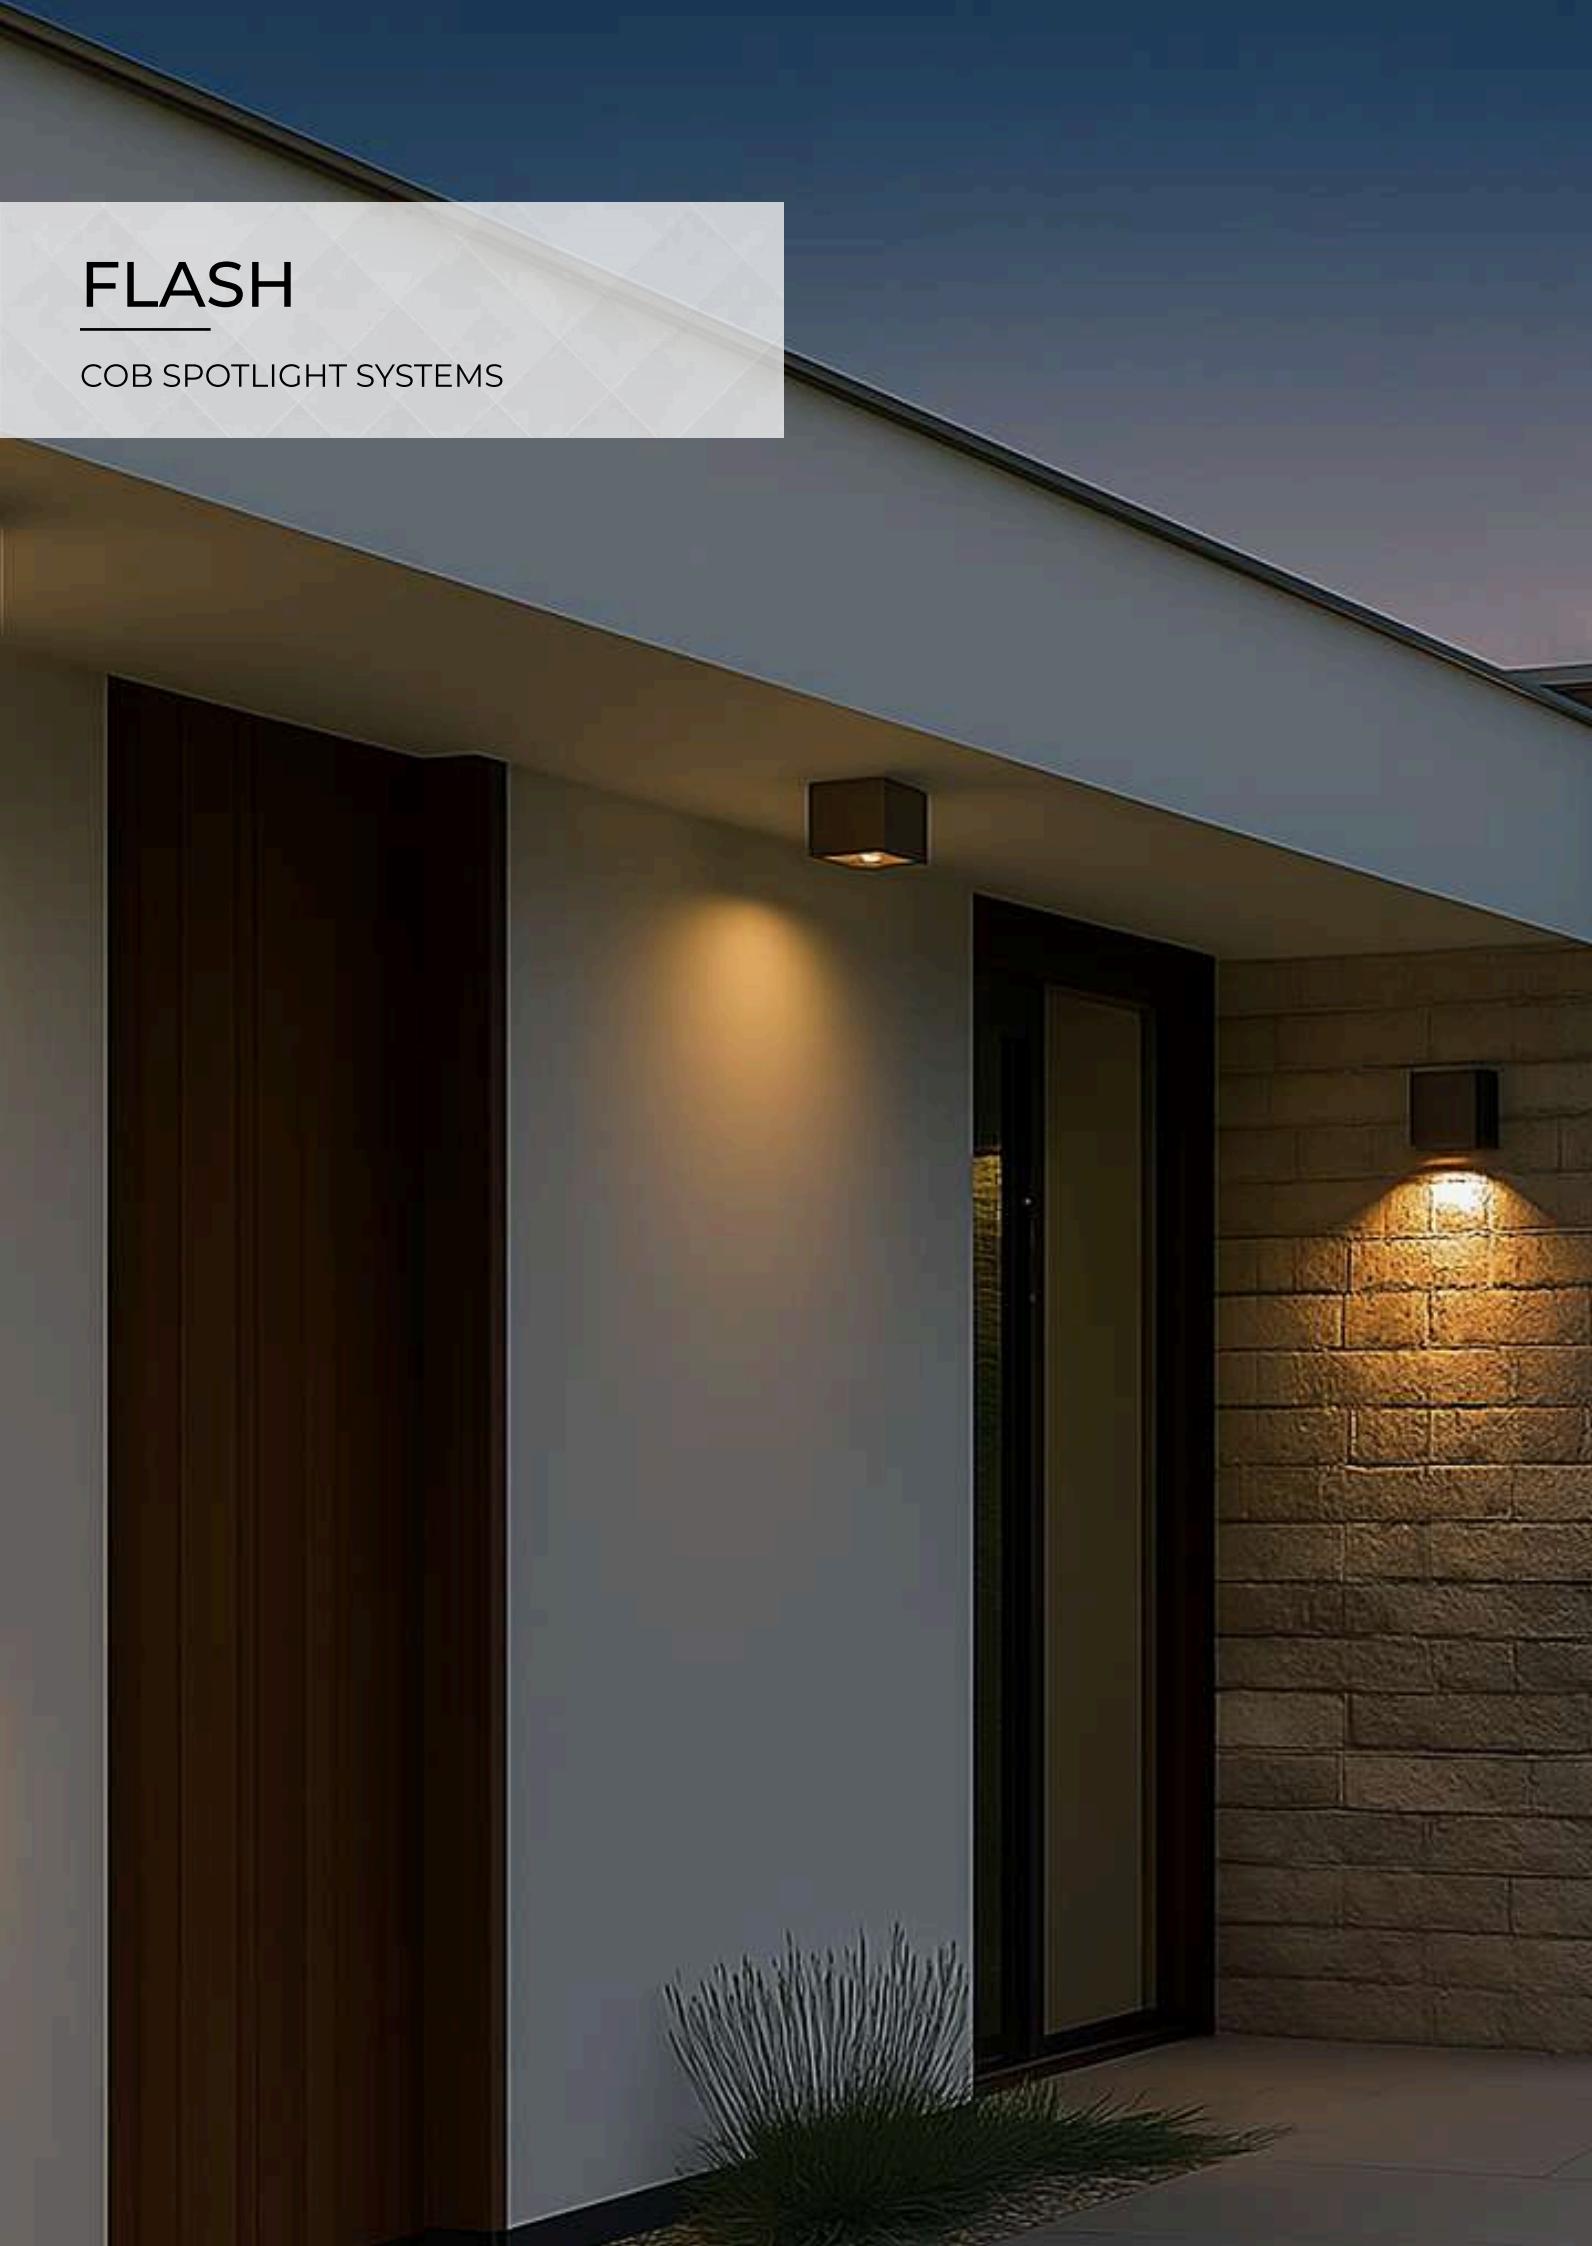


FLASH

COB SPOTLIGHT SYSTEMS



FLASH.1.7.MB.RG.36.SF.30G

Outer Size(mm) : 55(L)x55(W)x80(H)
Wattage : 7W

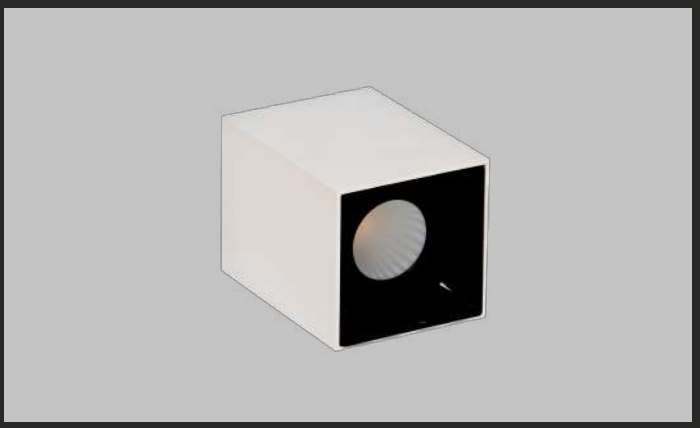


FLASH.1.12.MW.GB.36.SF.30G

Outer Size(mm) : 74(L)x74(W)x95(H)
Wattage : 12W

Product Properties

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Glossy Black / Rose Gold	BEAM ANGLE	36°
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Osram
		CCT	3000k, 4000k, 6500k



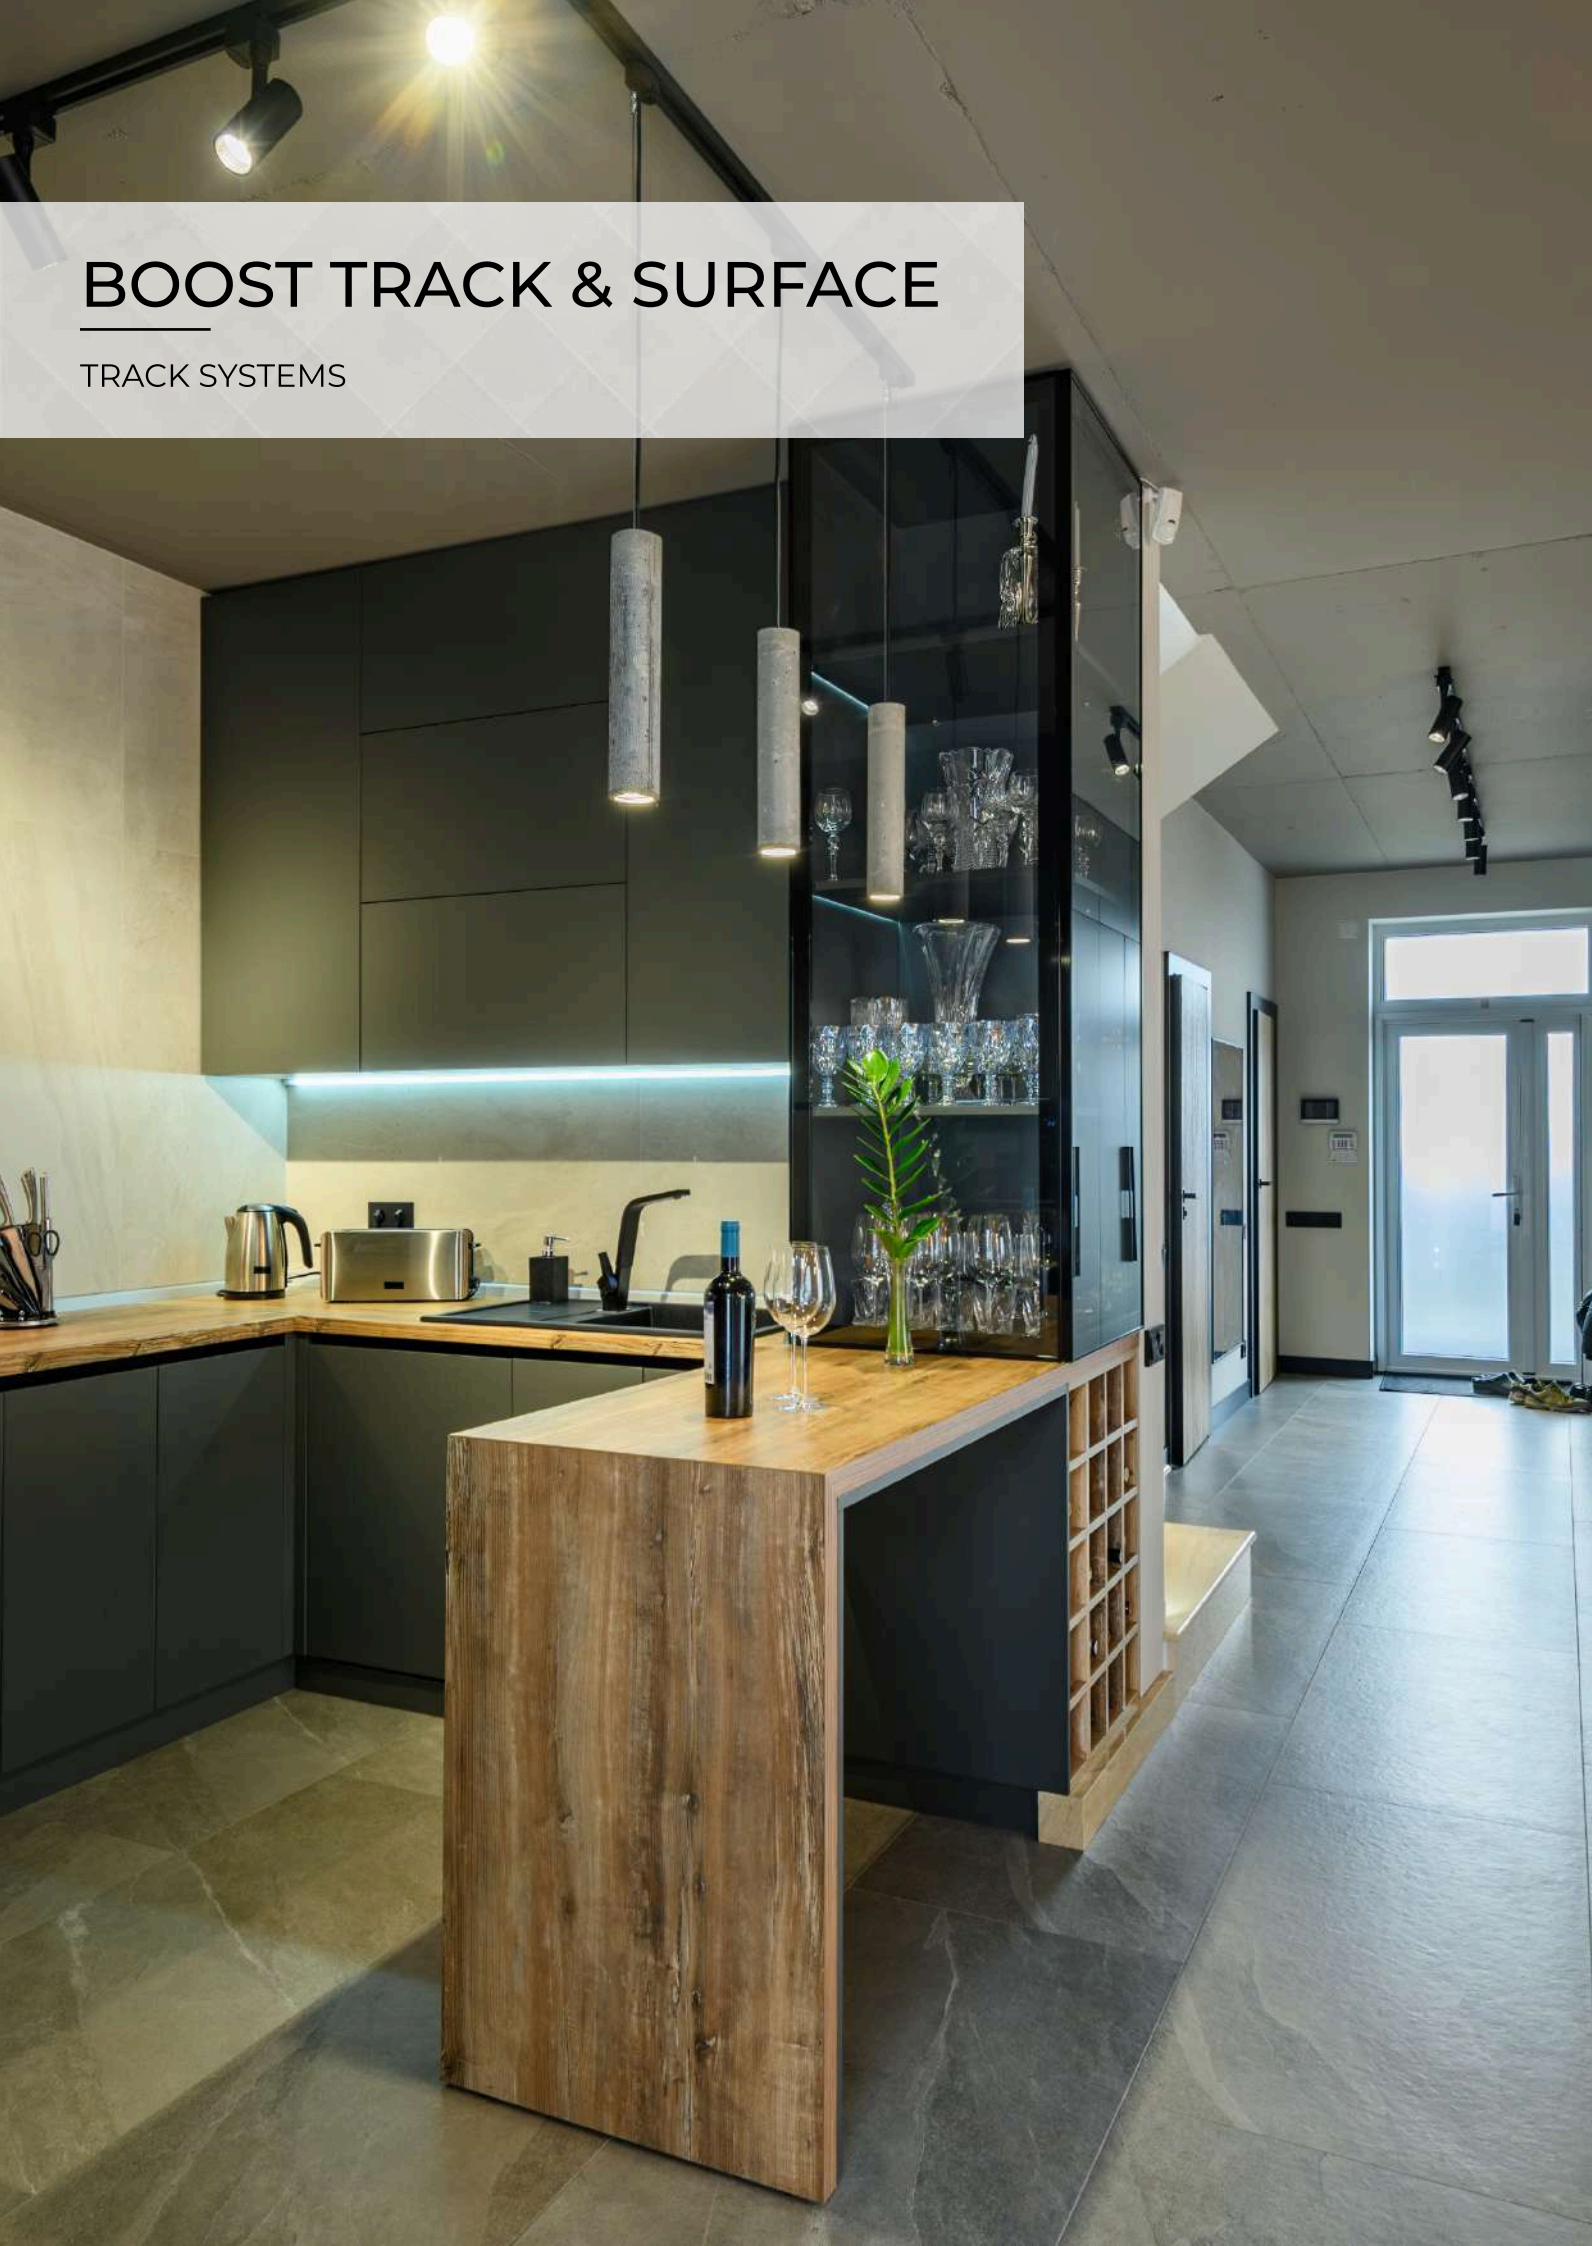

BOOST TRACK & SURFACE

TRACK SYSTEMS



BOOST TRACK.1.18.BLK.BLK.36.90.30S

Outer Size(mm) : Dia 90x92(W)
Cut Out Size : N.A.
Wattage : 18W

BOOST TRACK.1.30.BLK.BLK.36.90.30S

Outer Size(mm) : Dia 90x92(W)
Cut Out Size : N.A.
Wattage : 30W

BOOST TRACK.1.40.BLK.BLK.36.110.30S

Outer Size(mm) : Dia 110x106(W)
Cut Out Size : N.A.
Wattage : 40W



BOOST SURFACE.1.18.BLK.BLK.36.90.30S

Outer Size(mm) : Dia 90x92(W)
Cut Out Size : N.A.
Wattage : 18W

BOOST SURFACE.1.30.BLK.BLK.36.90.30S

Outer Size(mm) : Dia 90x92(W)
Cut Out Size : N.A.
Wattage : 30W


BOOST SURFACE.1.40.BLK.BLK.36.110.30S

Outer Size(mm) : Dia 110x106(W)
Cut Out Size : N.A.
Wattage : 40W

PRODUCT PROPERTIES

LED	Cree	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	240V / 50Hz	CRI	>90
PRODUCT FINISH	Matt White / Matt Black	SWIVEL / FIXED	355°
REFLECTOR FINISH	Matt White / Matt Black	BEAM ANGLE	36°
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Osram
		CCT	3000k, 4000k, 6500k



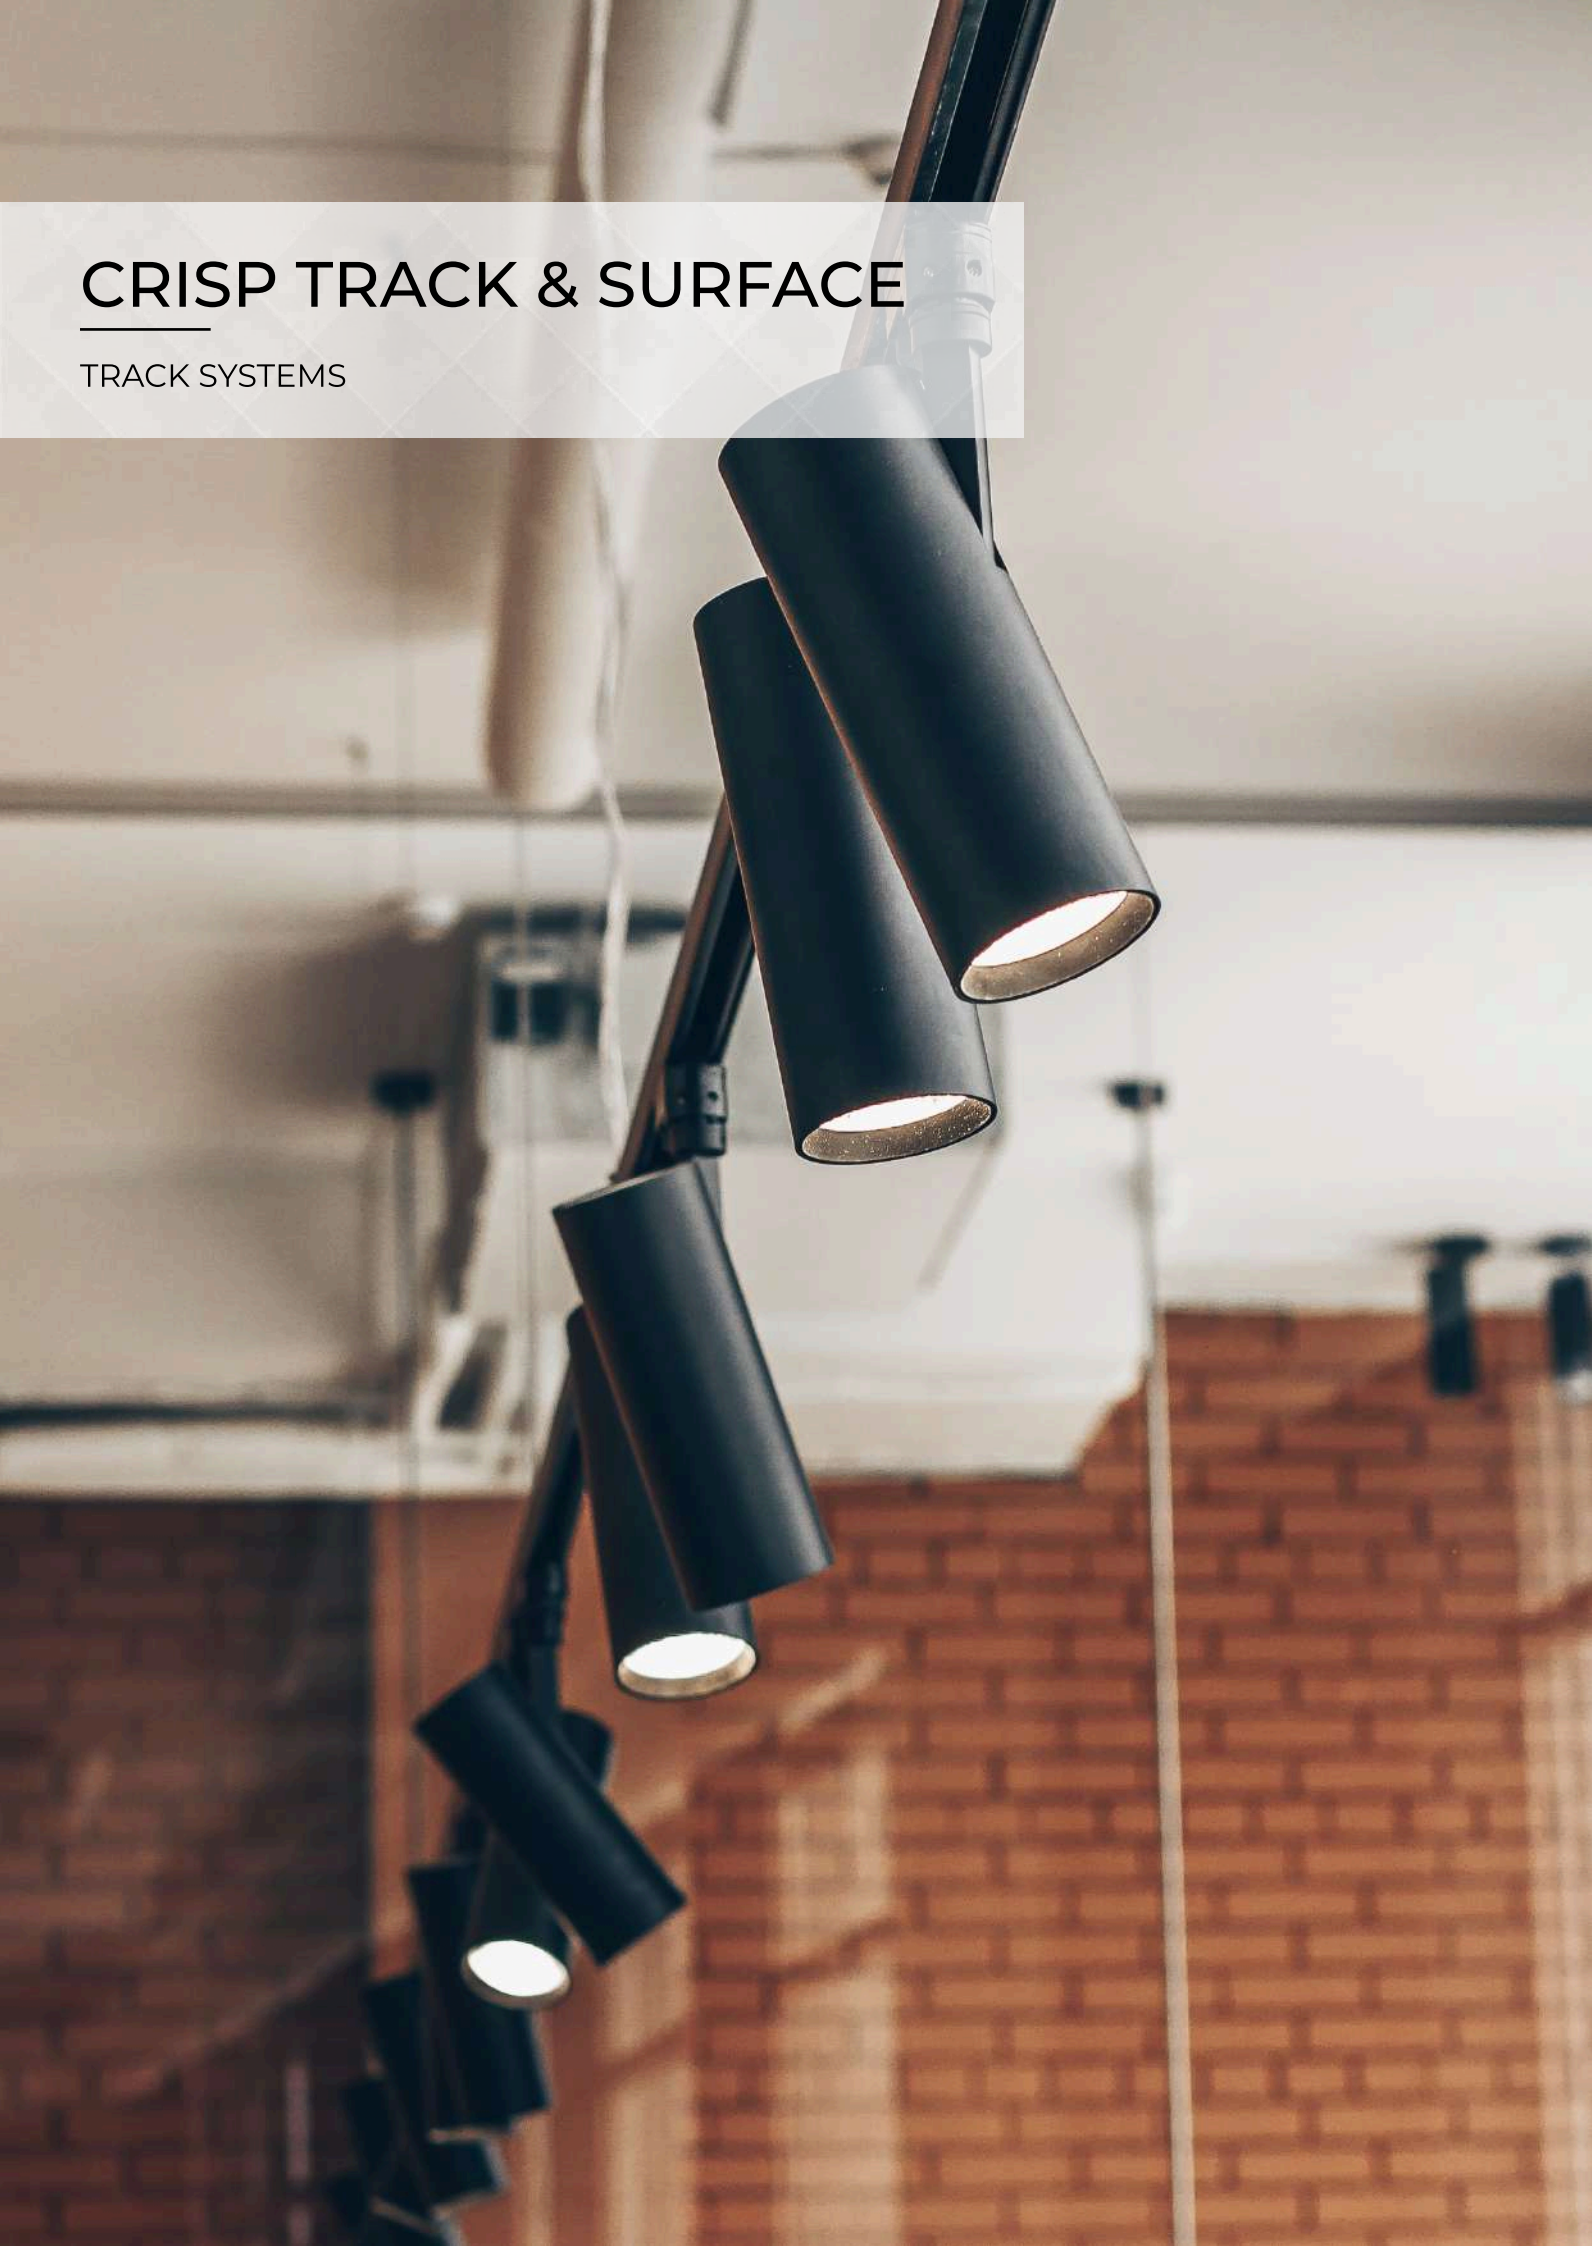

CRISP TRACK & SURFACE

TRACK SYSTEMS



11510 CRISP TRACK.1.10.BLK.BLK.36.50100 .30G

Outer Size(mm) : Dia 50x100(H)
Cut Out Size : N.A.
Wattage : 10W




11510 CRISP SURFACE.1.10.BLK.BLK.36.50100 .30G

Outer Size(mm) : Dia 50x100(H)
Cut Out Size : N.A.
Wattage : 10W

PRODUCT PROPERTIES

LED	Osram	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	240V / 50Hz	CRI	>90
PRODUCT FINISH	Matt White / Black	SWIVEL / FIXED	355°
REFLECTOR FINISH	Black	BEAM ANGLE	36°
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Osram
		CCT	3000k, 4000k, 6500k



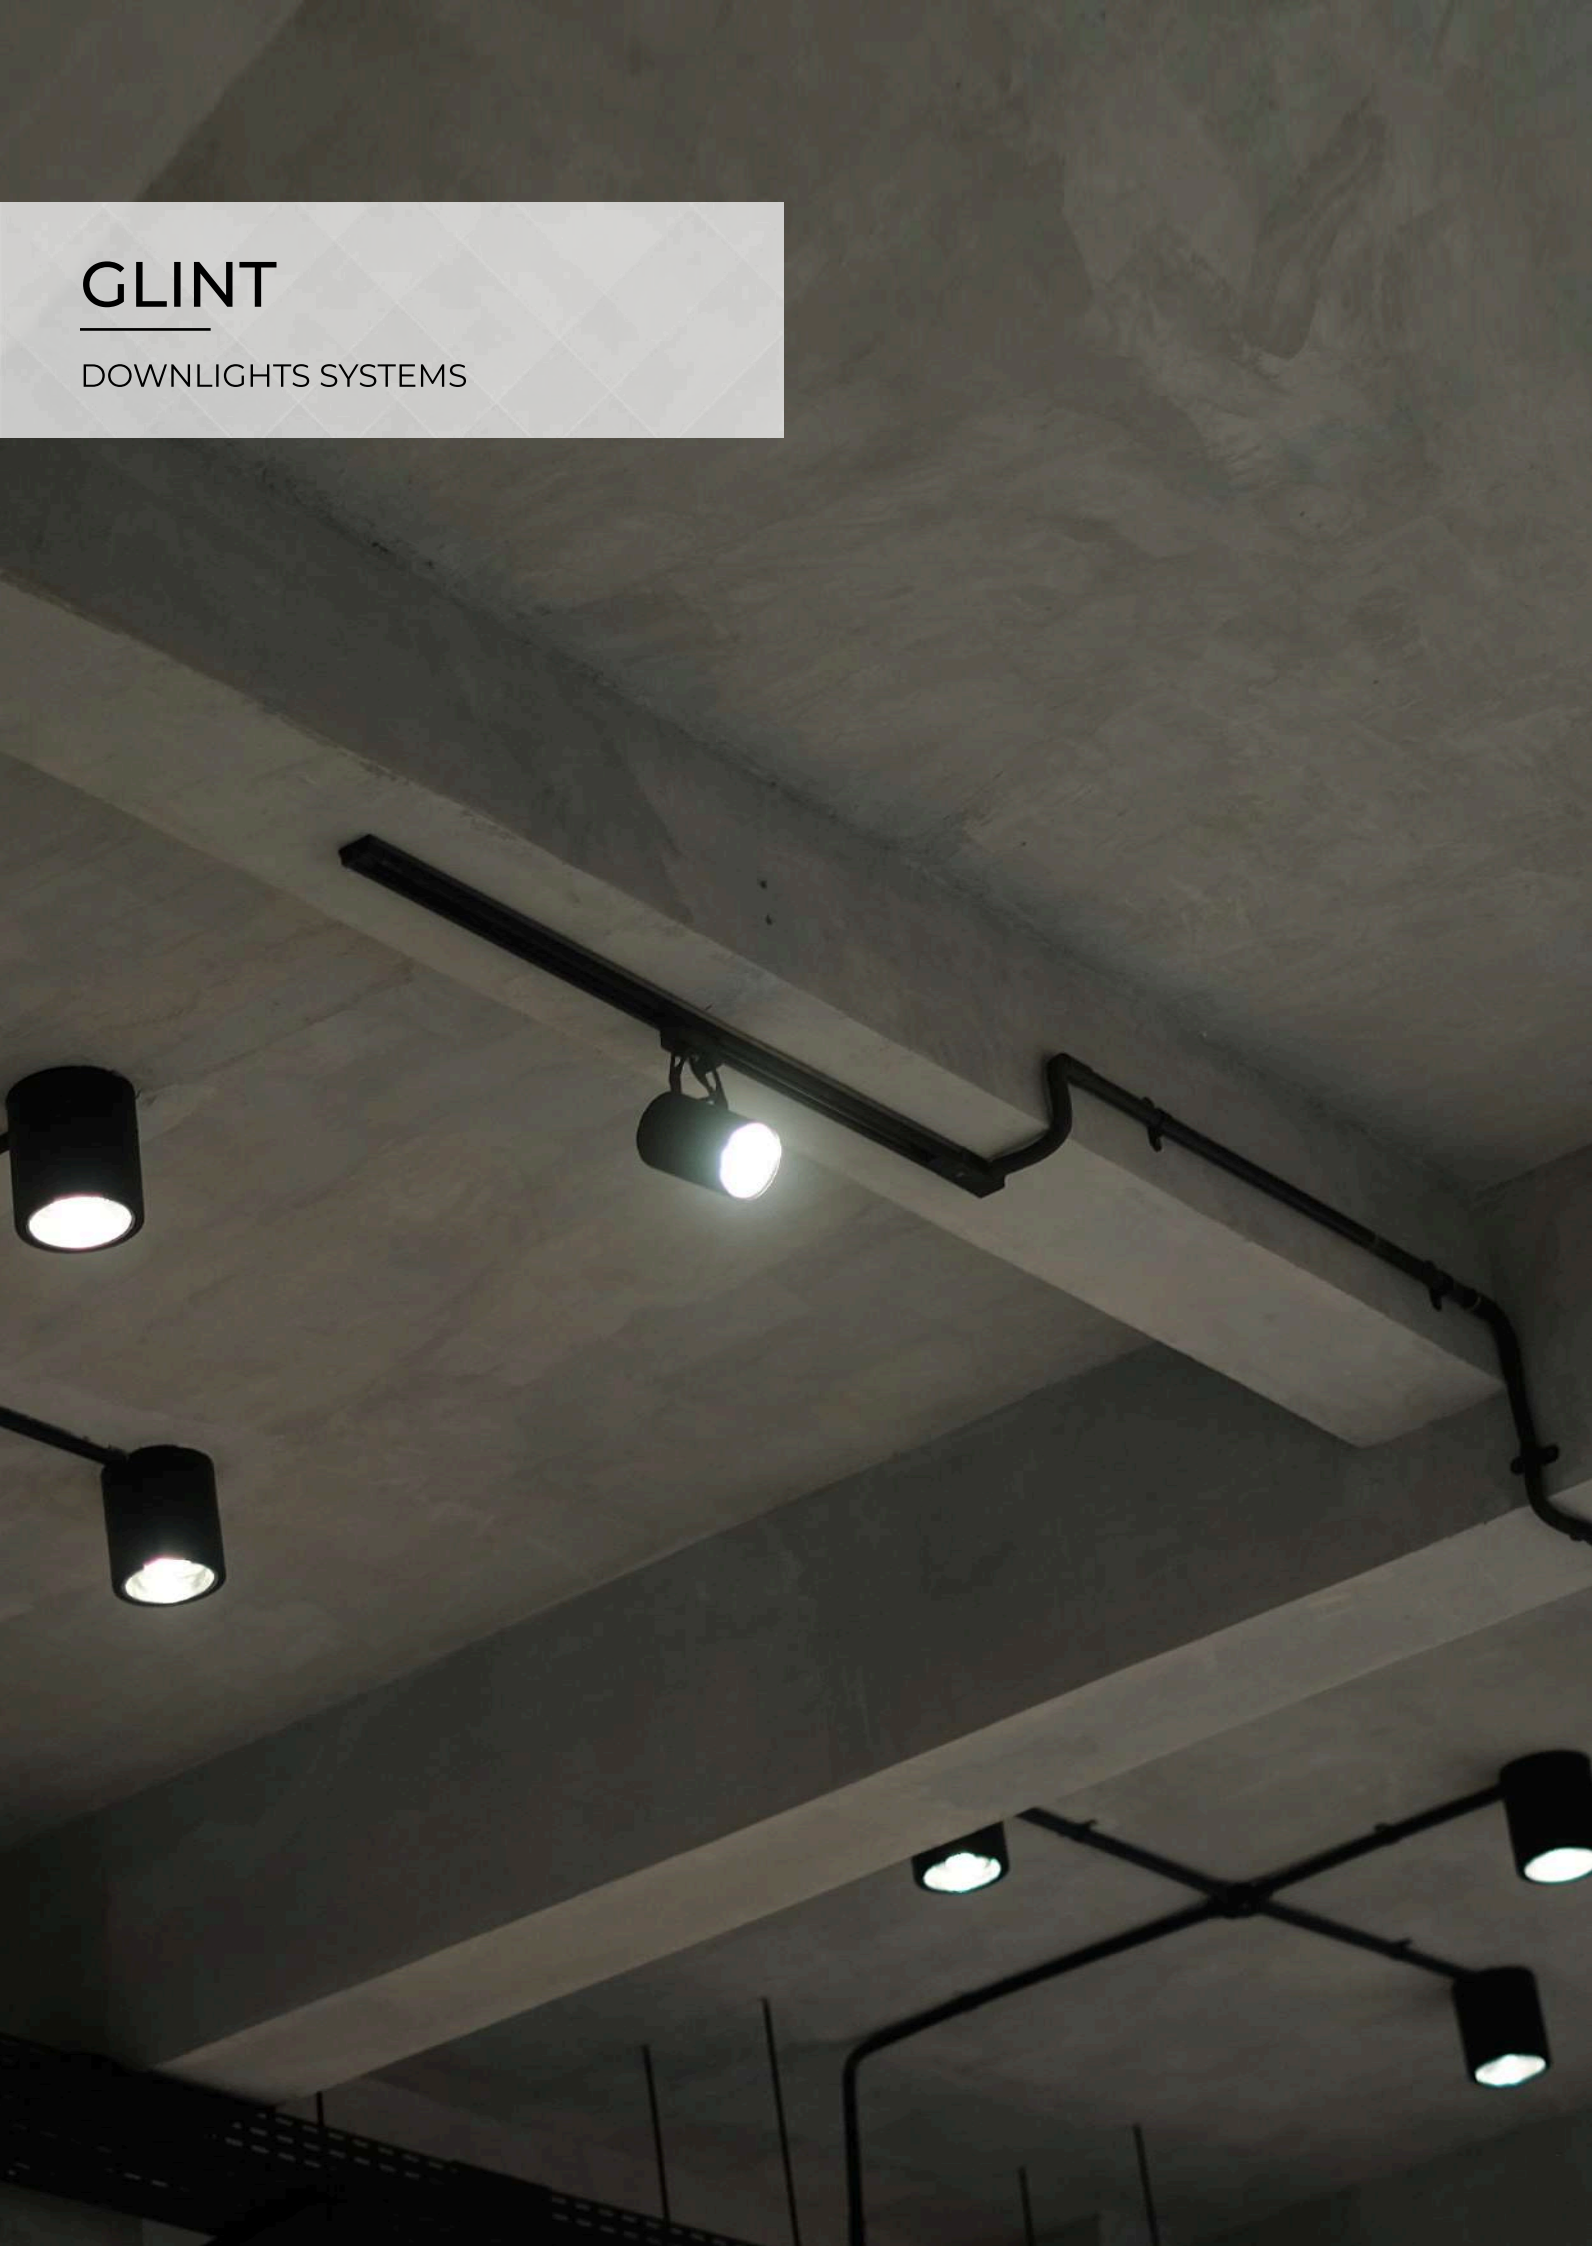

GLINT

DOWNLIGHTS SYSTEMS



GLINT.1.7.MB.MB.120.SF.40S

Outer Size(mm) : Dia 87x87(H)
Wattage : 7W




GLINT.1.12.MB.MB.120.SF.40S

Outer Size(mm) : Dia 128x128(H)
Wattage : 12W

PRODUCT PROPERTIES

LED	Edison	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>80
PRODUCT FINISH	Matt White / Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt White / Matt Black	BEAM ANGLE	120°
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Philips
		CCT	3000k, 4000k, 6500k



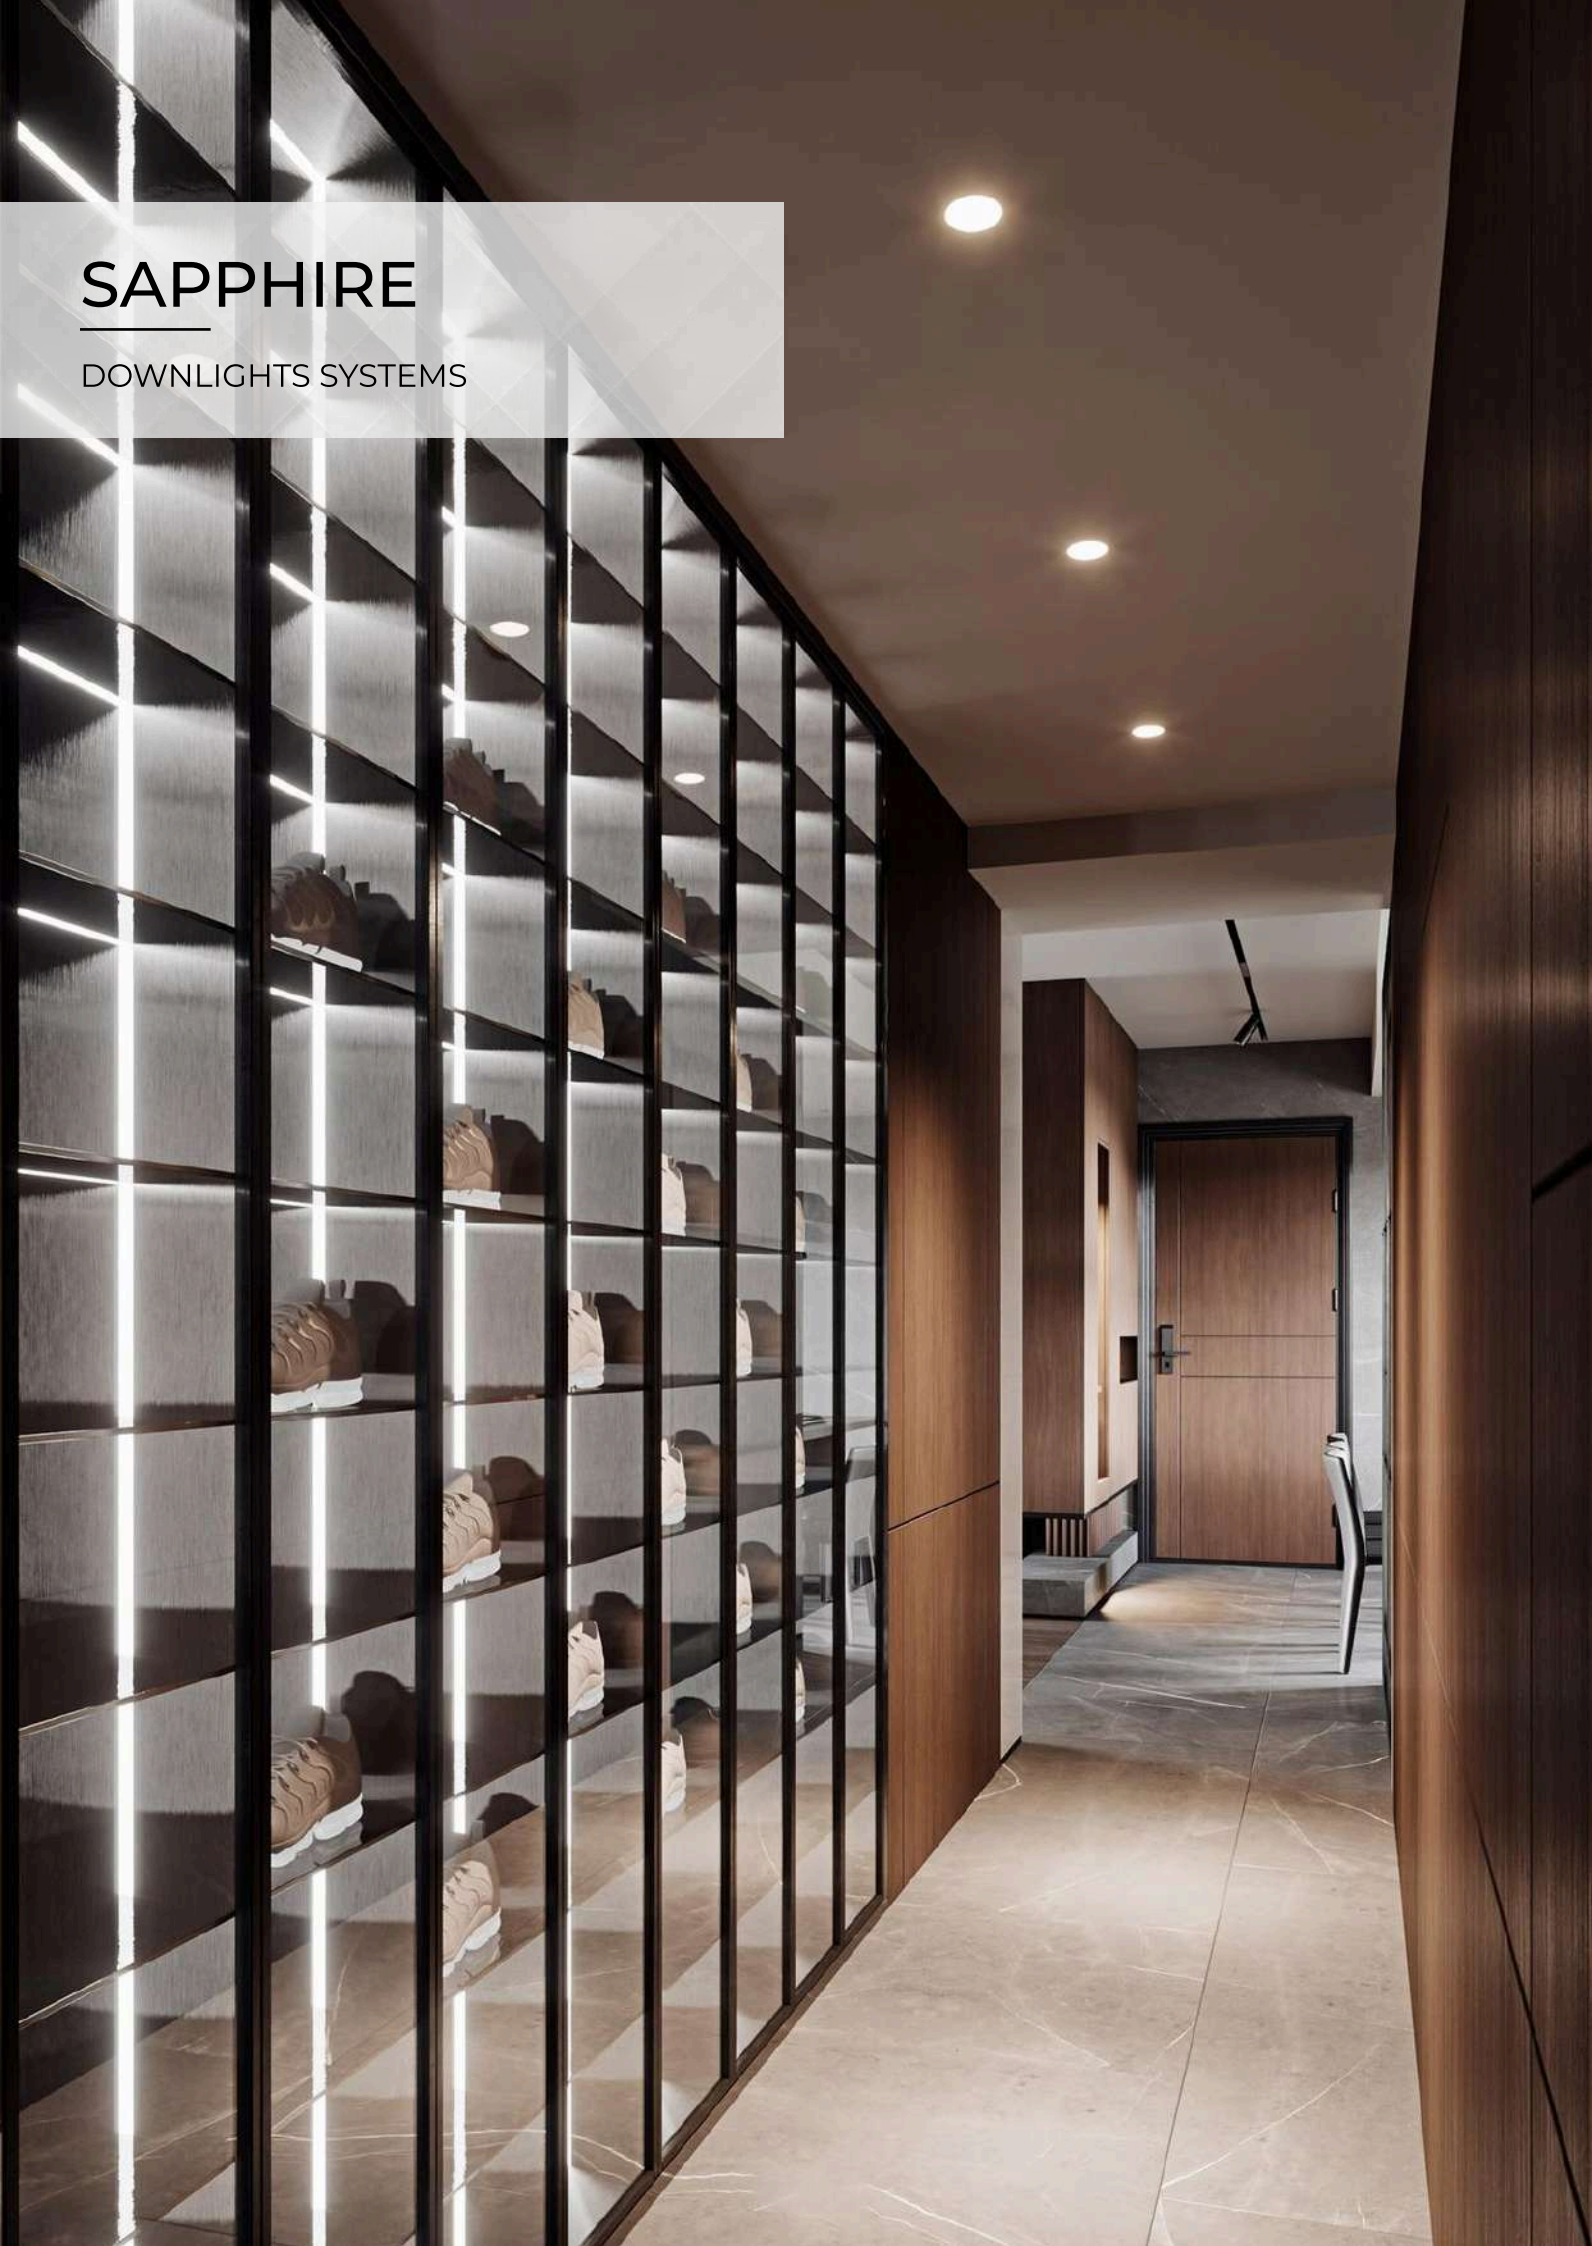

SAPPHIRE

DOWNLIGHTS SYSTEMS



SAPPHIRE.1.12.MW.MW.120.108.30G

Outer Size(mm) : Dia 120x53(H)
Cut Out Size : Dia 108mm
Wattage : 12W





SAPPHIRE.1.18.MW.MW.120.142.30G

Outer Size(mm) : Dia 153x57(H)
Cut Out Size : Dia 142mm
Wattage : 18W

PRODUCT PROPERTIES

LED	Edison	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>80
PRODUCT FINISH	Matt White / Matt Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Matt White / Matt Black	BEAM ANGLE	Flood
IP RATING	IP 20	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Philips
		CCT	3000k, 4000k, 6500k

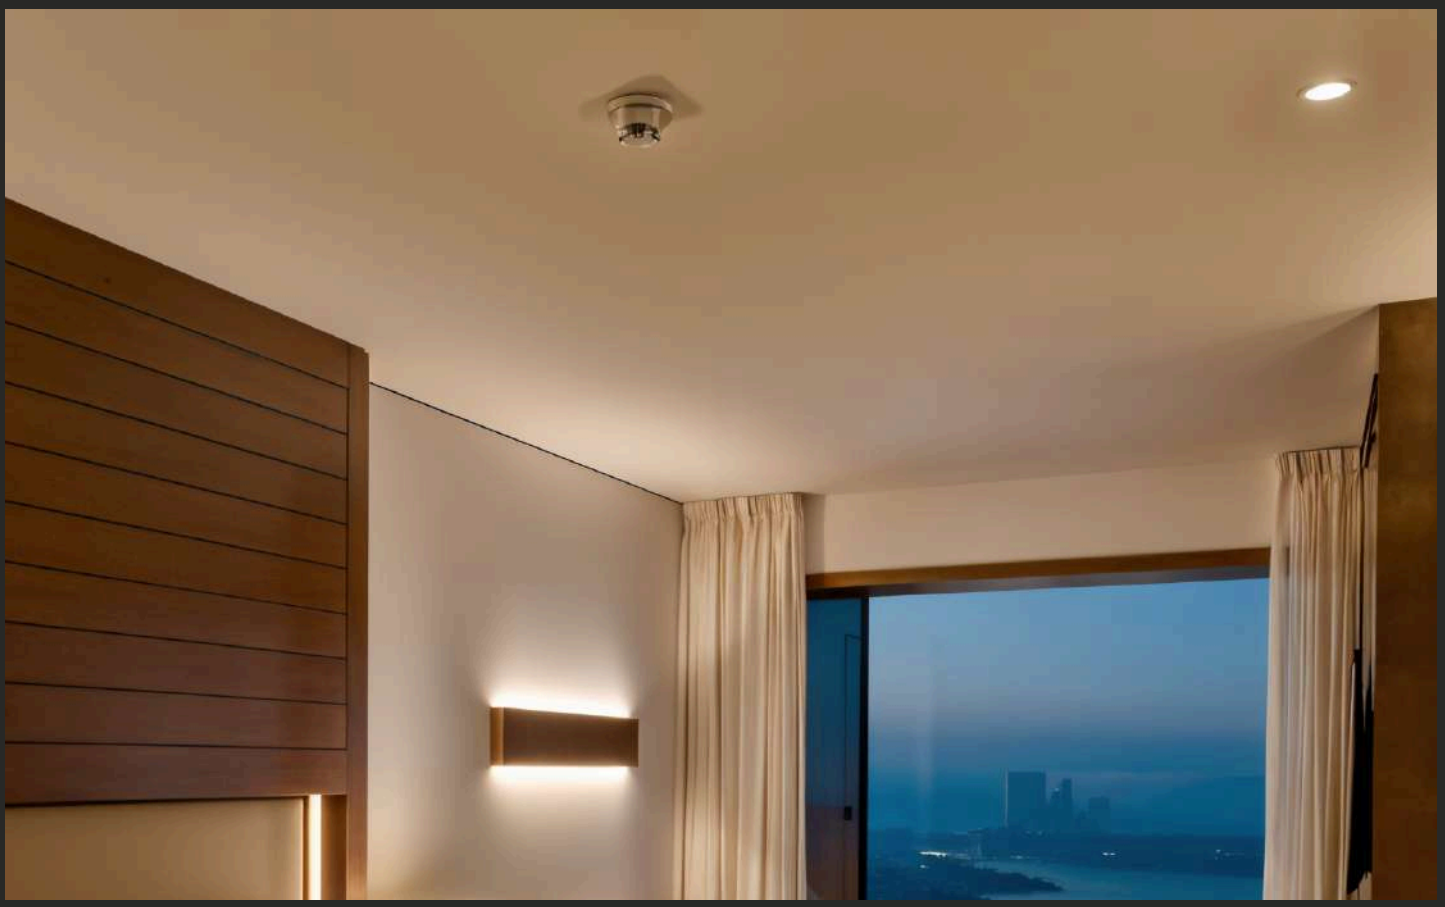

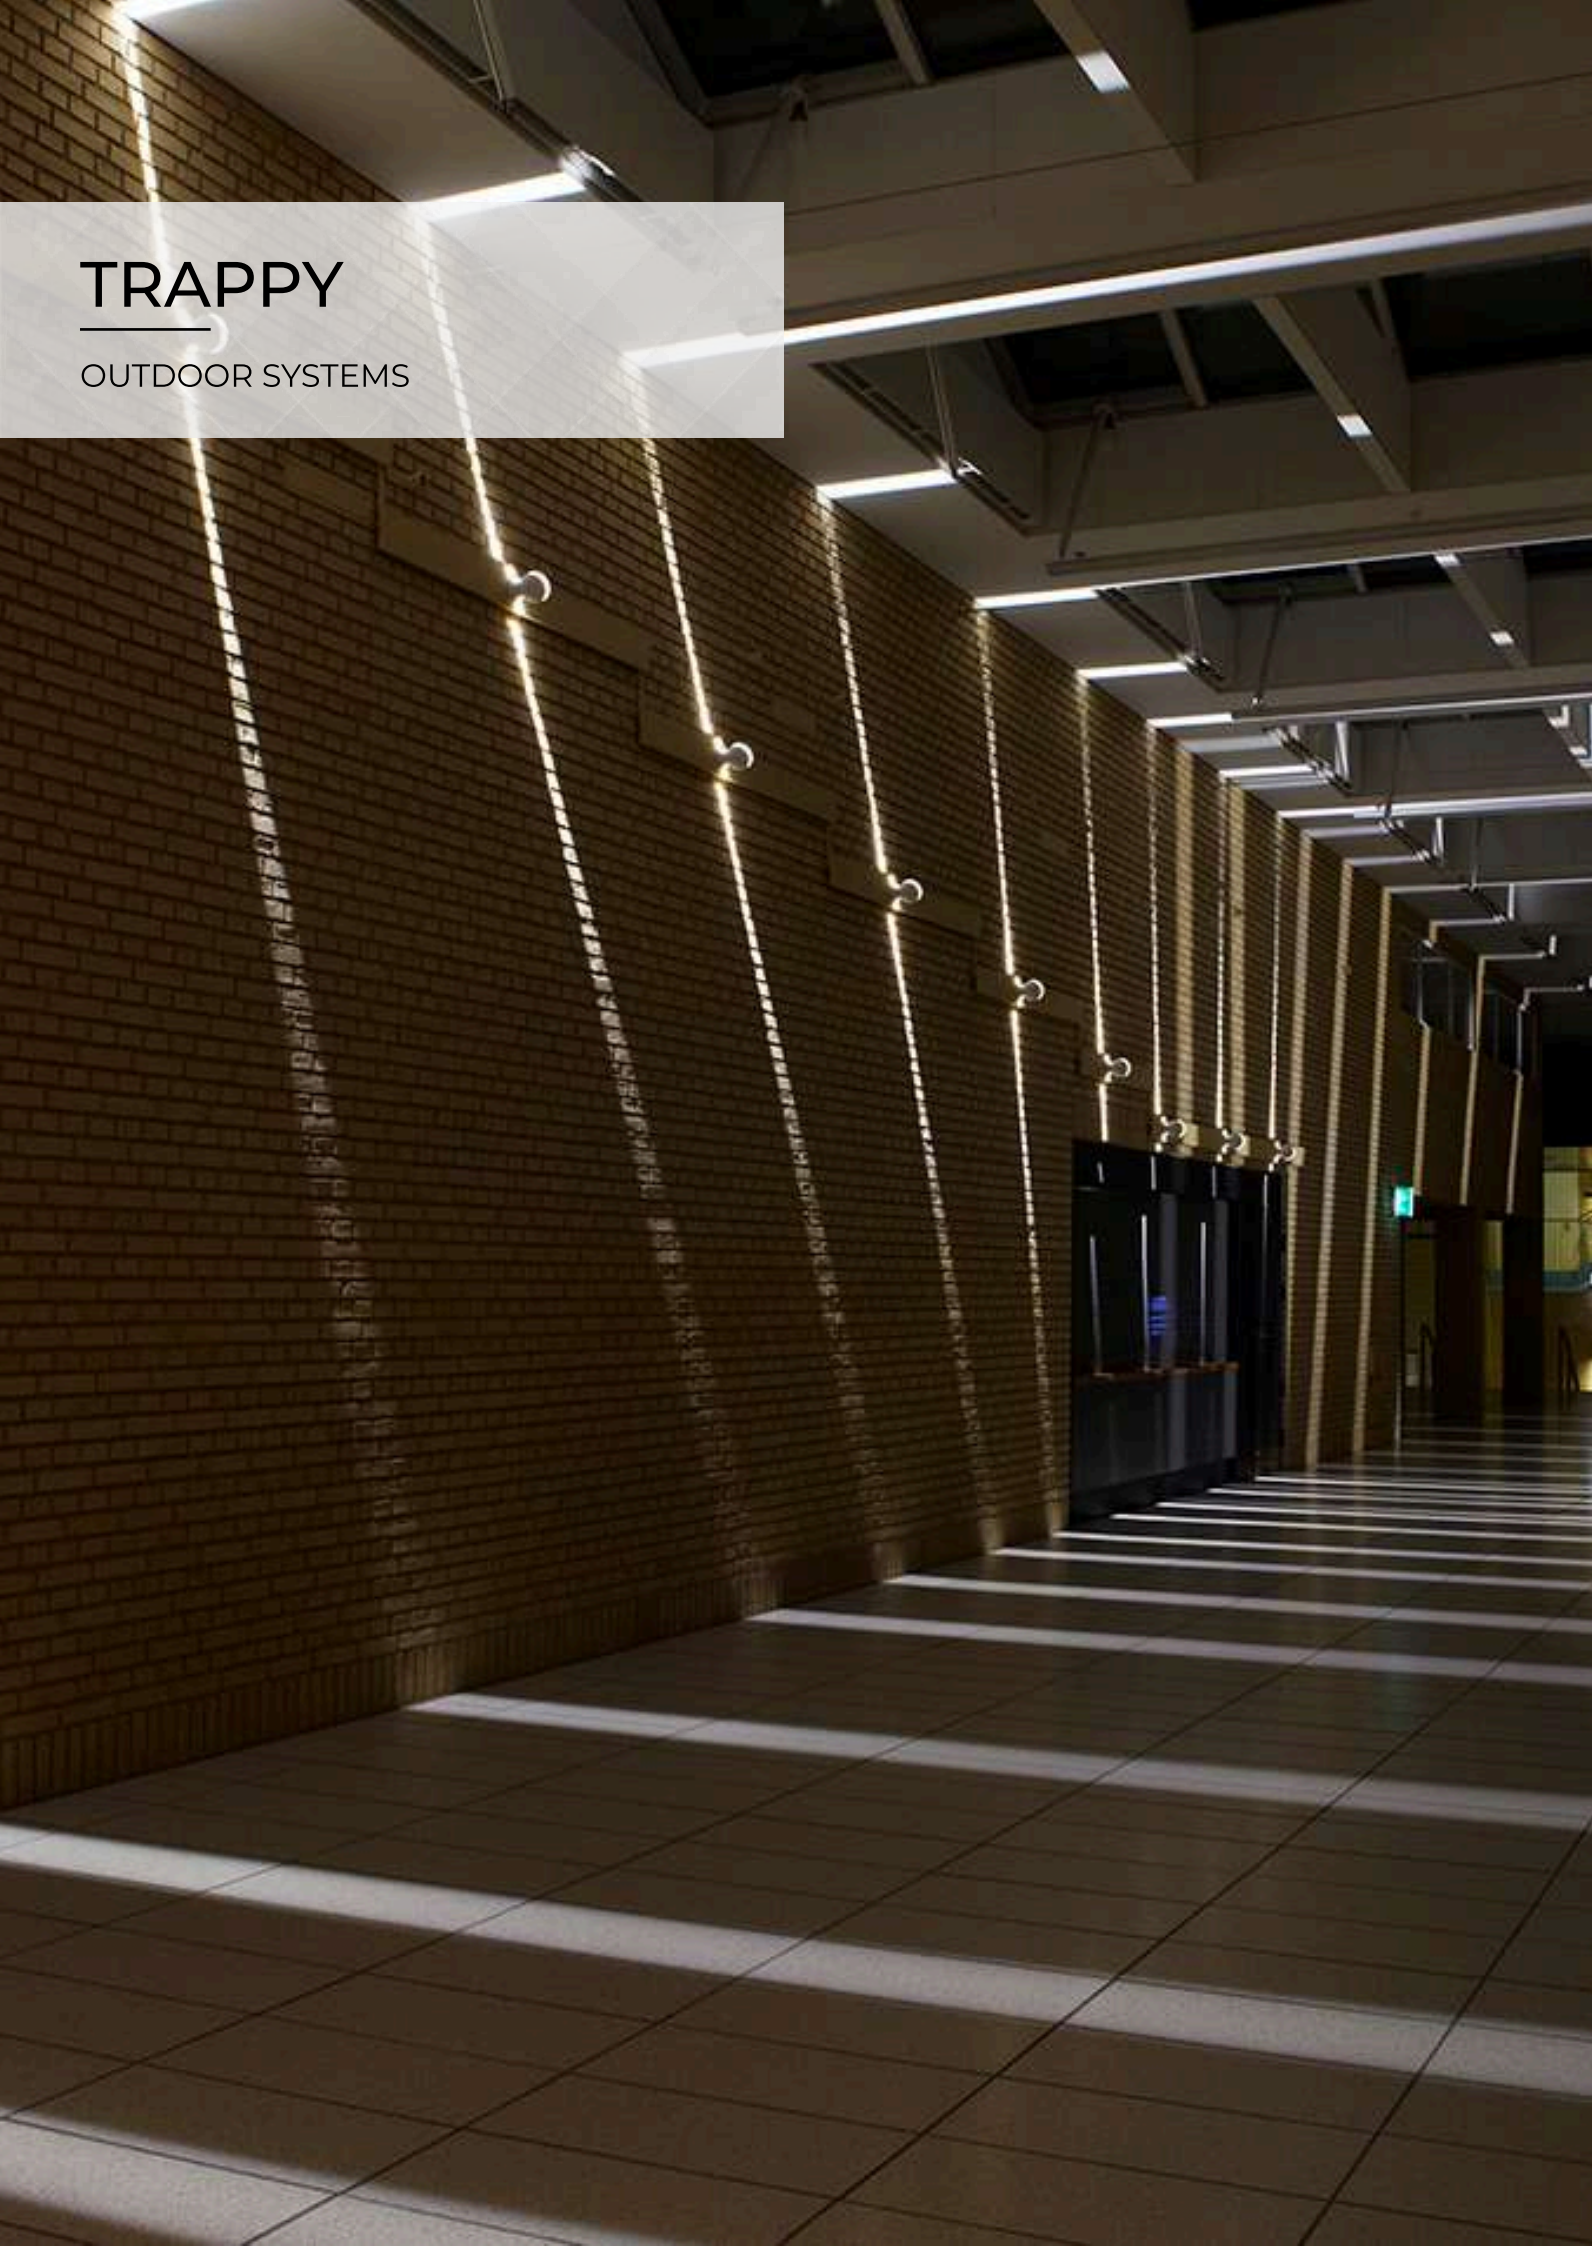

TRAPPY

OUTDOOR SYSTEMS




TRPY180.1.8.SB.SB.180.SF.30S

Outer Size(mm) : 153(L)x80.4(W)x94(H)
Cut Out Size : N.A.
Wattage : 8W, 15W

PRODUCT PROPERTIES


LED	Cree	HOUSING MATERIAL	Aluminium Die Cast
INPUT VOLTAGE	220-240V ac	CRI	>90
PRODUCT FINISH	Sand Black	SWIVEL / FIXED	Fixed
REFLECTOR FINISH	Sand Black	BEAM ANGLE	10x180°
IP RATING	IP 65	DIMMABLE	Triac / Analogue / Dali (on request)
OPERATING TEMPERATURE	0-50°c	DRIVER BRAND	Eaglerise (Internal)
		CCT	3000k

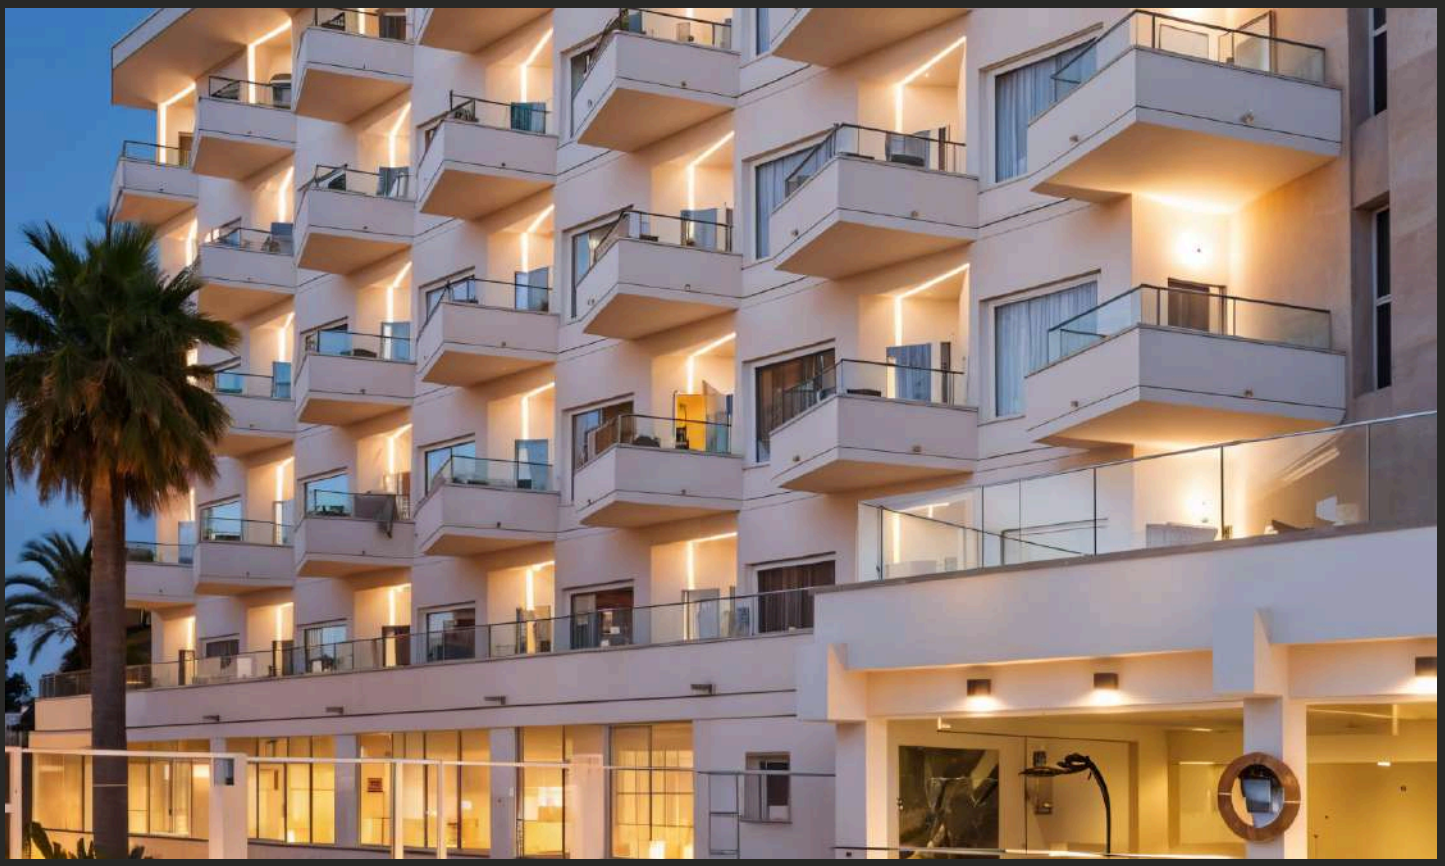



Nomenclature

Scintilla series product nomenclature is made keeping in mind accuracy to enhance the delivery experience.

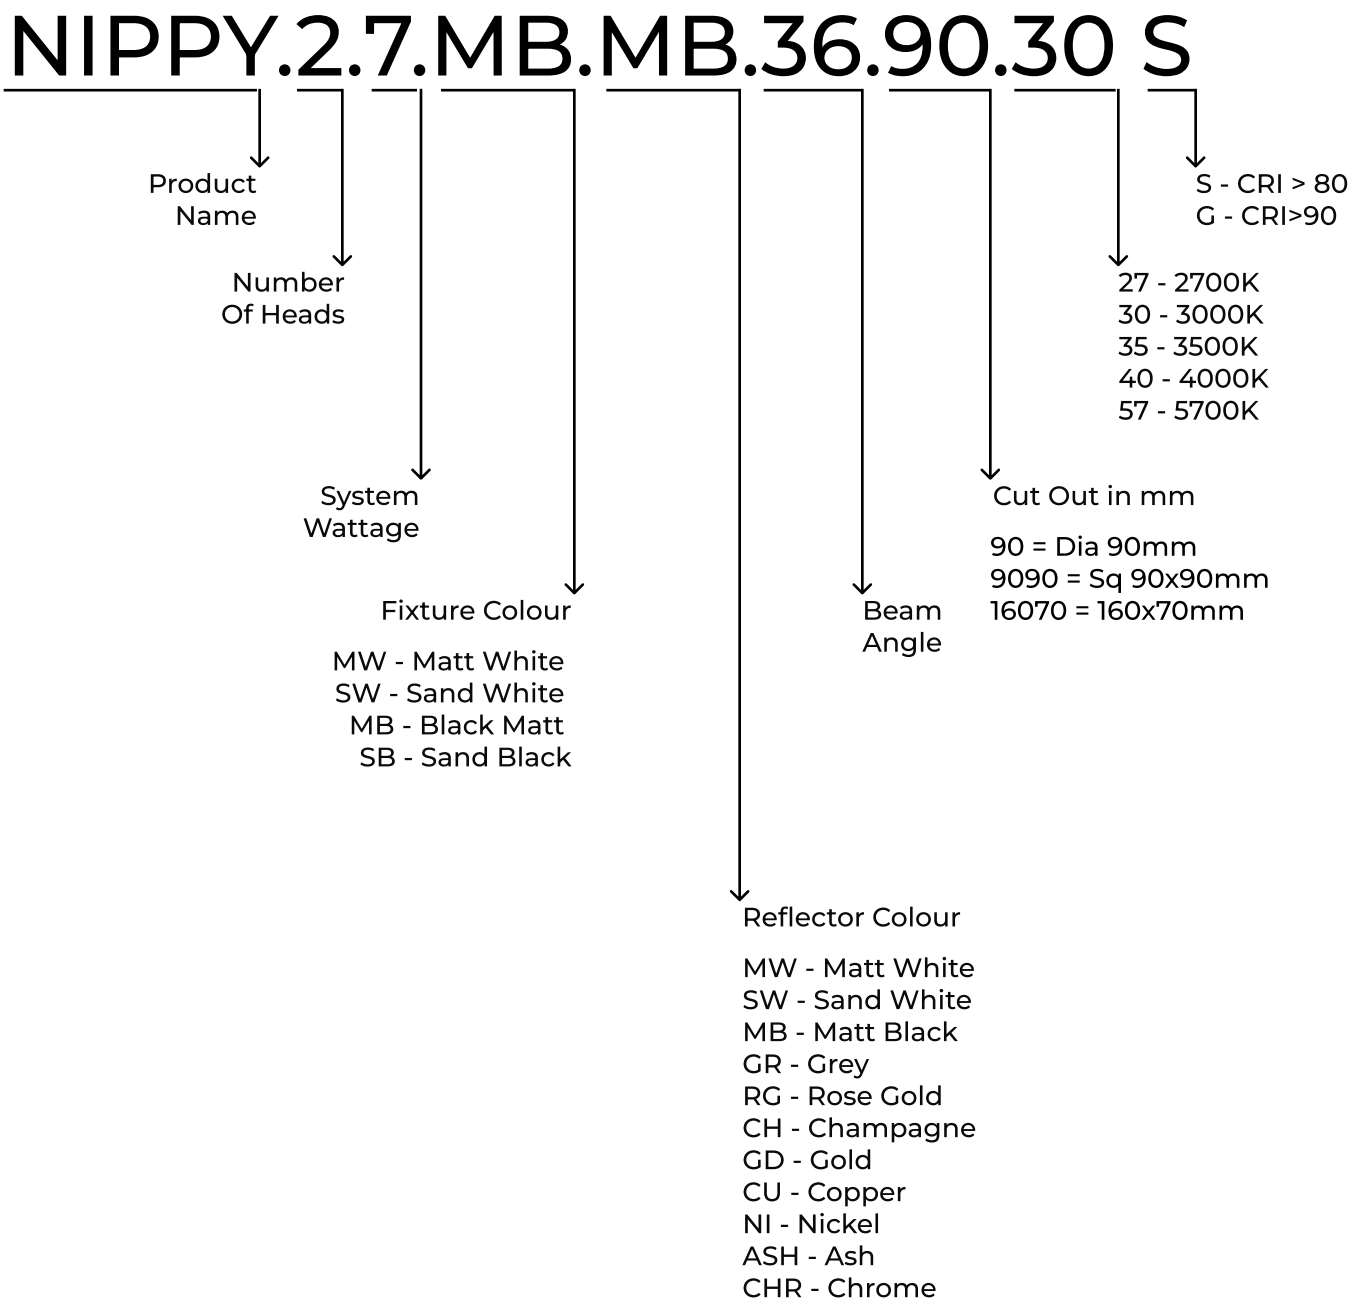


Qulite™